


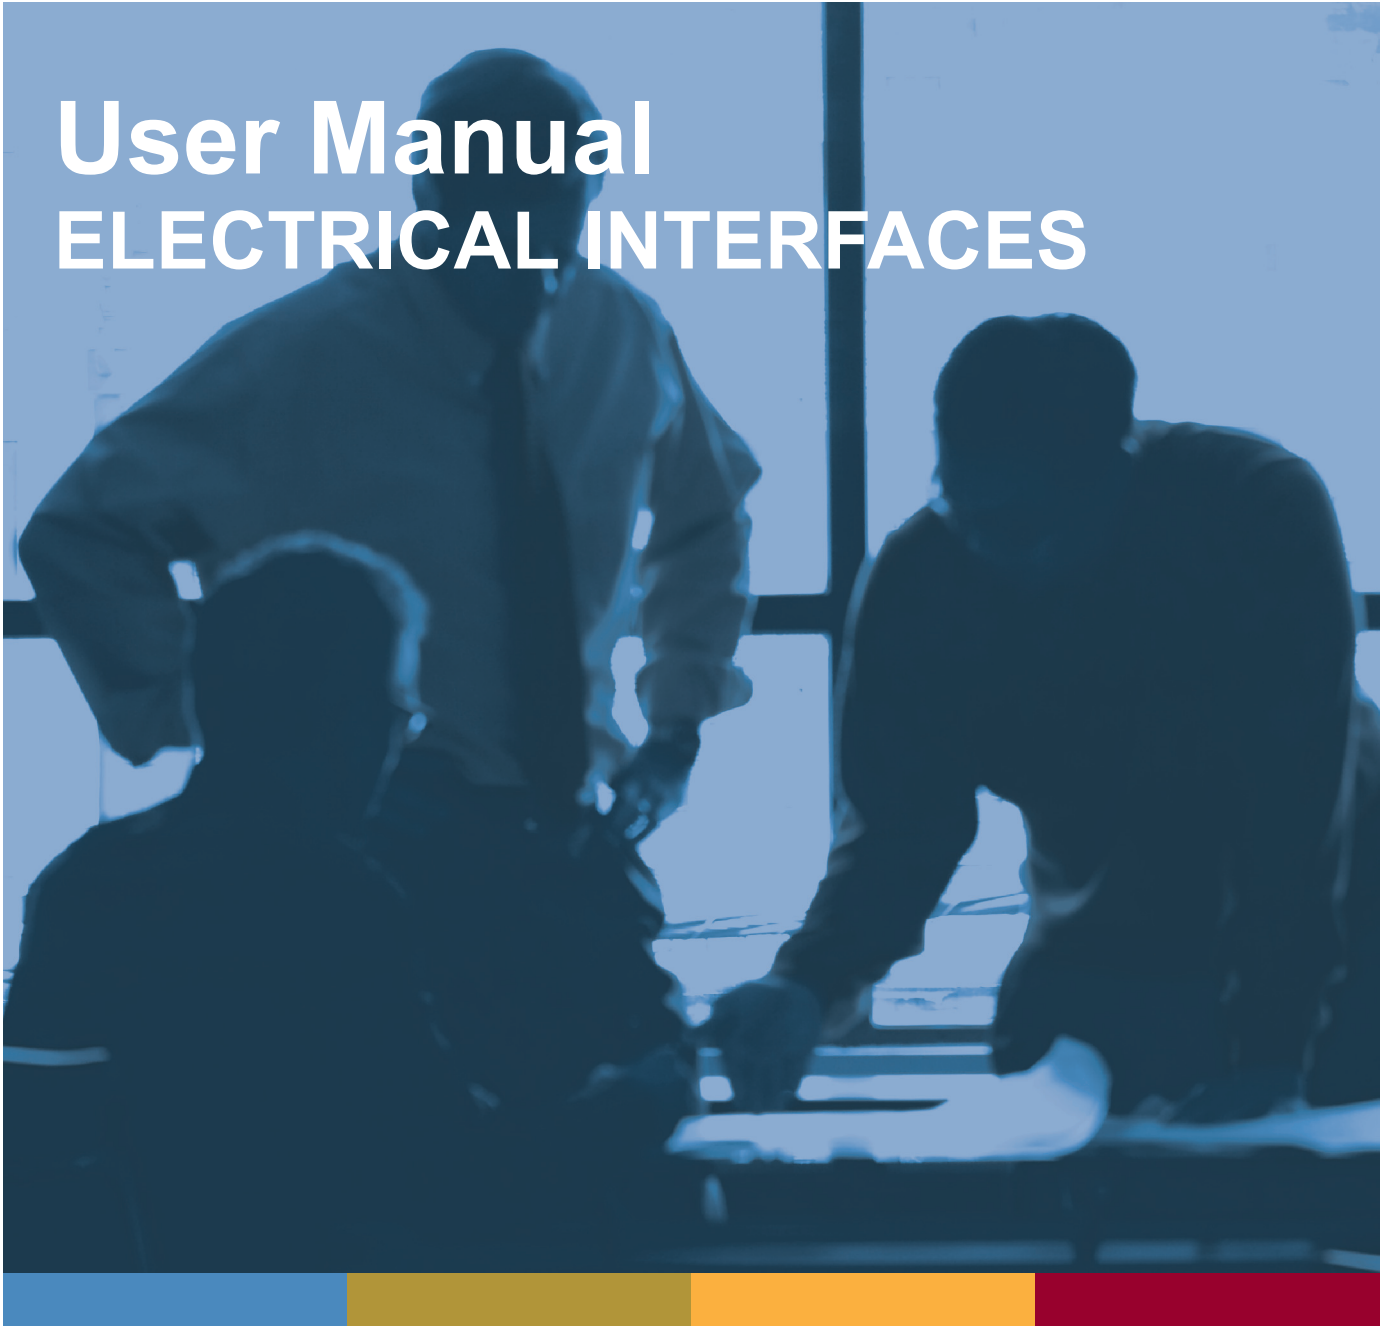

User Manual

ELECTRICAL INTERFACES

DESCRIPTION OF THE ELECTRICAL
INTERFACES FOR THE SERIES
D636, D637, D638, D639, D67X, D930, D94X
AND THE RKP-D

CA63420-001; Version 1.1, 13/07

Copyright

© 2013 Moog GmbH
Hanns-Klemm-Straße 28
71034 Böblingen
Germany
Telephone: +49 7031 622-0
Fax: +49 7031 622-191
E-mail: sales@moog.com
Internet: <http://www.moog.com/Industrial>

All rights reserved.

No part of this user information may be reproduced in any form (print, photocopies, microfilm, or by any other means) or edited, duplicated, or distributed with electronic systems without the prior written consent of Moog.

Contraventions of the above requirement shall entitle Moog to compensation in damages.

Subject to change without notice.

Table of Contents

Copyright	A
List of Tables	v
List of Figures	vi
1 General Information	1
1.1 Notes on user information	1
1.1.1 Changes and validity	1
1.1.2 Completeness	2
1.1.3 Storage location	2
1.1.4 Typographical conventions	3
1.2 Intended operation	4
1.3 Selection and qualification of personnel	5
1.4 Trademarks	5
2 Safety	7
2.1 Handling in accordance with safety requirements	7
2.2 Occupational safety and health	8
2.3 General safety instructions	8
2.4 ESD	9
2.5 Safety instructions for installation and maintenance	9
2.5.1 Protective grounding and electrical shielding	10
2.5.2 Moog Valve Configuration Software	11
3 Function and Method of Operation	13
3.1 Block diagram	13
3.2 Analog inputs/outputs	14
3.3 Digital inputs/outputs	14
3.4 Digital signal interface	14
3.5 Field bus interfaces	15
3.5.1 CAN bus interface	15
3.5.2 Profibus-DP interface	16
3.5.3 EtherCAT® interface	16
3.6 External LVDT	17
3.7 Service interface	17
3.8 Pilot valve interface	17
3.9 Status LEDs	17
4 Electrical Interfaces	19
4.1 Connector X1	19
4.1.1 Pin assignment of connector X1	19
4.1.1.1 Pin assignment of 6+PE-pin connector	19
4.1.1.2 Pin assignment, 11+PE-pin connector (variant Q)	20
4.1.1.3 Pin assignment, 11+PE-pin connector (variant p/Q, pump)	21
4.1.2 Mating connector for connector X1	21
4.1.3 Power supply	22
4.1.4 Supply to the 4/2- or 2/2-way seat valve	22
4.1.5 Analog inputs	23
4.1.5.1 Signal types	23

4.1.6 Analog outputs	25
4.1.6.1 Analog outputs 4–20 mA	25
4.1.6.2 Analog outputs 2–10 V	25
4.1.7 Digital inputs	25
4.1.7.1 Release signal input	25
4.1.8 Digital outputs	25
4.2 Connector X2 for digital signal interface	26
4.2.1 Incremental transducer	26
4.2.2 SSI transducer	28
4.2.3 LocalCAN	29
4.2.3.1 Pin assignment, LocalCAN connector X2 (M12, 5-pin)	30
4.2.3.2 Pin assignment, LocalCAN connector X2 (M8, 3-pin)	31
4.3 Field bus connectors X3 and X4	31
4.3.1 CAN connectors	31
4.3.1.1 Technical data for the CAN bus interface	31
4.3.1.2 Pin assignment, CAN connectors	32
4.3.2 Profibus-DP connectors	32
4.3.2.1 Technical data for the Profibus-DP interface	32
4.3.2.2 Pin assignment, Profibus-DP connectors	33
4.3.3 EtherCAT® connectors	33
4.3.3.1 Technical data for the EtherCAT® interface	33
4.3.3.2 Pin assignment, EtherCAT® connectors	34
4.4 Analog input connectors X5, X6 and X7	35
4.4.1 Pin assignment, analog input connectors X5, X6 and X7	35
4.4.2 Signal types	36
4.4.2.1 Signal type for the analog input: ±10 V	36
4.4.2.2 Signal type for the analog input: 0–10 V	36
4.4.2.3 Signal type for the analog input: 0–10 mA	36
4.4.2.4 Signal type for the analog input: 4–20 mA	37
4.4.3 Input resistances	37
4.5 Connector X8 for external LVDT	38
4.6 Plug connection X9 for 4/2- or 2/2-way seat valve	38
4.7 Service connector X10	39
4.8 Pilot valve connector X11	39
5 Status display	41
5.1 Module status LED «MS»	41
5.2 Network status LED «NS»	42
5.2.1 Valves/pumps with CAN bus interface	42
5.2.2 Valves with Profibus-DP interface	43
5.2.3 Valves with EtherCAT® interface	44
6 Wiring	47
6.1 General notes on wiring	47
6.1.1 Tools and materials required	47
6.1.2 Procedure	47
6.1.3 Wiring supply cables and digital and analog signals	48
6.2 Protective grounding and electrical shielding	48
6.2.1 Overview	48
6.2.2 Equipotential bonding and protective grounding	49
6.2.2.1 General principles	50
6.2.2.2 Protective conductor	50
6.2.2.3 Ground loops	51
6.2.3 Machines with deficient equipotential bonding	51

6.2.4 Electrical shielding.....	51
6.2.4.1 Cables	51
6.2.4.2 Connecting the shield	52
6.2.4.3 Insulated shielding.....	53
6.2.4.4 Cable routing	54
6.3 Permissible lengths for connection cables	54
6.3.1 Introduction.....	54
6.3.2 Typical values for copper cables	54
6.3.2.1 Resistance of cable	54
6.3.2.2 Capacitance of cable	54
6.3.3 24V supply cables	55
6.3.3.1 Voltage drop per unit length	55
6.3.3.2 Examples of the voltage drop of supply cables	56
6.3.4 Analog signal cables	56
6.3.5 Digital signal cables.....	58
6.3.5.1 Digital signal input cables	58
6.3.5.2 Digital signal output cables	58
6.3.5.3 Field bus cables	58
6.4 Wiring connector X1.....	59
6.4.1 Single-ended command signals	60
6.4.2 Conversion of actual value output signals I_{out}	61
6.4.2.1 Valves/pumps with 6+PE-pin connector X1	61
6.4.2.2 Valves/pumps with 11+PE-pin connector X1 (variant p/Q)	61
6.5 Wiring incremental transducers (X2).....	62
6.6 Wiring SSI transducers (X2)	63
6.6.1 SSI master mode.....	63
6.7 Wiring CAN networks (X2, X3, X4)	64
6.7.1 Cable lengths and cable cross sections	66
6.7.1.1 Suitable cable types for CAN networks	66
6.7.2 Permissible number of CAN bus nodes	67
6.7.3 CAN module address (node ID)	67
6.7.4 CAN transmission rate	67
6.8 Wiring Profibus-DP networks (X3, X4).....	68
6.8.1 Cable lengths and cable cross sections	69
6.8.1.1 Suitable cable types for Profibus-DP networks	69
6.8.2 Permissible number of Profibus nodes.....	69
6.8.3 Profibus-DP module address (node ID)	70
6.8.4 Profibus-DP transmission rate.....	70
6.9 Wiring EtherCAT® networks (X3, X4).....	71
6.9.1 Suitable cable types for EtherCAT® networks.....	72
6.9.2 Permissible number of EtherCAT® nodes	72
6.9.3 EtherCAT® module address (node ID)	73
6.9.3.1 Auto-increment addressing	73
6.9.3.2 Fixed node addressing	73
6.9.4 EtherCAT® transmission rate	73
6.10 Wiring analog inputs (X5, X6, X7)	74
6.10.1 2-wire transducers.....	74
6.10.2 3-wire transducers.....	74
6.10.3 4-wire transducers.....	75
7 Starting-up	77
7.1 Electromagnetic compatibility (EMC)	77
7.2 Communication via the Moog Valve Configuration Software	77

8 Trouble shooting	79
8.1 Communication problems in networks	79
8.1.1 General trouble shooting	79
8.1.1.1 LED «MS» not shining	79
8.1.2 Trouble shooting CANopen	79
8.1.2.1 No or disrupted communication	79
8.1.3 Trouble shooting Profibus-DP	80
8.1.3.1 No or disrupted communication	80
8.1.4 Trouble shooting EtherCAT®	81
8.1.4.1 LED «NS» not shining, no communication	81
8.1.4.2 LED «NS» flashing/shining orange, no or disrupted communication	81
8.1.4.3 LED «NS» flashing/shining, network status does not reach 'PRE-OPERATIONAL'	82
8.1.4.4 LED «NS» flashing/shining orange, network status does not reach 'SAVE-OPERATIONAL' or 'OPERATIONAL'	82
9 Additional Documentation and Accessories	83
9.1 Additional documentation	83
9.2 Accessories	84
10 Index	85
11 Appendix	93
11.1 Abbreviations, symbols, specialist terms	93
11.2 Additional literature	95
11.2.1 CAN fundamentals	95
11.2.2 Profibus fundamentals	95
11.2.3 EtherCAT® fundamentals	95
11.2.4 Moog publications	96
11.3 Quoted standards	96
11.3.1 CiA DSP	96
11.3.2 DIN EN	96
11.3.3 DIN EN ISO	97
11.3.4 IEC	97
11.3.5 IEEE	97
11.3.6 ISO/DIS, ISO/IEC	97
11.3.7 TIA/EIA	97

List of Tables

Table 1:	Allocation of interfaces to connectors	14
Table 2:	Nominal voltage/nominal power of the 4/2- or 2/2-way seat valve	22
Table 3:	Technical data for the LocalCAN interface	29
Table 4:	Technical data for the CAN bus interface	31
Table 5:	Technical data for the Profibus-DP interface	32
Table 6:	Technical data for the EtherCAT® interface	33
Table 7:	Input resistances X5, X6, X7	37
Table 8:	States of the module status LED «MS»	41
Table 9:	States of the network status LED «NS» on valves/pumps with CAN bus interface	42
Table 10:	States of the network status LED «NS» on valves/pumps with Profibus-DP interface	43
Table 11:	States of the Run LED «RUN» on valves/pumps with EtherCAT® interface	44
Table 12:	States of the Link/Activity LEDs «L/A in» and «L/A out» on valves/pumps with EtherCAT® interface	44
Table 13:	States of the network status LEDs «NS in» and «NS out» on valves/pumps with EtherCAT® interface	45
Table 14:	Benefits of the different signal types for analog inputs	48
Table 15:	Examples of the voltage drop of supply cables as a function of the cable length for a cable cross section of 0.75 m ²	56
Table 16:	Designations of incremental transducer connections (incremental transducers of different manufacturers)	63
Table 17:	Recommendation for maximum cable lengths in CAN networks, depending on the transmission rate	66
Table 18:	Recommendation for maximum cable lengths in CAN networks, depending on the cable cross section and the number n of CAN bus nodes	66
Table 19:	Maximum permissible stub cable lengths in CAN networks	66
Table 20:	Specification of electrical data for CAN bus cables	66
Table 21:	Suitable cable types for CAN networks	66
Table 22:	Recommendation for maximum cable lengths in Profibus-DP networks, depending on the transmission rate	69
Table 23:	Specification of electrical data for Profibus-DP cables (as per type A)	69
Table 24:	Suitable cable types for Profibus-DP networks	69
Table 25:	Assignment of Ethernet/EtherCAT® signals with mixed connector types	72
Table 26:	Suitable cable types for EtherCAT® networks	72
Table 27:	Additional documentation	83
Table 28:	Accessories	84
Table 29:	Abbreviations, symbols, specialist terms	93

List of Figures

Figure 1: Block diagram of the valve/pump electronics	13
Figure 2: 6+PE-pin connector X1	19
Figure 3: 11+PE-pin connector X1 (variant Q).....	20
Figure 4: 11+PE-pin connector X1 (variant p/Q, pump).....	21
Figure 5: Incremental transducer connector X2 (M12, 8-pin)	26
Figure 6: SSI transducer connector X2 (M12, 8-pin)	28
Figure 7: LocalCAN connector X2 (M12, 5-pin).....	30
Figure 8: LocalCAN connector X2 (M8, 3-pin).....	31
Figure 9: CAN connectors X3 and X4 (M12, 5-pin)	32
Figure 10: Profibus-DP connectors X3 and X4 (M12, 5-pin)	33
Figure 11: EtherCAT® connectors X3 and X4 (M12, 4-pin).....	34
Figure 12: Analog input connectors X5, X6 and X7 (M8, 4-pin)	35
Figure 13: Equivalent circuit diagram of analog input.....	37
Figure 14: External LVDT connector X8 (M12, 5-pin)	38
Figure 15: Block diagram of the plug connection of the 4/2- or 2/2-way seat valve (with free-wheeling and light emitting diode)	38
Figure 16: Service connector X10 (M8, 3-pin).....	39
Figure 17: Layout of LEDs on front of housing of valve/pump electronics with CAN bus interface	42
Figure 18: Layout of LEDs on front of housing of valve/pump electronics with Profibus-DP interface	43
Figure 19: LEDs on front of the housing of valve/pump electronics with EtherCAT® interface.....	44
Figure 20: Equipotential bonding and protective grounding of machines (see also DIN EN 60204-1) and electrical shielding of our valves/pumps with integrated electronics	49
Figure 21: Connecting the shield to the control cabinet's wall (detail A from Figure 20)	52
Figure 22: Connecting the cable shield via connector to the control cabinet's wall (detail A from Figure 20)	53
Figure 23: Connecting the insulated shielding to the control cabinet's wall (detail A from Figure 20)	53
Figure 24: Voltage drop on the supply cable	55
Figure 25: Wiring the 6+PE-pin connector X1	59
Figure 26: Wiring the 11+PE-pin connector X1	59
Figure 27: Circuit for single-ended command signals.....	60
Figure 28: Circuit for converting the actual value output signals I_{out} (for valves with 6+PE-pin connector X1)	61
Figure 29: Circuit for converting the actual value output signals I_{out} (for valves with 11+PE-pin connector X1)	61
Figure 30: Wiring diagram with incremental transducer	62
Figure 31: Incremental transducer signals A and B with reversal point and speed variation	62
Figure 32: Wiring diagram with SSI transducer	63
Figure 33: Signals between valve/pump and a 16-bit SSI transducer (example).....	63
Figure 34: CAN wiring diagram.....	65

Figure 35: Connection of valve/pump to a PC via the CAN bus interface (connector X3)	65
Figure 36: Connection of valve/pump to a PC via the service interface (service connector X10)	65
Figure 37: Profibus-DP wiring diagram	68
Figure 38: EtherCAT® wiring diagram	71
Figure 39: Twisted-pair wires in Ethernet/EtherCAT® cables with M12 connectors	72
Figure 40: Connecting a 2-wire transducer to analog input connectors X5, X6 or X7	74
Figure 41: Connecting a 3-wire transducer to analog input connectors X5, X6 or X7	74
Figure 42: Connecting a 4-wire transducer to analog input connectors X5, X6 or X7	75

For your notes.

1 General Information

1.1 Notes on user information

This user information is only complete in conjunction with the product-related documentation required for the relevant application.

⇒ Chapter "1.1.2 Completeness", page 2

Completeness

Please refer to the product-specific valve/pump user information for details on intended operation, selection and qualification of personnel, responsibilities, and warranty and liability.

This user information is concerned exclusively with the electrical connections of the valves/pumps. The instructions contain the most important information for ensuring proper and correct establishment of these connections.

⇒ Chapter "1.2 Intended operation", page 4

⇒ Chapter "2.1 Handling in accordance with safety requirements", page 7

The contents of this user information and the product-related documentation relevant to the particular application must be read, understood and followed in all points by each person responsible for machine planning, assembly and operation before work on the valves/pumps is started. This requirements applies in particular to the safety instructions.

⇒ Chapter "1.1.2 Completeness", page 2

⇒ Chapter "1.3 Selection and qualification of personnel", page 5

⇒ Chapter "2.1 Handling in accordance with safety requirements", page 7

This user information has been prepared with great care in compliance with the relevant regulations, state-of-the-art technology and our many years of knowledge and experience, and the full contents have been generated to the best of the authors' knowledge.

However, the possibility of error cannot be ruled out and improvements may be possible.

We would be pleased to receive your comments about possible errors and incomplete information.

1.1.1 Changes and validity

The information contained in this user information is valid and correct at the moment of release of this version of the user information. The version number and release date of this user information are indicated in the footer.

Changes may be made to this user information at any time and without reasons being given.

Subject to change without notice and validity of the user information

1.1.2 Completeness

The user information is complete when the following documents have been taken into consideration:

- Product-specific valve/pump user information (safety instructions and the product-specific documentation covering the hydraulic and mechanical functions)
- "Firmware" User Manual (product-specific documentation covering the programmed device and field-bus functions)
- "Electrical Connections" user information (this document)
- "Installation and Start-up Instructions" user information
- Valve/pump type specification

Additional application instructions and information are available on request.

**Completeness of
the user information**

1.1.3 Storage location

This user information together with all the product-related documentation relevant to the particular application must at all times be kept to hand close to the valve/pump or the higher-level machine.

**Storage location of
the user information**

1.1.4 Typographical conventions

DANGER



Denotes safety instructions which are intended to warn against an immediately imminent danger to life or limb or against serious damage to property.
Failure to comply with these safety instructions will inevitably result in fatalities, serious injuries (crippling/disablement) or serious damage to property!

Typographical conventions

WARNING



Denotes safety instructions which are intended to warn against a possible danger to life or limb or against possible serious damage to property.
Failure to comply with these safety instructions may result in fatalities, serious injuries (crippling/disablement) or serious damage to property!

CAUTION



Denotes safety instructions which are intended to warn against minor injuries or minor damage to property.
Failure to comply with these safety instructions may result in minor injuries or minor damage to property.



Denotes important notes/information

• or -

Denotes lists/enumerations



Denotes references to another chapter, another page, table or illustration in the user information

"..."

Denotes headings to the chapters or titles of the documents to which reference is being made

Blue text

Denotes hyperlinks in the PDF file

1., 2., ...

Denotes steps in a procedure which must be carried out in succession

«MS»

Denotes light emitting diodes on the valves/pumps (e.g.: «MS»)

'ACTIVE'

Denotes the valve/pump status (e.g.: 'ACTIVE')

1.2 Intended operation

WARNING

The valves/pumps may be operated exclusively within the framework of the data and applications specified in the product-specific valve/pump user information.

Use for other purposes or for purposes that extend beyond this description is not permitted.

Intended operation

Correct, reliable and safe operation of the valves/pumps requires qualified project planning as well as proper utilization, transportation, storage, installation, removal, electric and hydraulic connection, starting-up, configuration, operation, cleaning and maintenance.

The valves/pumps may only be started up when the following is ensured:

- The higher-level machine with all its installed components complies with the latest versions of the relevant national and international regulations, standards and guidelines (such as, for example, the EU Machinery Directive, the regulations of the trade association and of TÜV or VDE).
- The valves/pumps and all the other installed components are in a technically fault-free and operationally reliable state.
- No signals which can lead to uncontrolled movements in the machine are transmitted to the valves/pumps.

Intended operation also includes the following:

- Observation of all the product-related user information relevant to the particular application
⇒ [Chapter "1.1.2 Completeness", page 2](#)
- Handling of the valves/pumps in accordance with safety requirements
⇒ [Chapter "2.1 Handling in accordance with safety requirements", page 7](#)
- Adherence to all the inspection and maintenance instructions of the manufacturer and the operator of the machine
- Observation of all safety standards of the manufacturer and the operator of the machine relevant to the particular application
- Observation of all the latest versions of the national and international regulations, standards and guidelines relevant to the particular application (such as, for example, the EU Machinery Directive, the regulations of the trade association and of TÜV or VDE)

1.3 Selection and qualification of personnel

WARNING

Only properly qualified and authorized users may work with and on the valves/pumps.

Selection and qualification of personnel

Qualified users are specialized personnel with the required knowledge and experience who have been trained to carry out such work. The specialized personnel must be able to recognize and avert the dangers to which they are exposed when working with and on the valves/pumps.

In particular, these specialized personnel must be authorized to operate, earth/ground and mark hydraulic and electrical devices, systems and power circuits in accordance with the standards of safety engineering. Project planners must be fully conversant with the safety concepts of automation engineering.

Warranty and liability claims in the event of personal injury or damage to property are among others excluded if such injury or damage is caused when the valves/pumps are worked on or handled by non-qualified personnel.

Qualified users

1.4 Trademarks

Moog and Moog Authentic Repair® are registered trademarks of Moog Inc. and its subsidiaries.

EtherCAT® is registered trademark and patented technology licensed by Beckhoff Automation GmbH, Germany.

Trademarks

- ❗ All the product and company names mentioned in this document are possibly proprietary names or trademarks of the respective manufacturers. The use of these names by third parties for their own purposes may infringe the rights of the manufacturers.
It cannot be inferred from the absence of the ® or ™ symbol that the designation is a free brand name.

For your notes.

2 Safety

The safety instructions set out in the product-specific valve/pump user information must be observed. These are in particular:

- Handling in accordance with safety requirements
- Occupational safety and health
- General safety instructions
- Safety instructions for installation and maintenance

2.1 Handling in accordance with safety requirements

WARNING



It is the responsibility of the manufacturer and the operator of the machine to ensure that the valves/pumps are handled in accordance with safety requirements.

WARNING



As in any electronic control system, the failure of certain components in valves/pumps as well can give rise to an uncontrolled and/or unforeseeable operational sequence. All types of failure on a system level must be taken into consideration and appropriate protective measures taken.

The use of automatic control technology in a machine calls for special measures.

If automatic control technology is to be used, the user should, in addition to all the potentially available standards or guidelines on safety-engineering installations, consult the manufacturers of the components used in great depth.

In order to ensure that the valves/pumps are handled in accordance with safety requirements and operated without faults, it is essential to observe the following:

- All the safety instructions in the user information
⇒ [Chapter "1.1.2 Completeness", page 2](#)
- All the safety instructions in the safety standards of the manufacturer and the operator of the machine relevant to the particular application
- All the relevant national and international safety and accident prevention regulations, standards and guidelines, such as for example the safety regulations of the trade association, of TÜV or VDE, in particular the following standards pertaining to the safety of machinery:
 - [DIN EN ISO 12100](#)
 - [DIN EN 982](#)
 - [DIN EN 60204](#)
 - [DIN EN 954-1](#)

Handling in accordance with safety requirements

Observing the safety instructions and the safety and accident prevention regulations, standards and guidelines will help to prevent accidents, malfunctions and damage to property!

2.2 Occupational safety and health

CAUTION

Falling objects, such as e.g. valve/pump, tool or accessory, can cause injury.

Suitable safety equipment, such as e.g. safety shoes, must be worn to provide protection against injury.

Occupational safety and health measures and equipment**CAUTION**

Valves/pumps and hydraulic port lines can become very hot during operation.

To protect yourself against injury, wear suitable safety equipment, such as work gloves, before touching valves/pumps or the port lines during such operations as mounting, removal, electrical and hydraulic connection, trouble shooting or servicing.

CAUTION

Depending on the application, significant levels of noise may be generated when the valves/pumps are operated.

If necessary, the manufacturer and operator of the machine must take appropriate soundproofing measures or stipulate that suitable safety equipment, e.g., ear defenders, be worn.

CAUTION

When handling hydraulic fluids, observe the safety provisions applicable to the hydraulic fluid used.

If necessary, suitable safety equipment, such as e.g. safety shoes, must be worn to provide protection against injury.

2.3 General safety instructions

WARNING

Only properly qualified and authorized users may work with and on the valves/pumps.

⇒ Chapter "1.3 Selection and qualification of personnel", page 5

General safety instructions**WARNING**

Observe and adhere to the technical data and in particular the information given on the valve/pump nameplate.

CAUTION

All the product-related user information relevant to the particular application must be inserted in the machine operating instructions.

2.4 ESD

WARNING



Electrical discharges can damage internal device components.

ESD

Protect the valve/pump, accessories and spare parts against static charging.

In particular, avoid touching the connector contacts.

2.5 Safety instructions for installation and maintenance

WARNING



When starting up valves/pumps on the field bus for the first time, we recommend that the component be operated in a depressurized state.

Depressurized state
during initial starting-up

WARNING



Before connecting valves/pumps to the field bus, it is essential to complete the electrical and if necessary hydraulic connection of the component properly as described in the user information.

⇒ Chapter "4 Electrical Interfaces", page 19

⇒ Chapter "1.1.2 Completeness", page 2

WARNING



The protective conductor connection ($\oplus$), if provided, is connected to the electronics housing or valve/pump body. The insulating elements used are designed for the safety extra low voltage range.

The circuits of the field bus connections, if provided, are only functionally isolated from other connected circuits.

Compliance with the safety regulations requires that the equipment be isolated from the mains system in accordance with [DIN EN 61558-1](#) and [DIN EN 61558-2-6](#) and that all voltages be limited in accordance with [DIN EN 60204-1](#).

We recommend the use of SELV/PELV power packs.

Isolation from
the mains system

CAUTION



Unsuitable or defective accessories or unsuitable or defective spare parts may cause damage, malfunctions or failure of the valve/pump or the machine.

We recommend that original accessories and original spare parts be used.

Warranty and liability claims for personal injury and damage to property are among other things excluded if they are caused by the use of unsuitable or defective accessories or unsuitable or defective spare parts.

Original accessories

CAUTION

Dirt or moisture can get into the valve/pump electronics through unplugged connectors, i.e., if a mating connector is not inserted, which may result in the valve or the pump being damaged.

Unplugged connectors must be covered and sealed.

The plastic dust protection caps which are attached to service connectors X5, X6, X7 and X10 on delivery are suitable for use as sealing covers.

The plastic dust protection caps which are attached to field bus connectors X3 and X4 on delivery are not suitable for use as sealing covers.

Suitable metallic dust protection caps for field bus connectors X3 and X4 are available as accessories.

⇒ Chapter "9.2 Accessories", page 84

Cover unplugged connectors with dust protection caps

CAUTION

Do not lay valve/pump connection cables in the immediate vicinity of high-voltage cables or together with cables that switch inductive or capacitive loads.

Laying connection cables

CAUTION

For the floating analog inputs of connector X1, the potential difference (measured to supply zero) must be between -15 V and 32 V.

CAUTION

The input current of the analog inputs with current input signal must be between -25 mA and 25 mA!

Voltage levels in excess of 5 V can cause the destruction of the integrated valve/pump electronics at analog inputs on connector X1.

CAUTION

In the signal range 4–20 mA input currents < 3 mA (e.g., due to a faulty electric cable) indicate a fault.

2.5.1 Protective grounding and electrical shielding

WARNING

The equipotential bonding and protective conductor system for a machine in which the valves/pumps are to be used must be designed in accordance with [DIN EN 60204-1](#).

Equipotential bonding / protective conductor system

WARNING

This protective conductor is not a replacement for the normal equipotential bonding system.

⇒ Chapter "6.2.2.1 General principles", page 50

The protective conductor must not be used for equipotential bonding.

WARNING

Good equipotential bonding is often not provided for in many industrial applications. An effective equipotential bonding system must be set up in compliance with [DIN EN 60204-1](#), Section 8, here.

If this is not possible, the machine will not comply with [DIN EN 60204-1](#)!

Extreme caution must be exercised here as very high currents can pass through the protective conductor connection of the valve/pump.

2.5.2 Moog Valve Configuration Software

WARNING

For safety reasons, the Moog Valve Configuration Software must not be used inside a machine for visualization purposes or as an operator terminal.

WARNING

It is only permitted to activate valves/pumps via the Moog Valve Configuration Software if this does not cause any dangerous states in the machine and in its surroundings. It is not permitted to operate the Moog Valve Configuration Software on a field bus while the machine is running.

CAUTION

Activating valves/pumps via the Moog Valve Configuration Software within a network can give rise to unforeseeable events if field bus communication takes place simultaneously between the machine controller or to other bus nodes!

Safety instructions on using the Moog Valve Configuration Software

CAUTION

Messages from the Moog Valve Configuration Software can also be received by other bus nodes. This may trigger off unforeseeable events!

CAUTION

If completely safe operation of the valves/pumps via the Moog Valve Configuration Software cannot be guaranteed even with deactivated field bus communication with the machine controller and other bus nodes, the valves/pumps are only permitted to communicate in a depressurized state and in a direct link (point-to-point) with the Moog Valve Configuration Software.

CAUTION

Data communication between the valve/pump electronics and the Moog Valve Configuration Software may be disrupted if other field bus nodes (e.g., a controller) are accessing the valve/pump electronics at the same time.

For your notes.

3 Function and Method of Operation

3.1 Block diagram

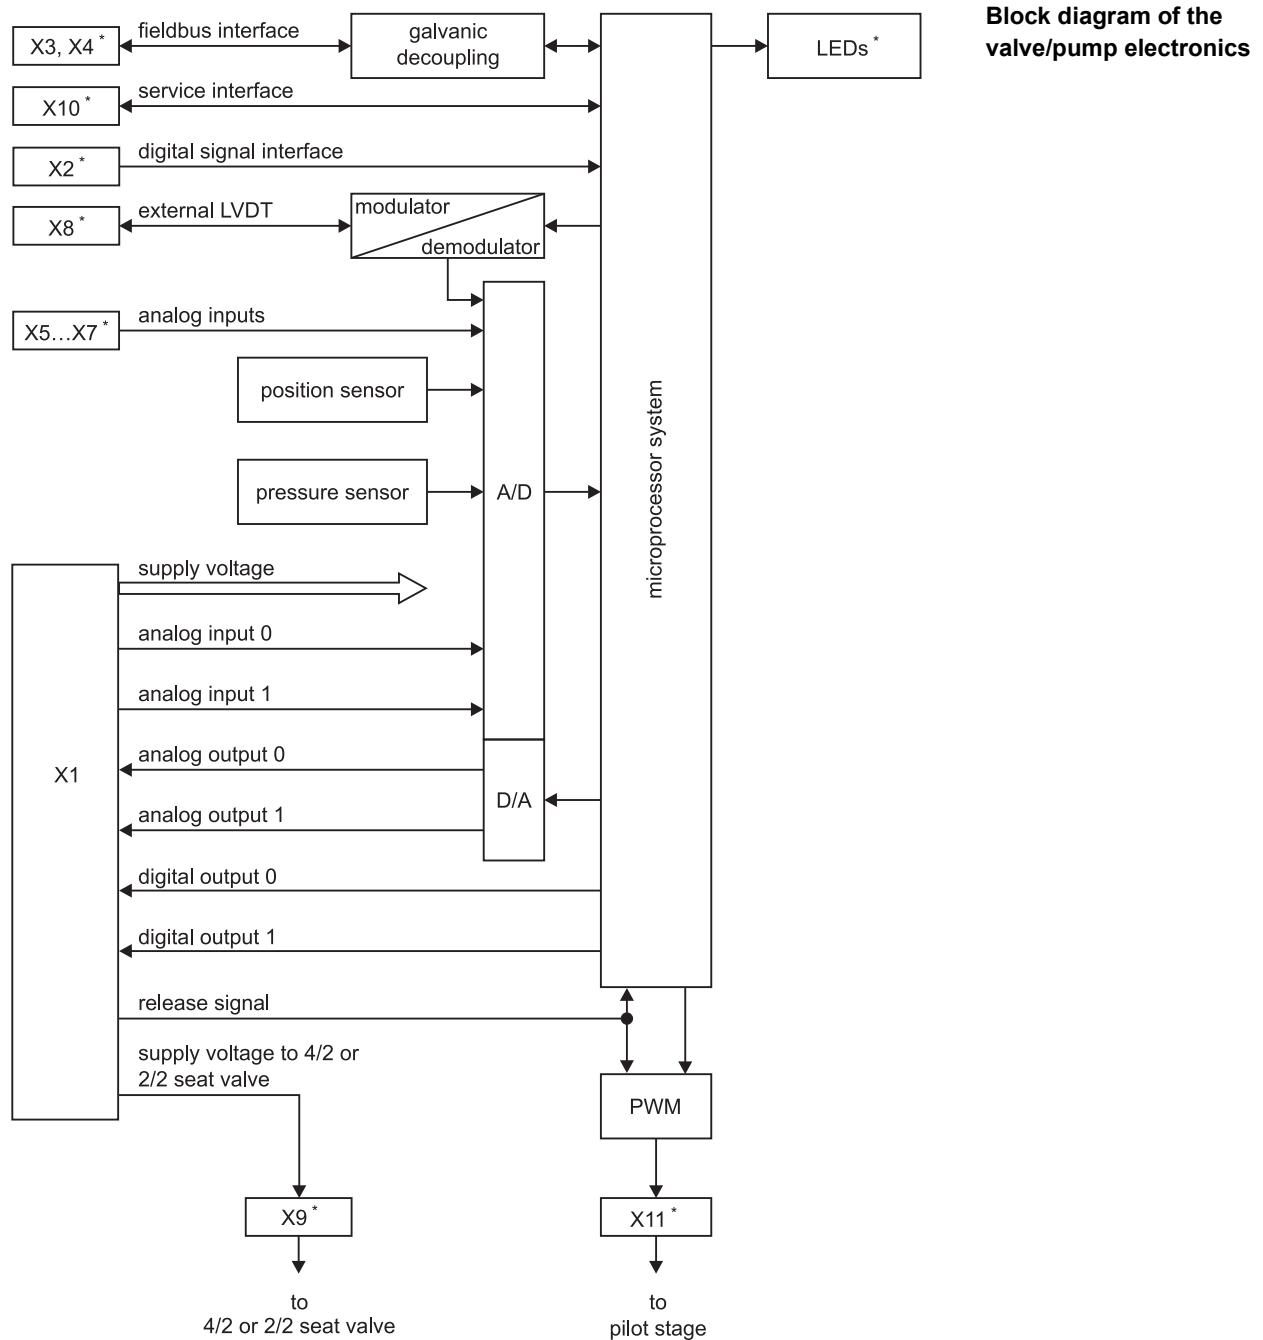


Figure 1: Block diagram of the valve/pump electronics

* Depending on the model, the valves/pumps can have different electrical connections and light emitting diodes.

Allocation of interfaces to connectors

The valve/pump electronics are equipped with connectors which are designated X1 through X11.

The table below shows which interfaces are accommodated in the different connectors.

Interface type	Interface	Connector
Analog input	Analog input 0	X1
	Analog input 1	X1
	Analog input 2	X5
	Analog input 3	X6
	Analog input 4	X7
Analog output	Analog output 0	X1
	Analog output 1	X1
Digital input	Release signal	X1
Digital output	Digital output 0	X1
	Digital output 1	X1
Digital signal interface	SSI transducers, incremental transducers, LocalCAN transducers	X2
Field bus interface	CANopen, Profibus-DP, EtherCAT®	X3, X4
External LVDT	Not for customer use	X8
Supply to the 4/2- or 2/2-way seat valve	Not for customer use	X9
Service interface		X10
Pilot valve interface	Not for customer use	X11

Table 1: Allocation of interfaces to connectors

Allocation of interfaces to connectors

 Information on the position of the connectors on the housing can be found in the product-specific valve/pump user information.

3.2 Analog inputs/outputs

The analog inputs/outputs are available on connector X1 and optionally on connectors X5, X6 and X7. The analog inputs can measure both current and voltage.

Specific technical data:

⇒ [Chapter "4.1.5 Analog inputs", page 23](#)

⇒ [Chapter "4.1.6 Analog outputs", page 25](#)

⇒ [Chapter "4.4 Analog input connectors X5, X6 and X7", page 35](#)

Analog inputs/outputs

3.3 Digital inputs/outputs

The digital inputs/outputs are available on connector X1. The digital input serves as the release signal. The digital output indicates specific events, such as for example the occurrence of a fault.

⇒ [Chapter "4.1.7 Digital inputs", page 25](#)

⇒ [Chapter "4.1.8 Digital outputs", page 25](#)

Digital inputs/outputs

3.4 Digital signal interface

The digital signal interface is available on connector X2. This interface is for SSI transducers, incremental transducers and LocalCAN transducers

⇒ [Chapter "4.2 Connector X2 for digital signal interface", page 26](#)

Digital signal interface

3.5 Field bus interfaces

Modern automation technology is characterized by an increasing decentralization of processing functions via serial data communication systems. The use of serial bus systems in place of conventional connection technologies guarantees greater system flexibility with regard to alterations and expansions and additionally opens up considerable potential for saving project planning and installation costs in many areas of industrial automation. Further possibilities of parameterization, better diagnostic options and a reduction of the variety of variants are advantages which have only been made possible by the use of field buses.

Valves/pumps with field bus interfaces are activated, monitored and configured via the field bus interface (connectors X3 and X4).

To reduce the amount of wiring, the field bus interface is provided with two connectors. The valve/pump electronics can thus be directly looped into the field bus, i.e., without the use of external T-pieces.

The following field bus interfaces are possible:

- CANopen, CAN
- Profibus-DP V1
- EtherCAT®

⇒ Chapter "4.3 Field bus connectors X3 and X4", page 31

General information on field bus interfaces

Available field bus interfaces

3.5.1 CAN bus interface

The CAN bus is a differential 2-wire bus and was developed to facilitate rapid and interference-free networking of components. CANopen is based on the CAN bus and is a standardized communications profile, which allows communication between CANopen-compatible devices of all kinds of manufacturers. Thanks to its flexibility and high reliability, the CAN bus is suitable for diverse applications.

CAN bus interface

The CAN bus has the following features:

- Multi-master system: Each node can transmit and receive
- Topology: Line structure with short stub cables
- Network expansion and transmission rates:
25 m (27.340 yd) at 1 Mbit/s to 5,000 m (5,468 yd) at 25 kbit/s
- Addressing type: Message-orientated via identifiers
Priority assignment of messages possible via identifiers
- Safety: Hamming distance = 6, i.e., up to 5 individual errors per message are detected
- Bus physics: [ISO/DIS 11898](#)
- Max. number of nodes: 127 (via repeaters)

⇒ Chapter "4.3.1 CAN connectors", page 31

⇒ Chapter "6.7 Wiring CAN networks (X2, X3, X4)", page 64

3.5.2 Profibus-DP interface

The Profibus-DP is a differential 2-wire bus and was developed to facilitate rapid and simple networking of components. Profibus-DP has gained acceptance as a widely used standard.

Profibus-DP interface

The Profibus-DP has the following features:

- Standardized in accordance with [DIN EN 61158-2](#) (type 3)
- Multi-master system:
Masters share access time and initiate communication.
Slaves react only on request.
- Topology: Line structure with short stub cables
- Network expansion and transmission rates:
100 m (109.361 yd) at 12 Mbit/s to 1,200 m (1,312 yd) at 9.6 kbit/s per segment
Use of repeaters possible
- Addressing type: Address-orientated
Priority/cycle time assignment of messages via master configuration
- Bus physics: RS 485 in accordance with [TIA/EIA-485-A](#)
- Max. number of nodes: 127

⇒ Chapter "4.3.2 Profibus-DP connectors", page 32

⇒ Chapter "6.8 Wiring Profibus-DP networks (X3, X4)", page 68

3.5.3 EtherCAT® interface

The EtherCAT® bus was developed to facilitate networking of components with very short cycle times and high real time requirements.

EtherCAT® interface

EtherCAT® is based on Ethernet technology and is suitable for applications in machines.

The EtherCAT® bus has the following features:

- Standardized in accordance with [IEC 62407](#)
- Single-master system:
The master initiates communication.
Slaves react only on request.
- Topology:
Line, star, tree and ring structure based on the daisy chain principle
- Network expansion and transmission rates:
100 m (109.361 yd) between two nodes at 100 Mbit/s
- Addressing type: Address-orientated, one telegram for all nodes
- Bus physics: Fast Ethernet
- Max. number of nodes: 65,535

⇒ Chapter "4.3.3 EtherCAT® connectors", page 33

⇒ Chapter "6.9 Wiring EtherCAT® networks (X3, X4)", page 71

3.6 External LVDT

The external LVDT is available on connector X8. This interface is used for 2nd stage position feedback.

External LVDT

⇒ [Chapter "4.5 Connector X8 for external LVDT", page 38](#)

CAUTION This connection is not intended for customer use.



3.7 Service interface

This interface serves to connect diagnostic and starting-up tools and is available on connector X10.

Service interface

⇒ [Chapter "4.7 Service connector X10", page 39](#)

3.8 Pilot valve interface

The connection to the pilot valve is established with connector X11.

Pilot valve interface

CAUTION This connection is not intended for customer use.



3.9 Status LEDs

The electronics housing can feature as an option multi-colored light emitting diodes (status LEDs) for indicating the operating state of the valves/pumps and the network state.

Status LEDs

⇒ [Chapter "5 Status display", page 41](#)

For your notes.

4 Electrical Interfaces


4.1 Connector X1

Connector X1 is designed in accordance with [DIN EN 175201-804](#) and is available in the following versions:

- 6+PE-pin connector with protective conductor contact
⇒ [Chapter "4.1.1.1 Pin assignment of 6+PE-pin connector", page 19](#)
- 11+PE-pin connector with protective conductor contact (variant Q)
⇒ [Chapter "4.1.1.2 Pin assignment, 11+PE-pin connector \(variant Q\)", page 20](#)
- 11+PE-pin connector with protective conductor contact (variant p/Q, pump)
⇒ [Chapter "4.1.1.3 Pin assignment, 11+PE-pin connector \(variant p/Q, pump\)", page 21](#)

4.1.1 Pin assignment of connector X1

4.1.1.1 Pin assignment of 6+PE-pin connector

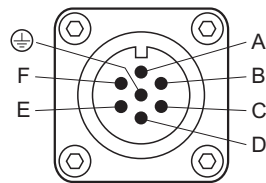

View of connector X1
(external thread, pin contacts)


6+PE-pin connector X1

Pin	Assignment	Description
A	Supply voltage	Nominal 24 V (18–32 V) DC based on GND
B	GND	Supply zero or signal zero
C	Release signal	Enable referred to GND
D	Analog input 0	Current or voltage input referred to pin E
E	Reference point for analog input 0	Reference point for pin D
F	Analog output 0	4–20 mA or 2–10 V referred to GND
PE ⊕	Protective conductor contact	Leading contact; connect protective grounding: ⇒ Chapter "6.2 Protective grounding and electrical shielding", page 48

Figure 2: 6+PE-pin connector X1

⇒ [Chapter "6.4 Wiring connector X1", page 59](#)

4.1.1.2 Pin assignment, 11+PE-pin connector (variant Q)

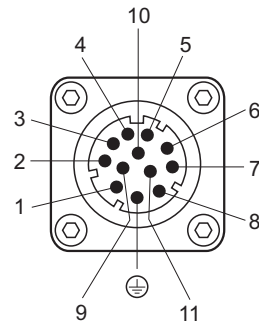

View of connector X1
(external thread, pin contacts)


11+PE-pin connector X1
(variant Q)

Pin	Assignment	Description
1	Optional	Supply to the 4/2- or 2/2-way seat valve (for fail-safe valves only): Nominal 24 V (22.8–26.4 V) DC, max. 1.2 A
2	Optional	Supply to the 4/2- or 2/2-way seat valve (for fail-safe valves only): 0 V
3	Release signal	Enable referred to GND
4	Analog input 0	Current or voltage input referred to pin 5
5	Reference point for analog input 0	Reference point for pin 4
6	Analog output 0	4–20 mA or 2–10 V referred to GND
7		Not assigned
8	Digital output 0	High: valve ready
9	Supply voltage	Nominal 24 V (18–32 V) DC based on GND
10	GND	Supply zero or signal zero
11	Digital output 1	Monitoring (negative logic)
PE ⊕	Protective conductor contact	Leading contact; connect protective grounding: ⇒ Chapter "6.2 Protective grounding and electrical shielding", page 48

Figure 3: 11+PE-pin connector X1 (variant Q)

⇒ [Chapter "6.4 Wiring connector X1", page 59](#)

4.1.1.3 Pin assignment, 11+PE-pin connector (variant p/Q, pump)



View of connector X1
(external thread, pin contacts)

**11+PE-pin connector X1
(variant p/Q, pump)**

Pin	Assignment	Description
1	Optional	Supply to the 4/2- or 2/2-way seat valve (for fail-safe valves only): Nominal 24 V (22.8–26.4 V) DC, max. 1.2 A
2	Optional	Supply to the 4/2- or 2/2-way seat valve (for fail-safe valves only): 0 V
3	Release signal	Enable referred to GND
4	Analog input 0	Current or voltage input referred to pin 5
5	Reference point for analog input 0 and input 1	Reference point for pin 4 and pin 7
6	Analog output 0	4–20 mA or 2–10 V referred to GND
7	Analog input 1	Current or voltage input referred to pin 5
8	Analog output 1	4–20 mA or 2–10 V referred to GND
9	Supply voltage	Nominal 24 V (18–32 V) DC based on GND
10	GND	Supply zero or signal zero
11	Digital output 1	Monitoring (negative logic)
PE ⊕	Protective conductor contact	Leading contact; connect protective grounding: ⇒ Chapter "6.2 Protective grounding and electrical shielding", page 48

Figure 4: 11+PE-pin connector X1 (variant p/Q, pump)

⇒ Chapter "6.4 Wiring connector X1", page 59

4.1.2 Mating connector for connector X1

The mating connector for the 6+PE- and 11+PE-pin connector X1 is available as an accessory.

⇒ Chapter "9.2 Accessories", page 84

⇒ Chapter "6.3 Permissible lengths for connection cables", page 54

**Mating connector for
connector X1**

4.1.3 Power supply

WARNING



The protective conductor connection (⊕), if provided, is connected to the electronics housing or valve/pump body. The insulating elements used are designed for the safety extra low voltage range.

The circuits of the field bus connections, if provided, are only functionally isolated from other connected circuits.

Compliance with the safety regulations requires that the equipment be isolated from the mains system in accordance with [DIN EN 61558-1](#) and [DIN EN 61558-2-6](#) and that all voltages be limited in accordance with [DIN EN 60204-1](#).

We recommend the use of SELV/PELV power packs.

Isolation from the mains system

CAUTION



Electrical connection must be conducted in compliance with EMC requirements.

The supply voltage must be nominally 24 V (18–32 V) DC referred to supply zero. Supply voltages of less than 18 V are detected by the valve/pump electronics as undervoltage.

Requirement of supply voltage

The valve/pump electronics are protected against polarity reversal of the connections.

The nominal power consumption of the valves/pumps varies from model to model. The power consumption varies with the operating conditions.

-  Detailed information can be found in the product-specific valve/pump user information.

4.1.4 Supply to the 4/2- or 2/2-way seat valve

CAUTION



We recommend that an EMC-compliant SELV/PELV power pack in accordance with [DIN EN 60204-1](#) be used to power the 4/2- or 2/2-way seat valve. Electrical connection must be conducted in compliance with EMC requirements.

Supply to the 4/2- or 2/2-way seat valve

4/2- or 2/2-way seat valves are additional safety valves. They are powered via connector X9.

⇒ [Figure 1, page 13](#)

⇒ [Chapter "4.6 Plug connection X9 for 4/2- or 2/2-way seat valve", page 38](#)

-  Please refer to the product-specific valve/pump user information for detailed information on using a 4/2- or 2/2-way seat valve.

Description		Values	Additions
Nominal voltage		24 V	Direct voltage (22.8–26.4 V)
Nominal power	2/2-way seat valve	26 W	
	4/2-way seat valve	36 W	

Table 2: Nominal voltage/nominal power of the 4/2- or 2/2-way seat valve

4.1.5 Analog inputs

All current and voltage inputs are differential, but can be connected to ground (single-ended) by means of external wiring. The analog inputs of connector X1 have a resolution of 12 bits.

⇒ Chapter "6.4.1 Single-ended command signals", page 60

4.1.5.1 Signal types

The analog inputs are available in the following versions:

- ± 10 V
- 0–10 V
- ± 10 mA
- 0–10 mA
- 4–20 mA

Signal types of the analog inputs on connector X1

Which signal type is set for the analog inputs on delivery is dependent on the valve/pump model. The signal types can be configured via the firmware.

 Detailed information can be found in the "Firmware" User Manual.

Signal type for the analog input: ± 10 V

In the case of this signal type, the input is configured as a differential voltage input with a ± 10 V input range.

Analog input: ± 10 V

The differential input resistance is 20 k Ω .

The input resistance referred to supply zero is approx. 150 k Ω .

The potential difference of each input to supply zero must be between -15 V and 32 V.

If there is no differential analog source available, the reference point of the analog input (pin 5) must be connected to 0 V of the analog source.

Signal type for the analog input: 0–10 V

In the case of this signal type, the input is configured as a differential voltage input with a 0–10 V input range.

Analog input: 0–10 V

The differential input resistance is 20 k Ω .

The input resistance referred to supply zero is approx. 150 k Ω .

The potential difference of each input to supply zero must be between -15 V and 32 V.

If there is no differential analog source available, the reference point of the analog input (pin 5) must be connected to 0 V of the analog source.

Signal type for the analog input: ± 10 mA

With this signal type, the input current to be measured is directed via the two input pins to an internal shunt.

Analog input: ± 10 mA

The differential input resistance is 200 Ω .

The input resistance referred to supply zero is approx. 150 k Ω .

CAUTION



The input current must be between -25 mA and 25 mA! Input currents outside this permissible range will destroy the input.

The potential difference of each input to supply zero must be between -15 V and 32 V.

If there is no floating analog source available, the reference point of the analog input (pin 5) must be connected to 0 V of the analog source.

Signal type for the analog input: 0–10 mA

With this signal type, the input current to be measured is directed via the two input pins to an internal shunt.

Analog input: 0–10 mA

The differential input resistance is 200 Ω .

The input resistance referred to supply zero is approx. 150 k Ω .

CAUTION



The input current must be between -25 mA and 25 mA! Input currents outside this permissible range will destroy the input.

The potential difference of each input to supply zero must be between -15 V and 32 V.

If there is no floating analog source available, the reference point of the analog input (pin 5) must be connected to 0 V of the analog source.

Signal type for the analog input: 4–20 mA

With this signal type, the input current to be measured is directed via the two input pins to an internal shunt.

Analog input: 4–20 mA

The differential input resistance is 200 Ω .

The input resistance referred to supply zero is approx. 150 k Ω .

CAUTION



The input current must be between -25 mA and 25 mA! Input currents outside this permissible range will destroy the input.

The potential difference of each input to supply zero must be between -15 V and 32 V.

If there is no floating analog source available, the reference point of the analog input (pin 5) must be connected to 0 V of the analog source.

In the 4–20 mA signal range signals of $I_{in} < 3$ mA (e.g., due to a defective electric cable) signify a fault, which can be evaluated by the valve software.

4.1.6 Analog outputs

4.1.6.1 Analog outputs 4–20 mA

The reference point for the 4–20 mA analog outputs is supply zero.

Analog output: 4–20 mA

The load impedance must be in the range of 0–500 Ω .

Cable break detection of the connected cable can be effected with the 4–20 mA analog outputs.

The 4–20 mA analog outputs are short-circuit protected.

4.1.6.2 Analog outputs 2–10 V

The reference point for the 2–10 V analog outputs is supply zero.

Analog output: 2–10 V

The internal resistance is 500 Ω .

Cable break detection of the connected cable can be effected with the 2–10 V analog outputs.

Voltage drops in the supply cable to the valve/pump electronics can result in deviations from the actual value.

⇒ Chapter "6.4.1 Single-ended command signals", page 60

Recommendation: Use a 4–20 mA analog output and terminate directly at the measurement input with 500 Ω .

⇒ Chapter "6.4.2 Conversion of actual value output signals I_{out} ", page 61

4.1.7 Digital inputs

4.1.7.1 Release signal input

Signals between 8.5 V and 32 V supply voltage referred to supply zero at the release signal input allow the valve to go active.

Release signal input

Signals of less than 6.5 V at the release signal input are identified as enable not issued. The electrical output stage is deactivated if no release signal input. This input is also used to acknowledge a valve/pump fault state via an analog signal.

The input current of the release signal input is 2.3 mA when connected to 24 V.

 Please refer to the Firmware user information and the product-specific valve/pump user information for further details.

4.1.8 Digital outputs

The digital outputs are short-circuit protected and switch off in the event of overload. After a period of cooling down, the digital output switches itself back on. Overload means a current load in excess of 1.5 A.

Valve ready and monitoring

High Supply voltage connected.

Low Supply voltage disconnected (10 k Ω to supply zero).

Logic level


4.2 Connector X2 for digital signal interface

Digital transducers such as incremental, SSI or CAN transducers can be connected to the digital signal interface.

Connector X2 is available in the following versions:

- 8-pin M12 incremental transducer connector X2
⇒ Chapter "4.2.1 Incremental transducer", page 26
- 8-pin M12 SSI connector X2
⇒ Chapter "4.2.2 SSI transducer", page 28
- 5-pin M12 LocalCAN connector X2
⇒ Chapter "4.2.3.1 Pin assignment, LocalCAN connector X2 (M12, 5-pin)", page 30
- 3-pin M8 LocalCAN connector X2
⇒ Chapter "4.2.3.2 Pin assignment, LocalCAN connector X2 (M8, 3-pin)", page 31

4.2.1 Incremental transducer

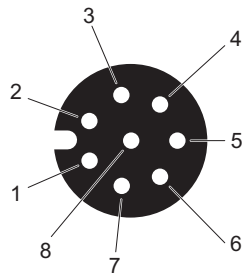

View of incremental transducer
connector X2
(internal thread, socket connectors)

Incremental transducer
connector X2 (M12, 8-pin)

Pin	Assignment	Description
1	Z+	Zero pulse
2	Z-	Zero pulse inverted
3	A+	Counting pulses
4	A-	Counting pulses inverted
5	B+	Counting pulses by 90° out of phase
6	B-	Counting pulses by 90° out of phase, inverted
7	Sensor supply	Supply voltage to incremental transducer 24 V / 5 V / 0 V (configurable; see "Firmware" User Manual) $I_{\max} (X2+X5+X6+X7) = 300 \text{ mA}$
8	Supply zero	

Figure 5: Incremental transducer connector X2 (M12, 8-pin)

This digital signal interface is suitable in accordance with [TIA/EIA 422 \(formerly RS 422\)](#) for connecting e.g., position transducers or rotary transducers with incremental transducer signals.

⇒ Chapter "6.5 Wiring incremental transducers (X2)", page 62

The following transducer types are supported:

- Standard with negative logic
- Standard with positive logic
- Pulse train with negative logic
- Pulse train with positive logic
- Frequency modulation with positive logic
- Frequency modulation with negative logic

Supported transducer types

The digital signal interface must be configured.

 Detailed information can be found in the "Firmware" User Manual.

The signal levels conform to the standard [TIA/EIA 422 \(formerly RS 422\)](#).

Recommended cable types

Use exclusively shielded cables with copper braiding shielding with min. 80 % overlap.

Copper conductors with a cross section of at least 0.25 mm² (AWG 24 or lower).

Use cables with twisted-pair conductors in environments with high background noise levels.

Recommended cable types for incremental transducer

Cable break monitoring

Inputs A, B and Z of the digital signal interfaces are monitored for cable break – irrespective of which transducer type is connected.

The status of cable break monitoring can be read out via field bus. The reaction to a cable break is configurable.

Cable break monitoring

 Detailed information can be found in the "Firmware" User Manual.

Power supply to the transducer

Power is supplied to the transducer via pin 7 on connector X2.

⇒ [Figure 6, page 28](#)

Power supply to the transducer

 There is joint fusing of this power supply for X2, X5, X6 and X7. The total supply current must therefore not exceed the following value:


$$I_{\max} (X2+X5+X6+X7) = 300 \text{ mA}$$

The 24 V or 5 V supply voltage is configurable (see "Firmware" User Manual).

An external power supply to the transducer is also possible. However, the 0 V transducer supply must be connected to supply zero.

The supply voltage is cut off in the event of a possible short circuit in the supply voltage to the transducer. A fault reaction can be configured (see "Firmware" User Manual). The voltage is available again as soon as the short circuit has been eliminated.

4.2.2 SSI transducer

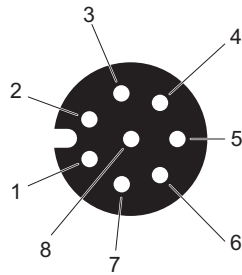

View of SSI transducer connector X2
(internal thread, socket connectors)

**SSI transducer
connector X2 (M12, 8-pin)**

Pin	Assignment	Description
1	CLK+	Clock pulse output
2	CLK-	
3	DATA+	Data input for transducer data
4	DATA-	
5	Not assigned	
6	Not assigned	
7	Sensor supply	Supply voltage to SSI transducer 24 V / 5 V / 0 V (configurable; see "Firmware" User Manual) $I_{\max} = 300 \text{ mA}$
8	Supply zero	

Figure 6: SSI transducer connector X2 (M12, 8-pin)

This digital signal interface is suitable in accordance with [TIA/EIA 422 \(formerly RS 422\)](#) for connecting e.g., position transducers or rotary transducers with an SSI interface.

⇒ [Chapter "6.6 Wiring SSI transducers \(X2\)", page 63](#)

The following transducer types are supported:

- Coded with binary code
- Coded with Gray Code

**Supported types of
SSI transducers**

The digital signal interface must be configured.

 Detailed information can be found in the "Firmware" User Manual.

The signal levels conform to the standard [TIA/EIA 422 \(formerly RS 422\)](#).

Recommended cable types

Use exclusively shielded cables with copper braiding shielding with min. 80 % overlap.

Copper conductors with a cross section of at least 0.25 mm^2 (AWG 24 or lower).

Use cables with twisted-pair conductors in environments with high background noise levels.

**Recommended cable
types for SSI transducer**

Cable break monitoring

Inputs CLK and DATA of the digital signal interfaces are monitored for cable break – irrespective of which transducer type is connected.

The status of cable break monitoring can be read out via field bus. The reaction to a cable break is configurable.

 Detailed information can be found in the "Firmware" User Manual.

Cable break monitoring

Power supply to the transducer

Power is supplied to the transducer via pin 7 on connector X2.

⇒ [Figure 6, page 28](#)

 There is joint fusing of this power supply for X2, X5, X6 and X7. The total supply current must therefore not exceed the following value:

$$I_{\max} (X2+X5+X6+X7) = 300 \text{ mA}$$

Power supply to the transducer

The 24 V or 5 V supply voltage is configurable (see "Firmware" User Manual). An external power supply to the transducer is also possible. However, the 0 V transducer supply must be connected to supply zero.

The supply voltage is cut off in the event of a possible short circuit in the supply voltage to the transducer. A fault reaction can be configured (see "Firmware" User Manual). The voltage is available again as soon as the short circuit has been eliminated.

4.2.3 LocalCAN

The local CAN interface enables transducers, actuators and further valves/pumps to be networked. The interface is not electrically isolated; short cables and equipotential bonding must therefore be provided.

EMC protection requirements	Immunity to interference as per DIN EN 61000-6-2 (evaluation criterion A) Emitted interference as per DIN EN 61000-6-4
Physical	ISO/DIS 11898 CAN-HIGH SPEED
Maximum voltage capacity	±40 V long-term (between CAN_H and CAN_L) ±2.5 kV ESD (classification A: Human Body Model, C = 100 pF, R = 1.5 kΩ)
Maximum permissible number of CAN bus nodes	32 or 110 ⇒ Chapter "6.7.2 Permissible number of CAN bus nodes", page 67


Technical data for the LocalCAN interface

Table 3: Technical data for the LocalCAN interface

To connect the valves/pumps to a CAN network, we recommend molded cord sets with an integral straight mating connector.

⇒ [Chapter "6.7 Wiring CAN networks \(X2, X3, X4\)", page 64](#)

4.2.3.1 Pin assignment, LocalCAN connector X2 (M12, 5-pin)



**LocalCAN connector X2
(M12, 5-pin)**

View of LocalCAN connector X2
(internal thread, socket connectors)

Pin	Assignment	Description
1	CAN_SHLD	Shield (fitted on control cabinet side)
2	CAN_V+	Transducer supply +24 V; $I_{\max} = 300 \text{ mA}$
3	CAN_GND	Ground connected to supply zero
4	CAN_H	Transceiver H
5	CAN_L	Transceiver L

Figure 7: LocalCAN connector X2 (M12, 5-pin)

CAUTION



To prevent the connector from being damaged, pay attention to the alignment of the key.

Transducers can be supplied directly by the applied supply voltage.

Power supply to the transducer

Power is supplied to the transducer via pin 2 on connector X2.


⇒ [Figure 7, page 30](#)

An external power supply to the transducer is also possible. However, the 0 V transducer supply must be connected to supply zero.

The supply voltage is cut off in the event of a possible short circuit in the supply voltage to the transducer. The voltage is available again as soon as the short circuit has been eliminated.

**Power supply to
the transducer at
LocalCAN connector X2**

4.2.3.2 Pin assignment, LocalCAN connector X2 (M8, 3-pin)



View of LocalCAN connector X2
(external thread, pin contacts)

**LocalCAN connector X2
(M8, 3-pin)**

Pin	Assignment	Description
1	CAN_H	Transceiver H
3	CAN_GND	Not assigned
4	CAN_L	Transceiver L

Figure 8: LocalCAN connector X2 (M8, 3-pin)

i No transducers can be supplied via this connector.

4.3 Field bus connectors X3 and X4

Field bus connectors X3 and X4 are available in the following versions:

- 5-pin CAN connector
⇒ [Chapter "4.3.1 CAN connectors", page 31](#)
- 5-pin Profibus-DP connector
⇒ [Chapter "4.3.2 Profibus-DP connectors", page 32](#)
- 4-pin EtherCAT® connector
⇒ [Chapter "4.3.3 EtherCAT® connectors", page 33](#)

**Versions of the field bus
connector**


4.3.1 CAN connectors

4.3.1.1 Technical data for the CAN bus interface

EMC protection requirements	Immunity to interference as per DIN EN 61000-6-2 (evaluation criterion A) Emitted interference as per DIN EN 61000-6-4
Connectors X3 and X4	5-pin connector with pin contacts and one with socket connectors (both M12x1, coding A) ⇒ Chapter "4.3.1.2 Pin assignment, CAN connectors", page 32
Physical	ISO/DIS 11898 CAN-HIGH SPEED
Maximum voltage capacity	±40 V long-term (between CAN_H and CAN_L) ±500 V long-term referred to supply zero (optical isolation) ±2.5 kV ESD (classification A: Human Body Model, C = 100 pF, R = 1.5 kΩ)
Maximum permissible number of CAN bus nodes	32 or 110 ⇒ Chapter "6.7.2 Permissible number of CAN bus nodes", page 67

Table 4: Technical data for the CAN bus interface

4.3.1.2 Pin assignment, CAN connectors

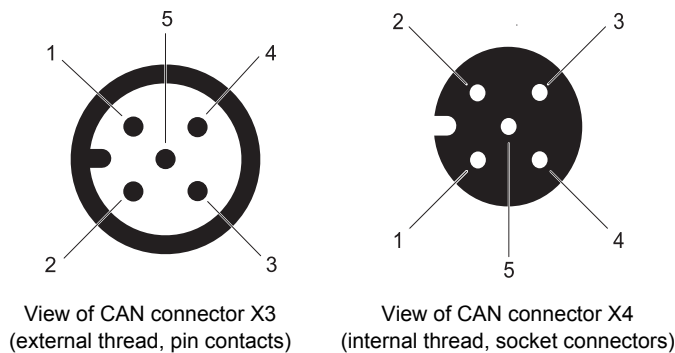

**CAN connectors
X3 and X4 (M12, 5-pin)**

Pin	Assignment	Description
1	CAN_SHLD	Shield (fitted on control cabinet side)
2	CAN_V+	Not connected in the valve
3	CAN_GND	Isolated ground to supply zero
4	CAN_H	Transceiver H
5	CAN_L	Transceiver L

Figure 9: CAN connectors X3 and X4 (M12, 5-pin)

CAUTION



To prevent the connector from being damaged, pay attention to the alignment of the key.

To connect the valves/pumps to a CAN bus network, we recommend molded cord sets with an integral straight mating connector.

⇒ Chapter "6.7 Wiring CAN networks (X2, X3, X4)", page 64

4.3.2 Profibus-DP connectors


4.3.2.1 Technical data for the Profibus-DP interface

EMC protection requirements	Immunity to interference as per DIN EN 61000-6-2 (evaluation criterion A) Emitted interference as per DIN EN 61000-6-4
Connectors X3 and X4	5-pin connector with pin contacts and one with socket connectors (both M12x1, coding B) ⇒ Chapter "4.3.2.2 Pin assignment, Profibus-DP connectors", page 33
Physical	Conformity as per test specification "PROFIBUS slaves Version 2.0 of the PNO, Order-No: 2.032"
Maximum voltage capacity	-9 V to 14 V (long-term) from signal cable to Profi GND ±500 V long-term referred to supply zero (optical isolation) ±40 V with a pulse of 15 µs via a resistance of 100 Ω with an edge duration < 100 ns.
Maximum permissible number of Profibus-DP nodes	32 bus nodes without repeater With repeater up to 126 nodes

**Technical data for the
Profibus-DP interface**

Table 5: Technical data for the Profibus-DP interface

4.3.2.2 Pin assignment, Profibus-DP connectors

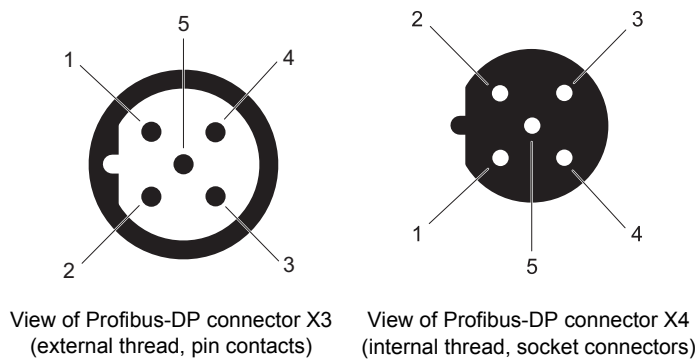

Profibus-DP connectors X3 and X4 (M12, 5-pin)

Pin	Assignment	Description
1	Profi V+	Supply voltage +5 V for terminal resistors
2	Profi A	RXD/TXD-N
3	Profi GND	Isolated ground to supply zero
4	Profi B	RXD/TXD-P
5	Shield	Positioned on control cabinet side

Figure 10: Profibus-DP connectors X3 and X4 (M12, 5-pin)

CAUTION



To prevent the connector from being damaged, pay attention to the alignment of the key.

To connect the valves/pumps to a Profibus-DP network, we recommend molded cord sets with an integral straight mating connector.

⇒ Chapter "6.8 Wiring Profibus-DP networks (X3, X4)", page 68

4.3.3 EtherCAT® connectors


4.3.3.1 Technical data for the EtherCAT® interface

EMC protection requirements	Immunity to interference as per DIN EN 61000-6-2 (evaluation criterion A) Emitted interference as per DIN EN 61000-6-4
Connectors X3 and X4	4-pin connector with socket connectors (both M12, coding D) as per DIN EN 61076-2-101 , Appendix 1 ⇒ Chapter "4.3.3.2 Pin assignment, EtherCAT® connectors", page 34
Physical	4-core, paired cable as per CAT 5 for 100-Base-TX transmission Network topology: Tree and line Termination: Inside device Transmission rate: 100 Mbit/s As per DIN EN 61158-2 Type 12 EtherCAT®, "PHYSICAL LAYER SPECIFICATION AND SERVICE DEFINITION" and ISO/IEC 8802-3 100 Base-TX (IEEE 802.3 Section 24)
Maximum voltage capacity	±500 V long-term referred to supply zero (optical isolation)
Maximum permissible number of EtherCAT® bus nodes	65,536 The maximum number of nodes in a field bus line is 216.

Technical data for the EtherCAT® interface

Table 6: Technical data for the EtherCAT® interface

4.3.3.2 Pin assignment, EtherCAT® connectors

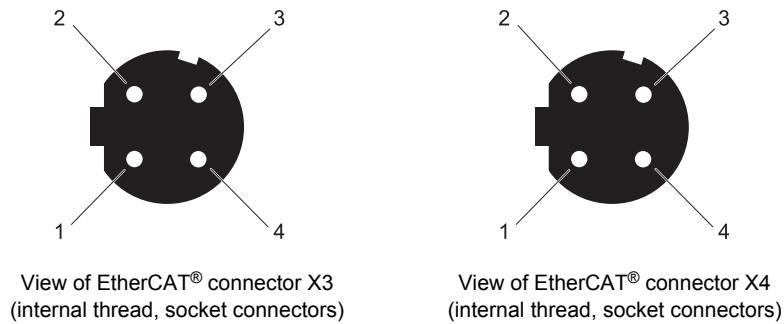

**EtherCAT® connectors
X3 and X4 (M12, 4-pin)**

Pin	Assignment	Description
1	TX+	Transmit
2	RX+	Receive
3	TX-	Transmit
4	RX-	Receive
Housing	Shield	Positioned on control cabinet side

Figure 11: EtherCAT® connectors X3 and X4 (M12, 4-pin)

CAUTION



To prevent the connector from being damaged, pay attention to the alignment of the key.


To connect the valves/pumps to an EtherCAT® network, we recommend molded cord sets with an integral straight mating connector.

⇒ [Chapter "6.9 Wiring EtherCAT® networks \(X3, X4\)", page 71](#)

4.4 Analog input connectors X5, X6 and X7

The analog inputs of connectors X5, X6 and X7 have a resolution of 14 bits.

4.4.1 Pin assignment, analog input connectors X5, X6 and X7



**Analog input connectors
X5, X6 and X7 (M8, 4-pin)**

View of analog input connectors
X5, X6 and X7
(internal thread, socket connectors)

Pin	Assignment	Description
1	Transducer supply	+24 V, $I_{\max} (X2+X5+X6+X7) = 300 \text{ mA}$ referred to pin 3
2	Reference point of analog input	Reference point for pin 4
3	Transducer supply 0 V	Supply zero
4	Analog input	Current or voltage input referred to pin 2

Figure 12: Analog input connectors X5, X6 and X7 (M8, 4-pin)

⇒ Chapter "6.10 Wiring analog inputs (X5, X6, X7)", page 74

Power supply to the transducer

The transducer is supplied with power via pin 1 of connectors X5, X6 and X7.

⇒ Figure 12, page 35

- i** There is joint fusing of this power supply for X2, X5, X6 and X7. The total supply current must therefore not exceed the following value:
 $I_{\max} (X2+X5+X6+X7) = 300 \text{ mA}$

**Power supply to
the transducer at
connectors X5, X6, X7**

An external power supply to the transducer is also possible. However, the 0 V transducer supply must be connected to supply zero. An interruption of the transducer supply current can be identified as a cable break (see "Firmware" User Manual).

The supply voltage is cut off in the event of a possible short circuit in the supply voltage to the transducer. A fault reaction can be configured (see "Firmware" User Manual). The voltage is available again as soon as the short circuit has been eliminated.

4.4.2 Signal types

The analog inputs are available in the following versions:

- ± 10 V
- 0–10 V
- 0–10 mA
- 4–20 mA

Signal types of the analog inputs at connectors X5, X6, X7

The inputs can be operated in each case differentially or single-ended (one input cable referred to supply zero).

Which signal type is set for the analog inputs on delivery is dependent on the valve/pump model. The signal types can be configured via the firmware.

 Detailed information can be found in the "Firmware" User Manual.

4.4.2.1 Signal type for the analog input: ± 10 V

In the case of this signal type, the input is configured as a single-ended voltage input with a ± 10 V input range.

Analog input: ± 10 V

⇒ [Chapter "4.4.3 Input resistances", page 37](#)

The potential difference of each input to supply zero must be between -15 V and 32 V.

4.4.2.2 Signal type for the analog input: 0–10 V

In the case of this signal type, the input is configured as either a differential or a single-ended voltage input with a 0–10 V input range.

Analog input: 0–10 V

⇒ [Chapter "4.4.3 Input resistances", page 37](#)

The potential difference of each input to supply zero must be between -15 V and 32 V.

If there is no differential analog source available, the reference point of the analog input (pin 5) must be connected to 0 V of the analog source.

If there is no differential analog source available, the reference point of the analog input (pin 2) must be connected to 0 V of the analog source.

4.4.2.3 Signal type for the analog input: 0–10 mA

In the case of this signal type, the input is configured as either a differential or a single-ended current input with a 0–10 mA input range.

Analog input: 0–10 mA

⇒ [Chapter "4.4.3 Input resistances", page 37](#)

The analog input is deactivated in the event of an excessively high input current.

The potential difference of each input to supply zero must be between -15 V and 32 V.

If there is no floating analog source available, the reference point of the analog input (pin 2) must be connected to 0 V of the analog source.

4.4.2.4 Signal type for the analog input: 4–20 mA

In the case of this signal type, the input is configured as either a differential or a single-ended current input with a 4–20 mA input range.

Analog input: 4–20 mA

⇒ Chapter "4.4.3 Input resistances", page 37

The analog input is deactivated in the event of an excessively high input current.

The potential difference of each input to supply zero must be between -15 V and 32 V.

If there is no floating analog source available, the reference point of the analog input (pin 2) must be connected to 0 V of the analog source.

In the 4–20 mA signal range signals of $I_{in} < 3$ mA (e.g., due to a defective electric cable) signify a fault, which can be evaluated by the valve software.

4.4.3 Input resistances

The input resistances of the analog inputs are dependent on the set signal type and the version.

Input resistances

Signal type	Version	R_D	R_1	R_2
Voltage ± 10 V; 0–10 V	Differential	200 k Ω	250 k Ω	10 k Ω
	Single-ended	200 k Ω	250 k Ω	< 5 Ω
Current 0–10 mA; 4–20 mA	Differential	210 Ω	100 k Ω	10 k Ω
	Single-ended	210 Ω	100 k Ω	< 5 Ω

Table 7: Input resistances X5, X6, X7


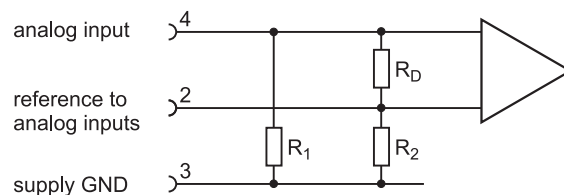


Figure 13: Equivalent circuit diagram of analog input

4.5 Connector X8 for external LVDT



**External LVDT
connector X8 (M12, 5-pin)**

View of connector X8
for external LVDT
(internal thread, socket connectors)


Pin	Assignment	Description
1	A1	Start of primary winding
2	A21	Start of secondary winding 1
3	E1	End of primary winding
4	E2	End of secondary windings 1+2
5	A22	Start of secondary winding 2

Figure 14: External LVDT connector X8 (M12, 5-pin)

CAUTION This connection is not intended for customer use.



4.6 Plug connection X9 for 4/2- or 2/2-way seat valve

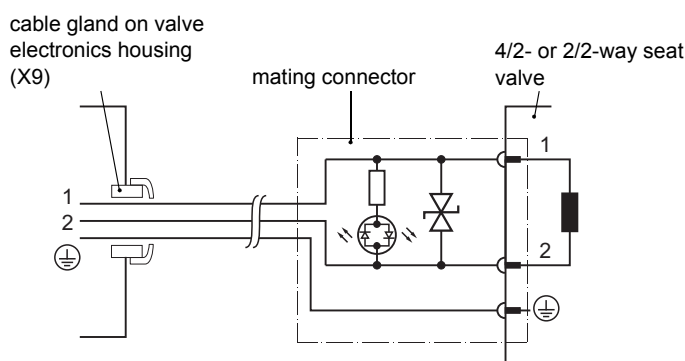


**Block diagram of the plug
connection of the 4/2- or
2/2-way seat valve
(with free-wheeling and
light emitting diode)**

Figure 15: Block diagram of the plug connection of the 4/2- or 2/2-way seat valve
(with free-wheeling and light emitting diode)

CAUTION This connection is not intended for customer use.



4.7 Service connector X10



View of service connector X10
(external thread, pin contacts)

**Service connector X10
(M8, 3-pin)**

Pin	Assignment	Description
1	CAN_H	Transceiver H
3	CAN_GND	Not assigned
4	CAN_L	Transceiver L

Figure 16: Service connector X10 (M8, 3-pin)

Valves/pumps without CAN bus interfaces can be started up and configured via the service interface (service connector X10) with the Moog Valve Configuration Software.

4.8 Pilot valve connector X11

The connection to the pilot valve is established with connector X11.

Pilot valve connector X11

CAUTION This connection is not intended for customer use.



For your notes.

5 Status display

The module status LED «MS» indicates the device status.

The network status LED «NS» indicates the status of the field bus network.

The number and the function of light emitting diodes are dependent on the field bus.

5.1 Module status LED «MS»

The module status LED «MS» indicates the operating state of the valve/pump electronics.

Module status LED «MS»	Description	Valve status (status word) as per VDMA profile
Off	No power supply.	
Blinking green	Standby operational mode (valve).	'INIT' or 'DISABLED'
Green	Normal operation.	'HOLD' or 'ACTIVE'
Blinking red	Correctable fault (see Fault Reaction Settings in "Firmware" User Manual).	'FAULT' or 'FAULT_HOLD'
Red	Unrecoverable error (see Fault Reaction Settings in "Firmware" User Manual).	'NOT_READY'

States of the module status LED «MS»

Table 8: States of the module status LED «MS»

5.2 Network status LED «NS»

The network status LED «NS» indicates the status of the field bus network.

5.2.1 Valves/pumps with CAN bus interface




Figure 17: Layout of LEDs on front of housing of valve/pump electronics with CAN bus interface

Network status LED «NS»	Description	Network management status (NMT) as per CANopen
Off	No power supply or in the 'STOPPED' status.	'STOPPED'
Blinking green	This status is indicated after powering up. SDO communication is possible.	'PRE-OPERATIONAL'
Green	This status must be requested by the CANopen master. SDO and PDO communication is possible.	'OPERATIONAL'

States of the network status LED «NS» on valves/pumps with CAN bus interface

Table 9: States of the network status LED «NS» on valves/pumps with CAN bus interface

5.2.2 Valves with Profibus-DP interface




Figure 18: Layout of LEDs on front of housing of valve/pump electronics with Profibus-DP interface

Network status LED «NS»	Description	Profibus-DP network status
Off	No power supply.	
Blinking orange	The valve is searching for the correct baud rate.	'BAUD_SEARCH'
Orange	The valve has identified the baud rate and is expecting a parameter telegram.	'WAIT_PRM'
Blinking green	The valve is expecting a configuration telegram.	'WAIT_CFG'
Green	The valve is in data exchange mode.	'DATA_EXCH'

States of the network status LED «NS» on valves/pumps with Profibus-DP interface

Table 10: States of the network status LED «NS» on valves/pumps with Profibus-DP interface

5.2.3 Valves with EtherCAT® interface

The Link/Activity LEDs «L/A in» and «L/A out» indicate the physical connection of the Ethernet-/EtherCAT® connections X3 (Input) and X4 (Output).

The Run LED «RUN» indicates the network communication state of the device.

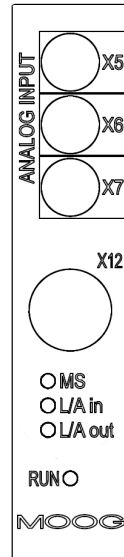


Figure 19: LEDs on front of the housing of valve/pump electronics with EtherCAT® interface

LED «RUN»	Network Communication State
Off	Device is in state 'INIT'.
Blinking	Device is in state 'PRE-OPERATIONAL'.
Single flash	Device is in state 'SAFE-OPERATIONAL'.
On	Device is in state 'OPERATIONAL'.

Table 11: States of the Run LED «RUN» on valves/pumps with EtherCAT® interface

**States of the Run LED
«RUN» on valves/pumps
with EtherCAT® interface**

LEDs «L/A in» or «L/A out»	Network Link/Activity State	Link	Activity
Off	No physical connection.	No	No
Flickering	Physical connection established and data transfer.	Yes	Yes
On	Physical connection established. No data transfer.	Yes	No
Blinking fast	Physical connection incomplete.	No	No

Table 12: States of the Link/Activity LEDs «L/A in» and «L/A out» on valves/pumps with EtherCAT® interface

**States of the Link/Activity
LEDs «L/A in» and
«L/A out» on
valves/pumps with
EtherCAT® interface**

The state "Blinking fast" is e.g. caused by a cable break of a single wire. To distinguish between the states "Blinking fast" and "Flickering", stop the network master to avoid network traffic. If the L/A LED is still blinking fast, please check the cabling.

On previous valves you will find the network status LEDs «NS in» and «NS out».



Network status LEDs «NS in» or «NS out»	EtherCAT® state machine (ESM)	Description
Off		No power supply or not connected.
Orange	'INIT'	Link up.
Green blinking	'PRE-OPERATIONAL' 'SAFE-OPERATIONAL'	Connected. SDO communication is possible.
Green	'OPERATIONAL'	Connected. SDO and PDO communication are possible.
Red		A network major error has occurred.

States of the network status LEDs «NS in» and «NS out» on valves/pumps with EtherCAT® interface

Table 13: States of the network status LEDs «NS in» and «NS out» on valves/pumps with EtherCAT® interface

For your notes.

6 Wiring

CAUTION



Dirt or moisture can get into the valve/pump electronics through unplugged connectors, i.e., if a mating connector is not inserted, which may result in the valve or the pump being damaged.

Unplugged connectors must be covered and sealed.

The plastic dust protection caps which are attached to service connectors X5, X6, X7 and X10 on delivery are suitable for use as sealing covers.

The plastic dust protection caps which are attached to field bus connectors X3 and X4 on delivery are not suitable for use as sealing covers.

Suitable metallic dust protection caps for field bus connectors X3 and X4 are available as accessories.

⇒ [Chapter "9.2 Accessories", page 84](#)

Cover unplugged connectors with dust protection caps

6.1 General notes on wiring

6.1.1 Tools and materials required

The following are required for electrically connecting the valves/pumps:

- Mating connector for connector X1 (6+PE-pin or 11+PE-pin, depending on model)
- Connection cables for mating connector
- Crimping tool for mating connector with corresponding crimping insert
- Installation tool

Tool required

The above-mentioned connectors, cables and tools are not included in the valve/pump scope of delivery. They are supplied separately.

⇒ [Chapter "9.2 Accessories", page 84](#)

6.1.2 Procedure

Procedure for electrically connecting the valves/pumps:

1. Conduct electrical connection in accordance with the pin assignment.
⇒ [Chapter "4.1 Connector X1", page 19](#)
2. Establish equipotential bonding, protective grounding and electrical shielding.
⇒ [Chapter "6.2 Protective grounding and electrical shielding", page 48](#)
⇒ [Chapter "6.3 Permissible lengths for connection cables", page 54](#)
3. Valves/pumps with field bus interface: carry out field bus wiring.
⇒ [Chapter "6.7 Wiring CAN networks \(X2, X3, X4\)", page 64](#)
⇒ [Chapter "6.8 Wiring Profibus-DP networks \(X3, X4\)", page 68](#)
⇒ [Chapter "6.9 Wiring EtherCAT® networks \(X3, X4\)", page 71](#)
4. Check whether all the connectors and if necessary the service connector to which no mating connector is attached are covered with a suitable dust protection cap.
5. If necessary, attach a dust protection cap.

Procedure for electrical connection

6.1.3 Wiring supply cables and digital and analog signals

Supplying the analog inputs with differential signals is to be preferred. If the signal cannot be transmitted differentially, the reference point of the input at the valve must be connected to ground (supply zero).

⇒ Chapter "6.4.1 Single-ended command signals", page 60

Because current inputs have a lower input resistance than voltage inputs and are thus immune to interference, using current signals is to be preferred.

Evaluating the different signal types

Signal type	Benefits
±10 V or 0–10 V	Direct, non-interruptive measurement of the signal, e.g., with an oscilloscope.
±10 mA or 0–10 mA	Large transmission lengths are possible.
4–20 mA	Detection of faults in the electrical line and large transmission lengths are possible.

Benefits of the different signal types for analog inputs

Table 14: Benefits of the different signal types for analog inputs

6.2 Protective grounding and electrical shielding

6.2.1 Overview

Our valves/pumps with integrated electronics are equipped with a protective conductor connection (⊕) in the connector or on the valve/pump body in accordance with the requirements of the standard [DIN EN 60204](#).

This chapter contains guidelines on protective grounding and electrical shielding of cables in applications in which our valves/pumps with integrated electronics are used.

Guidelines for protective grounding

WARNING



The protective conductor connection (⊕), if provided, is connected to the electronics housing or valve/pump body. The insulating elements used are designed for the safety extra low voltage range.

The circuits of the field bus connections, if provided, are only functionally isolated from other connected circuits.

Compliance with the safety regulations requires that the equipment be isolated from the mains system in accordance with [DIN EN 61558-1](#) and [DIN EN 61558-2-6](#) and that all voltages be limited in accordance with [DIN EN 60204-1](#).

We recommend the use of SELV/PELV power packs.

Isolation from the mains system

CAUTION



The valves/pumps should only be used in such machines and plants which comply with the requirements of the standard [DIN EN 60204-1](#) and this chapter.

6.2.2 Equipotential bonding and protective grounding

- The purpose of equipotential bonding is to establish as small a potential difference as possible within the machine.
- Protective grounding serves to maintain safety while the machine is in operation.
- The term protective earth or PE denotes only one single point inside the machine: the terminal of the external protective conductor. All further connections to ground ($\oplus$) are established via protective and equipotential bonding conductors.

Equipotential bonding and protective grounding of machines

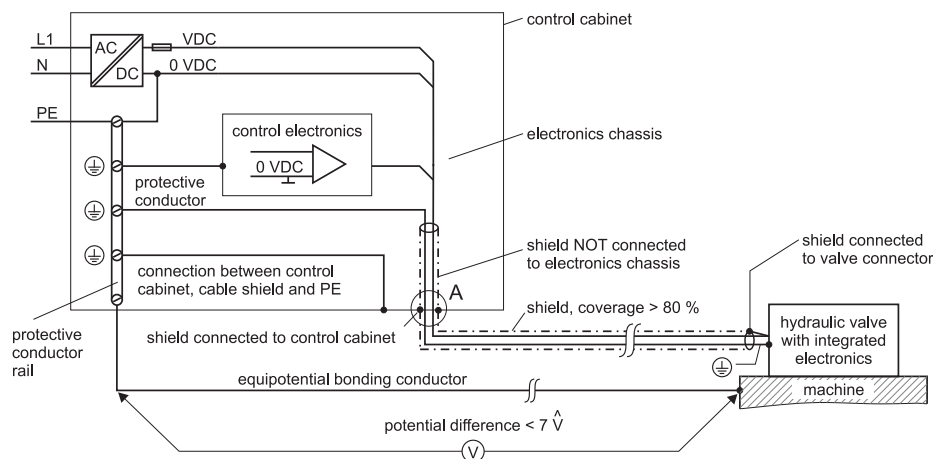


Figure 20: Equipotential bonding and protective grounding of machines (see also [DIN EN 60204-1](#)) and electrical shielding of our valves/pumps with integrated electronics

6.2.2.1 General principles

CAUTION



The equipotential bonding and protective conductor system for a machine in which the valves/pumps are to be used must be designed in accordance with [DIN EN 60204-1](#).

Observe the following points when performing equipotential bonding and protective grounding:

- Connect all elements of the machine to each other via equipotential bonding conductors.
- Connect all elements of the machine which have exposed metal surfaces via protective conductors to the protective conductor rail.
- Connect all the protective conductors and the equipotential bonding conductor in the main cabinet via the protective conductor rail to the protective earth (PE) terminal.



The cross section of the protective conductor is specified in [DIN EN 60204-1](#), Section 8. The following cross section have proven successful for equipotential bonding conductors:

Up to 200 m (218 yd) cable length: 16 mm² (AWG 6)

Over 200 m (218 yd) cable length: 25 mm² (AWG 4)



The potential difference between any two points within the machine should not be more than 7 V peak (7 $\hat{V}$).

- Connect the electrical shielding and the electrical ground of the electronics chassis point-to-point to the protective conductor rail.
- Before releasing a machine for normal operation, always check that all equipotential bonding and protective conductors are in proper working order in accordance with [DIN EN 60204-1](#), Section 18.

Performing equipotential bonding

Required cross section of the protective conductor

Maximum potential difference

6.2.2.2 Protective conductor

The protective conductor acts as a diverter to ground in the event of a short circuit of a hazardous voltage to a protective-conductor-connected, conducting part which can be touched.

Requirements of the protective conductor

CAUTION



This protective conductor is not a replacement for the normal equipotential bonding system.

⇒ [Chapter "6.2.2.1 General principles", page 50](#)

The protective conductor must not be used for equipotential bonding.

Always connect the valves/pumps via a protective conductor to the machine's protective earth (PE). Observe the following points when connecting the protective conductor:

- The protective conductor must be made of copper.
- When using supply cables with a cross section $S \leq 16 \text{ mm}^2$ (AWG 6 or lower), make sure that the protective conductor has the minimum cross section S.
- The protective conductor should be guided within the cable shield.
⇒ [Chapter "6.2.4.1 Cables", page 51](#)
- The connection is made via the leading protective conductor terminal post ($\oplus$) of the valve connector or via the valve body terminal ($\oplus$).

6.2.2.3 Ground loops

If a valve/pump is connected to protective earth (PE) both via the equipotential bonding system and via the valve/pump protective conductor, a compensating current can split in the resulting ground loop. This current can cause serious malfunctions in the machine.

Observe the following points in order to minimize as much as possible malfunctions caused by a ground loop:

- Route the valve/pump supply and signal cables as closely as possible to the equipotential bonding conductor.
⇒ Chapter "6.2.3 Machines with deficient equipotential bonding", page 51
- The impedance of the equipotential bonding system should be less than 10 % of the impedance of the systems comprising cable protective conductors and shields.

Avoiding ground loops

6.2.3 Machines with deficient equipotential bonding

Only poor equipotential bonding is provided in many industrial applications. An effective equipotential bonding system must be set up in compliance with DIN EN 60204-1, Section 8, here.

⇒ Chapter "6.2.2 Equipotential bonding and protective grounding", page 49

Deficient equipotential bonding

CAUTION



If this is not possible, the machine will not comply with DIN EN 60204-1!

Extreme caution must be exercised here as very high currents can pass through the protective conductor ⊕ connection of the valve/pump.

⇒ Chapter "6.2.4.3 Insulated shielding", page 53

6.2.4 Electrical shielding

An effectively shielded machine is to a high degree immune to external interference sources. Furthermore, the interference emitted by the machine is reduced considerably by effective shielding.

A functioning equipotential bonding system provides the basis for an effectively shielded machine. To ensure that the cables are effectively shielded, it is essential to satisfy the general requirements with regard to equipotential bonding and protective grounding.

⇒ Chapter "6.2.2 Equipotential bonding and protective grounding", page 49

Electrical shielding

6.2.4.1 Cables

Observe the following points when choosing cables for connecting the valves/pumps:

- Only use shielded cables.
- The cable shield should be made of copper braiding with a minimum 80 % coverage.
- The individual conductors must be made of copper and have a minimum cross section of 0.2 mm² (AWG 24 or lower) in accordance with DIN EN 60204-1, Table 5.
- Use cables with twisted pair conductors in environments with high background noise levels.
- The protective conductor should be guided within the cable shield.
⇒ Chapter "6.2.2.2 Protective conductor", page 50

Requirements of cables

6.2.4.2 Connecting the shield

- i** When connecting the shield, use metal shell connectors with a leading protective earth contact (⊕) in accordance with [DIN EN 60204-1](#).

Connection on valve/pump side

Connect the cable shield conductively to the metal shell of the connector.

Connecting the shield on the valve/pump side

Connection on control cabinet side

Connection on the control cabinet side can be completed with either lead-through cables or connectors.

Connecting the shield on the control cabinet side

Cable leadthrough

Observe the following points when connecting the shield on the control cabinet side:

Connecting the shield with cable leadthrough

- Connect the control cabinet's wall conductively to the protective conductor rail (⊕).
⇒ [Figure 20, page 49](#)
- Connect the cable shield correctly (flat, conductively) to the control cabinet's wall.

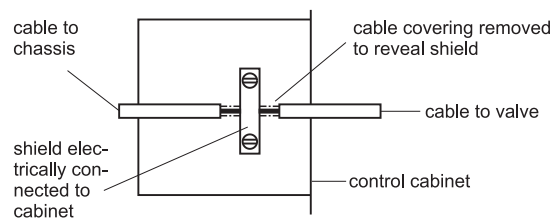


Figure 21: Connecting the shield to the control cabinet's wall (detail A from Figure 20)

- Lead the cable shield without interruption through the wall of the EMC-compliant control cabinet as closely as possible to the electronics chassis, e.g., by means of a cable gland.

- i** The cable shield must not be connected to the electronics chassis!

Plug connection

Observe the following points when connecting the shield on the control cabinet side:

Connecting the shield with plug connection

- Connect the control cabinet's wall conductively to the protective conductor rail (⊕).
⇒ [Figure 20, page 49](#)
- Connect the shield of the cable coming from the valve to the housing of the removable connector.

- i** The housing of the connector permanently mounted in the control cabinet must demonstrate a good-conducting connection with the wall of the control cabinet.

- Connect the connector mounted in the wall of the control cabinet to the shield inside the cabinet.

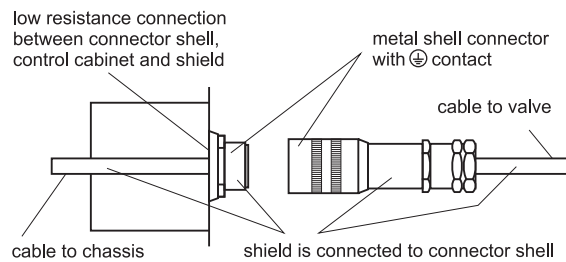


Figure 22: Connecting the cable shield via connector to the control cabinet's wall (detail A from Figure 20)

- Lead the shield inside the control cabinet as closely as possible to the electronics chassis.

i The cable shield must not be connected to the electronics chassis!

6.2.4.3 Insulated shielding

If connecting the shield to both ends of the cable is not desirable, such as e.g., in a machine with deficient equipotential bonding, insulated shielding may be required. However, this is normally only necessary if it is not possible to establish a good equipotential bonding system.

Insulated shielding in the event of deficient equipotential bonding

Observe the following points when connecting insulated shielding:

- Use metal shell connectors with a leading protective earth contact (⊕) in accordance with [DIN EN 60204-1](#).
- Connect the cable shield conductively to the metal shell of the connector.
- Connect the control cabinet's wall conductively to the protective conductor rail (⊕).
- ⇒ [Figure 20, page 49](#)
- Connect the cable shield via a capacitor (e.g., 10 nF / 100 VDC ceramic capacitor) to the control cabinet's wall.

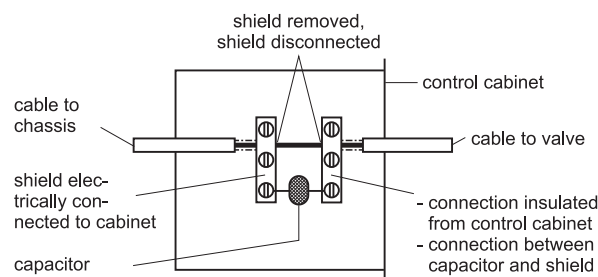


Figure 23: Connecting the insulated shielding to the control cabinet's wall (detail A from Figure 20)

- Install a separate shield connected to the control cabinet's wall inside the control cabinet. Lead this shield as closely as possible to the electronics chassis.

i This shield must not be connected to the electronics chassis!

6.2.4.4 Cable routing

The routing of the cable inside a machine must comply with the following general guidelines:

- Route supply and signal cables in separate cable conduits.
- In order to minimize malfunctions caused by a ground loop, route the valve/pump connection cables as closely as possible to the equipotential bonding conductor.
⇒ Chapter "6.2.2.3 Ground loops", page 51
- Do not route cable conduits near strong electromagnetic interference sources, such as e.g., electric motors or transformers.
- If the cable routing cannot eliminate the risk of lightning strokes completely, suitable protective measures must be taken, as described in DIN EN 60204-1.

Cable routing inside the machine

6.3 Permissible lengths for connection cables

6.3.1 Introduction

Our valves/pumps with integrated electronics are usually supplied with 24 V via supply cables and controlled via analog or digital signal cables.

Dimensioning of supply and signal cables

This section of the chapter is intended to serve as a guide to dimensioning and configuring supply and signal cables in order to guarantee adequate supply voltage and signal quality for all the permissible valve/pump operating states.

The maximum permissible length of supply and signal cables is limited by the resistance and the capacitance per unit length of the cables.

6.3.2 Typical values for copper cables

The typical values specified here are used in the example calculations in the following sections.

6.3.2.1 Resistance of cable

The typical resistance R_{typ} of a copper cable of length ℓ is calculated as follows:

Calculating the resistance

$$R_{\text{typ}} = \frac{\rho_{\text{Cu}}}{q_{\text{typ}}} \cdot \ell = 23.73 \frac{\text{m}\Omega}{\text{m}} \cdot \ell$$

$$q_{\text{typ}} = 0.75 \text{ mm}^2 (\text{AWG19}) \quad \text{Typical cross section used for connection cables}$$

$$\rho_{\text{Cu}} = 0.0178 \frac{\Omega \text{mm}^2}{\text{m}} \quad \text{Resistivity of copper at 20 °C (68 °F)}$$

6.3.2.2 Capacitance of cable

The typical capacitance per unit length of copper cables is 50 pF/m.

The typical capacitance C_{typ} of a copper cable of length ℓ is calculated as follows:

Calculating the capacitance

$$C_{\text{typ}} = 50 \frac{\text{pF}}{\text{m}} \cdot \ell$$

6.3.3 24V supply cables

The maximum permissible length $\ell_{\max}$ of the supply cable is calculated as follows:

Calculating the maximum length of supply cables

$$\ell_{\max} = \frac{U_{\text{dr_max}}}{\left(\frac{U_{\text{ab}}}{\ell}\right)_{\text{typ}}}$$

$$U_{\text{dr_max}} = \ell_{\max} \cdot \left(\frac{U_{\text{ab}}}{\ell}\right)_{\text{typ}}$$

$U_{\min} = 18 \text{ V}$ Lowest permissible supply voltage for valve/pump

$U_{\text{dr_max}} = 6 \text{ V}$ Maximum permissible voltage drop over the supply cable

$$U_{\text{dr_max}} = 24 \text{ V} - U_{\min}$$

$\left(\frac{U_{\text{ab}}}{\ell}\right)_{\text{typ}}$ Voltage drop per unit length
 ⇒ Chapter "6.3.3.1 Voltage drop per unit length", page 55

- ❗ This calculation does not take into account a possible reduction of the power pack output voltage on account of the connected load. Nor does it take into account any voltage dips which can occur at the moment when further loads are connected.

6.3.3.1 Voltage drop per unit length

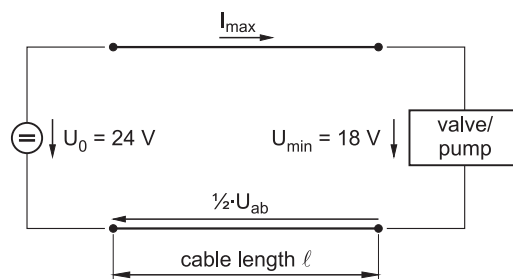


Figure 24: Voltage drop on the supply cable

The voltage drop per unit length over the forward and return lines of the supply cable is calculated as follows:

$$\left(\frac{U_{\text{ab}}}{\ell}\right)_{\text{typ}} = 2 \cdot I_{\max} \cdot \left(\frac{R_{\text{typ}}}{\ell}\right) = 2 \cdot I_{\max} \cdot 23.73 \frac{\text{m}\Omega}{\text{m}}$$

$I_{\max}$ Maximum current consumption of valve/pump
 (see product-specific valve/pump user information)

R_{typ} Typical resistance of the cable
 ⇒ Chapter "6.3.2.1 Resistance of cable", page 54

ℓ Length of the supply cable

6.3.3.2 Examples of the voltage drop of supply cables

Valve series	Max. current consumption $I_{\max}$	Voltage drop $\left(\frac{U_{ab}}{\ell}\right)_{\text{typ}}$	Max. permissible cable length $\ell_{\max}$
D661	300 mA	14 mV/m	428 m (468 yd)
D941	350 mA	17 mV/m	364 m (398 yd)
D681	800 mA	38 mV/m	157 m (171 yd)
D636/8	1,200 mA	57 mV/m	106 m (115 yd)
D634	2,200 mA	104 mV/m	58 m (63 yd)

Examples of the voltage drop of supply cables

Table 15: Examples of the voltage drop of supply cables as a function of the cable length for a cable cross section of 0.75 mm^2

6.3.4 Analog signal cables

Influence of resistance R

The influence of the resistance R of the cable used on the maximum cable length $\ell_{\max}$ for signal cables is very low, as the currents flowing through signal cables are very small.

Influence of resistance R

Example:

For a cable length ℓ of 428 m (468 yd) the resistance R according to the formula below is only 10Ω .

$$R = \frac{\rho_{\text{Cu}}}{q_{\text{typ}}} \cdot \ell = 23.73 \frac{\text{m}\Omega}{\text{m}} \cdot 428 \text{ m} \approx 10 \Omega$$

Influence of capacitance per unit length

The influence of the capacitance per unit length of the cable used on the maximum cable length $\ell_{\max}$ for signal cables is considerably greater.

The coupling capacitance C that increases with the cable length forms with the input resistance R of an analog input a high pass of the first order, which can couple high-frequency interference for example at signal inputs. The limit frequency f_l of the high pass is calculated as follows:

$$f_l = \frac{1}{2 \cdot \pi \cdot R \cdot C}$$

The longer the cable, the lower the limit frequency f_l of the high pass.

Example:

A cable length ℓ of 10 m (10.936 yd) and a typical analog input resistance R of 10 k Ω produce according to the formula below a limit frequency f_l of 32 kHz.

$$f_l = \frac{1}{2 \cdot \pi \cdot R \cdot C} = \frac{1}{2 \cdot \pi \cdot R \cdot 50 \frac{\text{pF}}{\text{m}} \cdot \ell}$$

$$f_l = \frac{1}{2 \cdot \pi \cdot 10 \text{ k}\Omega \cdot 50 \frac{\text{pF}}{\text{m}} \cdot 10 \text{ m}}$$

$$f_l = 32 \text{ kHz}$$

Recommendations

With a differential voltage command signal and a cable length ℓ of 10 m (10.936 yd) the EMC test was conducted in accordance with [DIN EN 61000-6-2](#). The interference on the spool position during the interference (electromagnetic coupling, transient) was below 1 %. This can worsen as the cable is lengthened.

Experience shows that with cable lengths over 15 m (16.404 yd) a current input should be used, as here the input resistance is smaller by a factor of 50.

The limit frequency f_l of the high pass also increases by the same factor, and with it the input becomes more immune to interference.

⇒ [Chapter "Influence of capacitance per unit length", page 57](#)

Furthermore, the voltage drop on the cable does not have an effect in the event of a current command signal.

A differential input is always to be recommended, regardless of whether a voltage or current signal is used as the command signal, since interference coupled on the two input cables is subtracted to virtually zero.

Influence of capacitance per unit length

Calculating the limit frequency

Current input with cable length > 15 m (16.404 yd)

Recommendation: differential input

6.3.5 Digital signal cables

6.3.5.1 Digital signal input cables

Digital signal input cables, such as e.g., enable, are more non-critical with regard to their cable lengths, because the currents are low ($< 20 \text{ mA}$) and a greater noise level distance is easier to maintain, since only two states/levels must be differentiated.

Length of digital signal cables

6.3.5.2 Digital signal output cables

With digital signal output cables, such as e.g., monitoring and standby, currents up to 1.5 A are encountered. In these cases, the voltage drop over longer cables can no longer be neglected. Thus, these cables are subject to the same requirements as supply cables.

⇒ [Chapter "6.3 Permissible lengths for connection cables", page 54](#)

6.3.5.3 Field bus cables

The maximum lengths of field bus cables vary considerably. Most cable ends are terminated with low resistance (power adaptation) in order to avoid signal reflections, which permits longer cable lengths. The maximum possible cable lengths are laid down in the standards of the relevant field buses and depend among other things on the transmission rate used.

Length of field bus cables

6.4 Wiring connector X1

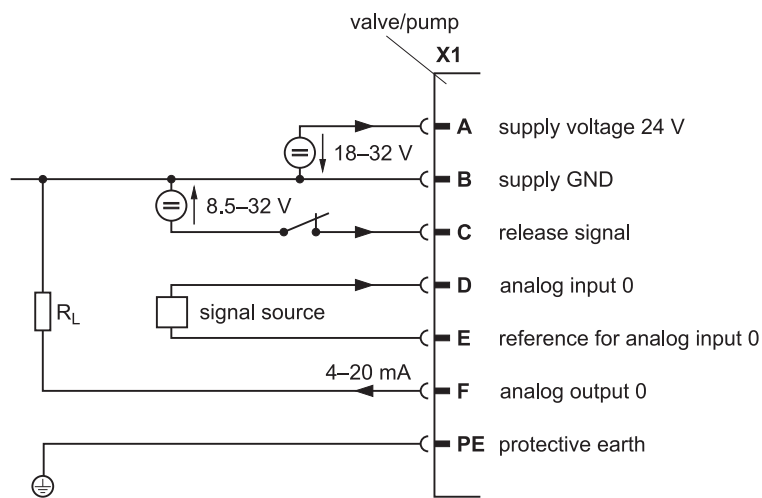


Figure 25: Wiring the 6+PE-pin connector X1

Wiring the 6+PE-pin connector X1

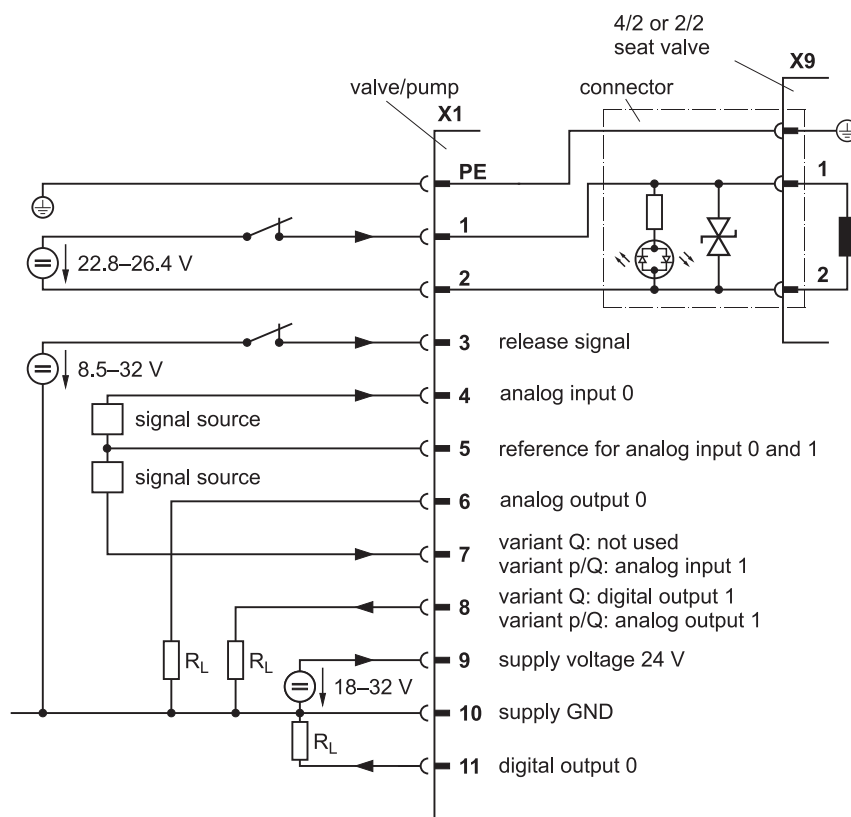


Figure 26: Wiring the 11+PE-pin connector X1

Wiring the 11+PE-pin connector X1

6.4.1 Single-ended command signals

Basically, activation of the command inputs with differential signals is to be preferred. If the command signal cannot be transmitted differentially, the reference point of the command input at the valve or at the pump must be connected to ground (supply zero).

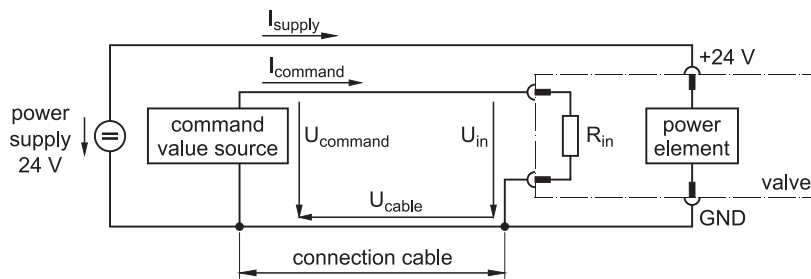


Figure 27: Circuit for single-ended command signals

If the command inputs are connected to ground (single-ended), the connection cable must be as short as possible and have an appropriately large cross section in order to keep the voltage drop as low as possible.

The voltage drop on the forward and return lines is generated by the supply current I_{supply} of the valve/pump electronics power circuit. It is proportional to the length of the connection cable and varies according to the valve/pump status.

Maximum permissible cable lengths:

⇒ [Chapter "6.3 Permissible lengths for connection cables", page 54](#)

The voltage drop U_{cable} on the return line and the resulting potential shift does not result in the command signal U_{command} . U_{in} is being applied at the command input in accordance with the following equation:

$$U_{\text{in}} = U_{\text{command}} - U_{\text{cable}}$$

In the case of command signal sources with impressed current I_{command} , the potential shift of ground (supply zero) has no effect on the signal. However, changes in the voltage drop resulting from the valve's/pump's varying current consumption must be corrected by the command signal source. If current control does not follow the voltage change in terms of time, the command signal at the valve/pump input may also be affected here.

i The function of single-ended command inputs is identical to the function of differential command inputs.

Circuit for single-ended command signals

Single-ended connection of the command inputs

Input voltage

$$U_{\text{in}} = U_{\text{command}} - U_{\text{cable}}$$

Command signal sources with impressed current I_{command}

6.4.2 Conversion of actual value output signals I_{out}

The actual value output signals I_{out} 4–20 mA can be converted into U_{out} 2–10 V in accordance with the following circuit.

Conversion of actual value output signals I_{out} 4–20 mA into 2–10 V

6.4.2.1 Valves/pumps with 6+PE-pin connector X1

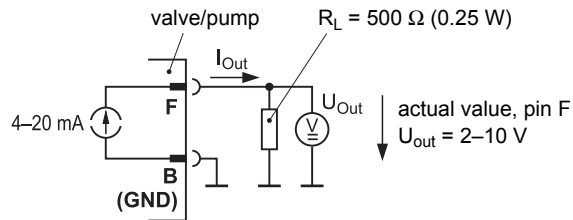


Figure 28: Circuit for converting the actual value output signals I_{out} (for valves with 6+PE-pin connector X1)

6.4.2.2 Valves/pumps with 11+PE-pin connector X1 (variant p/Q)

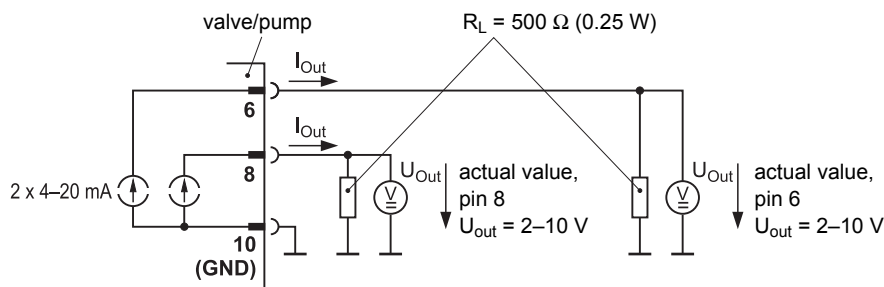


Figure 29: Circuit for converting the actual value output signals I_{out} (for valves with 11+PE-pin connector X1)

6.5 Wiring incremental transducers (X2)

Incremental transducers measure a relative position or angle signal. Here, pulse trains with a frequency of up to 4 MHz are detected without faults and evaluated. The 32-bit actual value is altered as a function of the leading or lagging signal sequence of A and B signals. 4-edge evaluation is used exclusively here.

Example:

A transducer with 1,024 marks per rotation delivers with 4-edge evaluation 4,096 increments per rotation.

With each rising and falling edge of signals A and B, the system checks whether signal B lags behind signal A. If this is the case, the actual value is increased by 1. If signal A lags behind signal B, the actual value is decreased by 1.

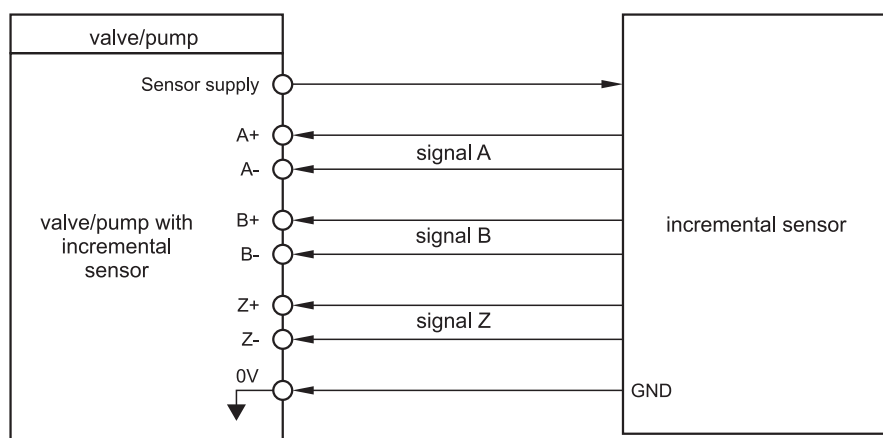


Figure 30: Wiring diagram with incremental transducer

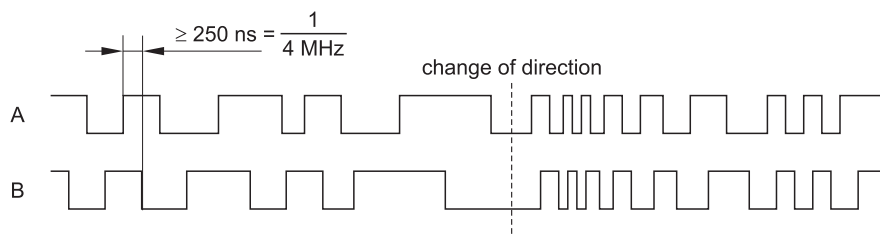


Figure 31: Incremental transducer signals A and B with reversal point and speed variation

In Figure 31 signal B to the left of the reversal point leads signal A. The actual value is decreased by 1 with each edge of A and B.

To the right of the reversal point signal A leads and thus the actual value is increased by 1 with each edge of A and B.

The signal levels conform to the standard [TIA/EIA 422 \(formerly RS 422\)](#).

Signal Z can be used for referencing. A pulse on signal Z marks for example a specific position. The incremental transducer counter can thus be reset (see "Firmware" User Manual).

Wiring incremental transducers (X2)

Wiring diagram with incremental transducer

Incremental transducer signals A and B with reversal point and speed variation

The designations of the connections vary depending on the manufacturer of the incremental transducer:

	Connection designation					
Valve/pump	A+	A-	B+	B-	Z+	Z-
Heidenhain transducers	U_{a1}	$\overline{U_{a1}}$	U_{a2}	$\overline{U_{a2}}$	U_{a0}	$\overline{U_{a0}}$
Hengstler transducers	A	$\overline{A}$	B	$\overline{B}$	N	$\overline{N}$
Stegmann transducers	A	$\overline{A}$	B	$\overline{B}$	M	$\overline{M}$
Allen-Bradley transducers	A	$\overline{A}$	B	$\overline{B}$	Z	$\overline{Z}$

Table 16: Designations of incremental transducer connections
(incremental transducers of different manufacturers)

**Designations of
incremental transducer
connections**

6.6 Wiring SSI transducers (X2)

An SSI transducer delivers an absolute position or angle signal, which can be read in via the digital signal interface.

**Wiring SSI transducers
(X2)**

6.6.1 SSI master mode

In SSI master mode the integrated electronics generate internally the SSI clock signal (CLK) with settable frequencies in the range between 78 kHz and 5 MHz.

 Detailed information can be found in the "Firmware" User Manual.

In the idle state the clock signal is at 1. The first falling edge of the clock signal signals to the SSI transducer to maintain its current value. The following rising edge of the clock signal starts the data transmission of the SSI transducer. The output starts with the highest-value bit (MSB). After a complete data record has been transmitted, the SSI transducer holds the data signal at 0 until it is ready for a new transmission. The switching back of the data signal to 1 simultaneously satisfies the start condition for the SSI interface for triggering a new read-in cycle.

⇒ Chapter "4.2.2 SSI transducer", page 28

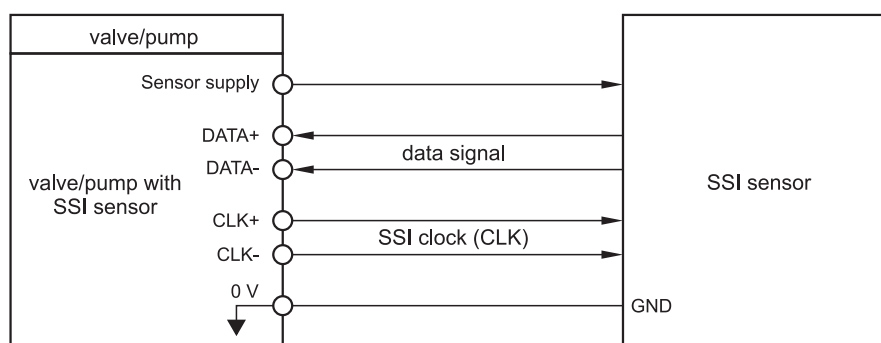


Figure 32: Wiring diagram with SSI transducer

**Wiring diagram with SSI
transducer**

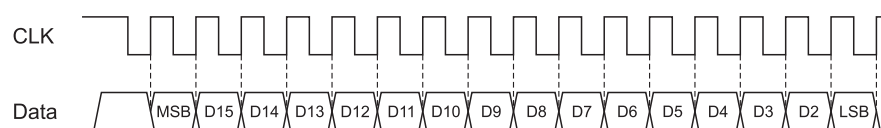


Figure 33: Signals between valve/pump and a 16-bit SSI transducer (example)

**Signals between
valve/pump and a 16-bit
SSI transducer (example)**

The signal levels conform to the standard [TIA/EIA 422 \(formerly RS 422\)](#).

SSI transducers can be used with delivery either Gray codes or binary coded data. A maximum of 32 bits is possible.

 Detailed information can be found in the "Firmware" User Manual.

6.7 Wiring CAN networks (X2, X3, X4)

X3, X4 are equipped with an electrically isolated CAN interface. The CAN interface is supplied internally.

Procedure for connecting the valves/pumps to the CAN bus

Procedure

-  Please observe all the safety instructions prior to and during starting-up.
- ⇒ [Chapter "1.1.2 Completeness", page 2](#)
 - ⇒ [Chapter "2 Safety", page 7](#)
1. Establish the electrical connection to the CAN bus.
⇒ [Chapter "4.3.1 CAN connectors", page 31](#)
 2. Configure the module address.
⇒ [Chapter "6.7.3 CAN module address \(node ID\)", page 67](#)
 3. Configure the transmission rate.
⇒ [Chapter "6.7.4 CAN transmission rate", page 67](#)
 4. Check the configuration of the valve software and the controller settings.

Observe the following points when wiring CAN networks:

- All cables, plug connectors and terminal resistors used in CAN networks must comply with [ISO/DIS 11898](#).
- Correct version of protective grounding and electrical shielding.
⇒ [Chapter "6.2 Protective grounding and electrical shielding", page 48](#)
- Use shielded cables with four cores (twisted pair) and surge impedance of 120 Ω (CAN_H, CAN_L, CAN_GND and CAN_SHLD grounded).
- A CAN bus cable must not branch but short stub cables with T-connectors are permitted.
- Stub cables must be as short as possible.
- Maximum stub cable length:
⇒ [Chapter "6.7.1 Cable lengths and cable cross sections", page 66](#)
- The cable between CAN_L and CAN_H at both CAN bus cable ends must be ended by a terminal resistor of 120 Ω ± 10 %.
- A connector with terminal resistor can be omitted if the valve-internal terminal resistor (deactivated as standard) is activated (for configuration, see "Firmware" User Manual).
- Reference potential CAN_GND and CAN_SHLD may be connected to protective earth (PE) at one point only (e.g., on a connector with terminal resistor).
- The transmission rate must be adapted to the CAN bus cable length.
⇒ [Chapter "6.7.1 Cable lengths and cable cross sections", page 66](#)

- The maximum permissible number of CAN bus nodes in the CAN network must not be exceeded.
⇒ Chapter "6.7.2 Permissible number of CAN bus nodes", page 67
- Do not lay CAN Bus cables in the immediate vicinity of disturbance sources. If interference sources cannot be avoided, use double-shielded cables.

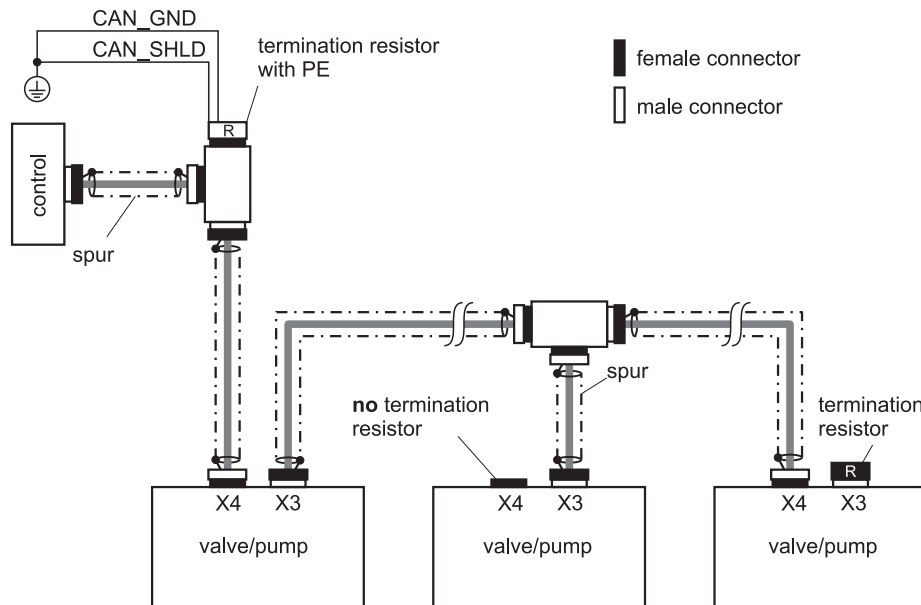


Figure 34: CAN wiring diagram

Wiring diagram of the CAN network

- i** For CAN bus nodes without an isolated CAN bus interface, CAN_GND is generally connected to supply voltage GND inside the device. In these cases, the supply voltage connection cable must be grounded at the same point inside the machine as the CAN_GND connection cable. Maximum interference immunity is achieved in extensive CAN networks by using solely CAN bus nodes with isolated CAN bus interfaces. If it is not possible to dispense with CAN bus nodes without isolated CAN bus interfaces, arrange these nodes in the immediate vicinity of the central ground point. The cable length to this central ground point should be kept as short as possible. It is particularly important in this respect to ensure that the equipotential bonding line is properly dimensioned!

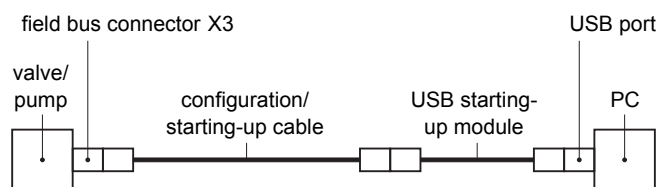
Interference immunity in CAN networks

Figure 35: Connection of valve/pump to a PC via the CAN bus interface (connector X3)

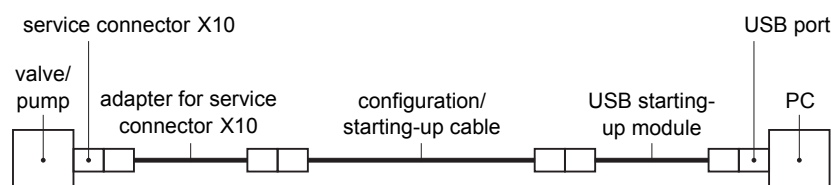
Connection of valve/pump to a PC via the CAN bus interface

Figure 36: Connection of valve/pump to a PC via the service interface (service connector X10)

Connection of valve/pump to a PC via the service interface

6.7.1 Cable lengths and cable cross sections

Transmission rate	Maximum cable length
1,000 kbit/s	25 m (27 yd)
800 kbit/s	50 m (54 yd)
500 kbit/s	100 m (109 yd)
250 kbit/s	250 m (273 yd)
125 kbit/s	500 m (546 yd)
100 kbit/s	650 m (710 yd)
50 kbit/s	1,000 m (1,093 yd)
20 kbit/s	2,500 m (2,734 yd)

Cable lengths and cable cross sections

Table 17: Recommendation for maximum cable lengths in CAN networks, depending on the transmission rate

Cable cross section	Maximum cable length for n CAN bus nodes		
	n = 32	n = 64	n = 100
0.25 mm ² (AWG 24)	200 m (218 yd)	170 m (185 yd)	150 m (164 yd)
0.50 mm ² (AWG 21)	360 m (393 yd)	310 m (339 yd)	270 m (295 yd)
0.75 mm ² (AWG 19)	550 m (601 yd)	470 m (513 yd)	410 m (448 yd)

Maximum cable length

Table 18: Recommendation for maximum cable lengths in CAN networks, depending on the cable cross section and the number n of CAN bus nodes

Transmission rate	Maximum stub cable length	
	Maximum	Cumulative
1,000 kbit/s	2 m (6 ft 7 in)	20 m (21 yd)
500 kbit/s	6 m (19 ft 8 in)	39 m (42 yd)
250 kbit/s	6 m (19 ft 8 in)	78 m (85 yd)
125 kbit/s	6 m (19 ft 8 in)	156 m (170 yd)

Maximum length of stub cables

Table 19: Maximum permissible stub cable lengths in CAN networks

6.7.1.1 Suitable cable types for CAN networks

Parameter	Value
Surge impedance	120 Ω

Suitable cable types for CAN networks

Table 20: Specification of electrical data for CAN bus cables

Manufacturer	Cable type
Hans Turck GmbH & Co. KG Witzlebenstrasse 7 D-45472 Mülheim an der Ruhr Tel.: (+49) 208 4952-0 Fax: (+49) 208 4952-264 Web: http://www.turck.com	5723 PUR bus cable

Table 21: Suitable cable types for CAN networks

6.7.2 Permissible number of CAN bus nodes

The CAN bus interface for the valve/pump electronics supports integration in CAN networks with up to 110 CAN bus nodes.

**Maximum number
of CAN bus nodes**

However, the maximum permissible number of CAN bus nodes can be restricted by other nodes with an older CAN bus driver to 32.

A maximum of 127 nodes can be operated in a CAN network thanks to the use of repeaters. However, it is necessary to bear in mind here the additionally inserted signal propagation time, which limits the maximum expansion of the CAN network.

6.7.3 CAN module address (node ID)

CAUTION



Each module address may only be used once within a CAN bus network.

**CAN module address
(node ID)**

The factory setting for the module address of the valve/pump electronics is 127.

The module address can be changed with the LSS services (Layer Setting Services) via the CAN bus.

If there are no further nodes present on the CAN bus, it is possible to set the node ID via the LSS Service Switch Mode Global.

To change the module address of the valve/pump electronics with a CAN bus network, it is essential to address the valve/pump electronics unambiguously via the LSS address. The node ID is then set via the LSS Service Switch Mode Selective.

It is also possible to configure the module address via service interface X10.



The module address of the valve/pump electronics can also be altered with the Moog Valve Configuration Software.

6.7.4 CAN transmission rate

CAUTION



The transmission rate must be set to the same value for all the CAN bus nodes within a CAN bus network.

CAN transmission rate

The factory setting for the transmission rate is 500 kbit/s.



The transmission rate can be changed with the LSS services (Layer Setting Services) via the CAN bus.



The transmission rate of the valves/pumps can also be altered with the Moog Valve Configuration Software.

6.8 Wiring Profibus-DP networks (X3, X4)

The valves/pumps are equipped with an electrically isolated Profibus-DP interface. The Profibus-DP interface is supplied internally.

**Wiring
Profibus-DP networks**


Procedure for connecting the valves/pumps to the Profibus-DP

Procedure

- ① Please observe all the safety instructions prior to and during starting-up.
 - ⇒ Chapter "1.1.2 Completeness", page 2
 - ⇒ Chapter "2 Safety", page 7
- 1. Establish the electrical connection to the Profibus-DP.
 - ⇒ Chapter "4.3.2 Profibus-DP connectors", page 32
- 2. Set the module address.
 - ⇒ Chapter "6.8.3 Profibus-DP module address (node ID)", page 70
- 3. Check the configuration of the valve software and the controller settings.

Observe the following points when wiring Profibus-DP networks:

- It is recommended to use 2-core Profibus cables so as to prevent the power supply to the terminal resistors from being connected in parallel.
- The specification [DIN EN 61158-2](#) describes two cable types. Type B does not correspond to the latest state-of-the-art technology and should no longer be used.
- Stub cables must be as short as possible.
- Avoid stub cables in the case of transmission rates in excess of 1,500 kbit/s.
- If stub cables are used, do not use any terminal resistors in this branch.
- The stub cable length in the case of transmission rates in excess of 1,500 kbit/s should not exceed 6.6 m (21 ft 7 in) in total.

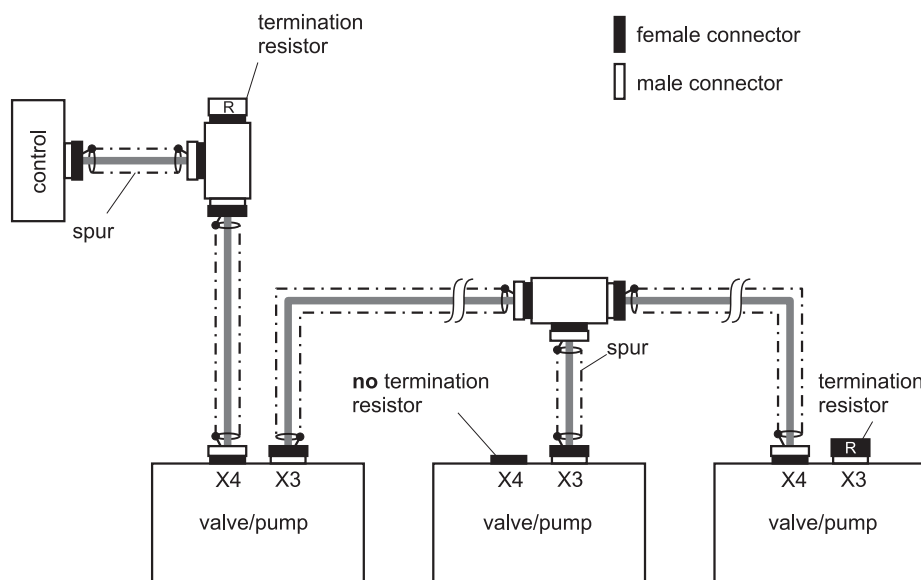

**Wiring diagram of
the Profibus-DP networks**

Figure 37: Profibus-DP wiring diagram

6.8.1 Cable lengths and cable cross sections

Transmission rate	Maximum cable length without repeaters
12,000 kbit/s	100 m (109 yd)
1,500 kbit/s	200 m (218 yd)
500 kbit/s	400 m (437 yd)
187.5 kbit/s	1,000 m (1,093 yd)
93.75 kbit/s	1,200 m (1,312 yd)
45.45 kbit/s	1,200 m (1,312 yd)
19.2 kbit/s	1,200 m (1,312 yd)
9.6 kbit/s	1,200 m (1,312 yd)

Cable lengths and cable cross sections

Table 22: Recommendation for maximum cable lengths in Profibus-DP networks, depending on the transmission rate

6.8.1.1 Suitable cable types for Profibus-DP networks

Parameter	Value
Characteristic cable impedance (Ω)	135–165 at 3–20 MHz
Effective capacitance (pF/m)	< 30
Loop impedance (Ω /km)	< 110
Cable diameter (mm)	> 0.64 (AWG 22 or lower)
Cable cross section (mm ²)	> 0.34 (AWG 22 or lower)

Suitable cable types for Profibus-DP networks

Table 23: Specification of electrical data for Profibus-DP cables (as per type A)

Manufacturer	Cable type
Hans Turck GmbH & Co. KG Witzlebenstrasse 7 D-45472 Mülheim an der Ruhr Tel.: (+49) 208 4952-0 Fax: (+49) 208 4952-264 Web: http://www.turck.com	Prefabricated bus cable type 451 with connector and socket Order designation: RSSW-RKSW451-xx, (length = xx)

Table 24: Suitable cable types for Profibus-DP networks

6.8.2 Permissible number of Profibus nodes

The Profibus-DP interface of the valve/pump electronics supports integration into Profibus-DP networks with up to 32 Profibus nodes.

A maximum of 126 nodes can be operated in a Profibus-DP network thanks to the use of repeaters.

Permissible number of Profibus-DP nodes

6.8.3 Profibus-DP module address (node ID)

CAUTION

Each module address may only be used once within a Profibus-DP network.

Profibus-DP module address (node ID)

The module address can be configured by sending a Set_Slave_Add telegram from a controller. There is also the option of configuring the module address by writing to the Profibus module identifier.

It is also possible to configure the module address via service interface X10.

The factory setting for the module address of the valve/pump electronics is 126.



The module address of the valve/pump electronics can also be altered with the Moog Valve Configuration Software.

6.8.4 Profibus-DP transmission rate

The valve/pump electronics are automatically set to the transmission rate specified by the Profibus master. It is not possible, nor is it necessary, to configure the transmission rate on the valve/pump side.

Profibus-DP transmission rate

6.9 Wiring EtherCAT® networks (X3, X4)

The valves/pumps are equipped with an electrically isolated EtherCAT® interface. The EtherCAT® interface is supplied internally.

Wiring EtherCAT® networks

Procedure for connecting the valves/pumps to the EtherCAT® bus

Procedure

- ① Please observe all the safety instructions prior to and during starting-up.
 - ⇒ Chapter "1.1.2 Completeness", page 2
 - ⇒ Chapter "2 Safety", page 7
- 1. Establish the electrical connection to the EtherCAT® bus.
 - ⇒ Chapter "4.3.3 EtherCAT® connectors", page 33
- 2. Optional: Set the module address.
 - ⇒ Chapter "6.9.3 EtherCAT® module address (node ID)", page 73
- 3. Check the configuration of the valve software and the controller settings, in particular the command signal source.
 - ① Detailed information can be found in the "Firmware" User Manual.

Observe the following points when wiring EtherCAT® networks:

- All cables must be designed as shielded cables with twisted-pair multi-strand wires as per [ISO/IEC 8802-3](#) 100 Base-TX and CAT 5 as per [ANSI/TIA/EIA-568-B.1](#).
- The cable length between two nodes must not exceed 100 m (109 yd) as per [ISO/IEC 8802-3](#) 100 Base-TX.
- The maximum permissible number of EtherCAT® nodes must not exceed 65,536.
- The cable between the nodes must not branch.
- An external cable termination (terminal resistor) as in CAN or Profibus-DP networks is not necessary.


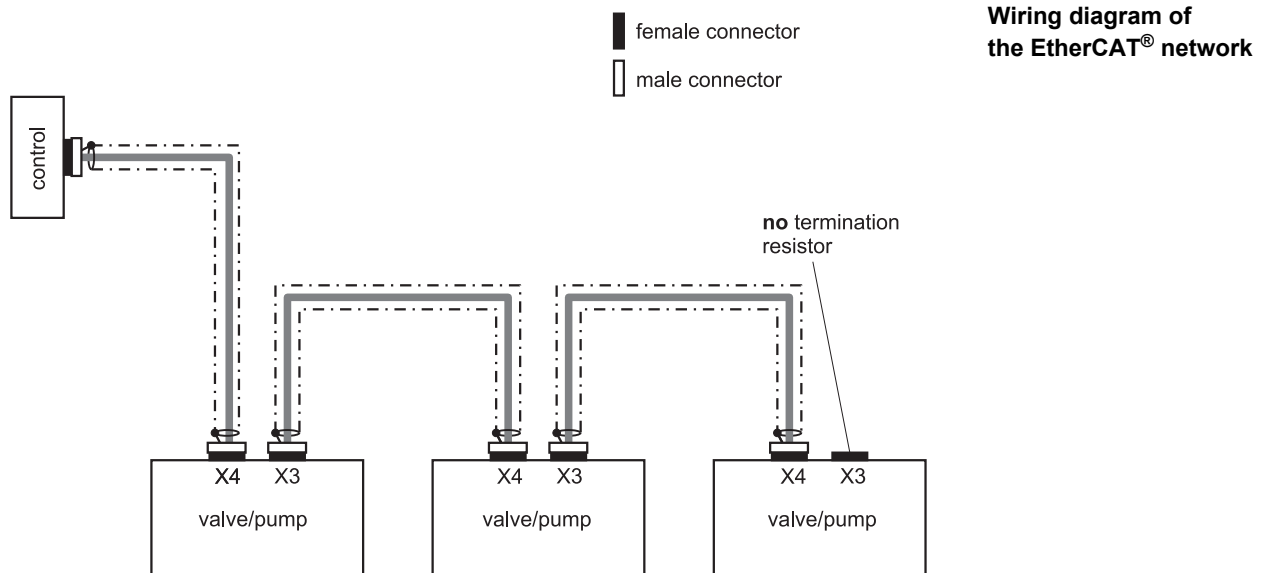


Figure 38: EtherCAT® wiring diagram

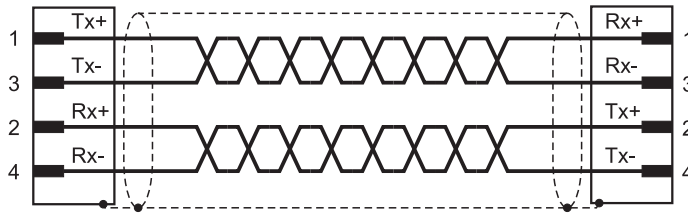

**Pin assignment for
the EtherCAT® cable**

Figure 39: Twisted-pair wires in Ethernet/EtherCAT® cables with M12 connectors

An RJ45 connector is usually used on the controller side. The colors of the wires are standardized in accordance with [IEEE 802.3](#) for Ethernet.

Signal	M12	Wire (M12, 4-core cable)	RJ45	Wire (RJ45, 4-core cable)
TX+	1	yellow	1	orange/white (yellow/white)
RX+	2	white	3	green/white
TX-	3	orange	2	orange
RX-	4	blue	6	green
Shield	Housing			

Table 25: Assignment of Ethernet/EtherCAT® signals with mixed connector types

6.9.1 Suitable cable types for EtherCAT® networks

CAT 5 cable in accordance with [ANSI/TIA/EIA-568-B.1](#).

Manufacturer	Description
Lumberg Connect GmbH Im Gewerbepark 2 D-58579 Schalksmühle Tel.: (+49) 2355-83 01, Fax: (+49) 2355-83 263 Web: http://www.lumberg.com	M12 RJ45 Ethernet adapter; from D-coded M12 socket to RJ45 socket, angled 90 ° Order designation: 0981 ENC 100
Phoenix Contact GmbH & Co. KG Flachsmarktstr. 8 D-32825 Blomberg Tel.: (+49) 5235-300, Fax: (+49) 5235-34 12 00 Web: http://www.phoenixcontact.com	M12 cable, connector on both sides, D-coding Order designation: 1523081

Table 26: Suitable cable types for EtherCAT® networks

**Suitable cable types for
EtherCAT® networks**

6.9.2 Permissible number of EtherCAT® nodes

The EtherCAT® interface of the valve/pump electronics supports integration into EtherCAT® networks with up to 65,535 EtherCAT® nodes.

The maximum number of nodes in a field bus line is 216.

The number of nodes determines the signal propagation time of the data packets and the resulting possible cycle times.

**Permissible number
of EtherCAT® nodes**

6.9.3 EtherCAT® module address (node ID)

CAUTION



Each module address may only be used once within an EtherCAT® network.

**EtherCAT® module
address (node ID)**

EtherCAT® nodes can be addressed using the physical position within the network. This procedure is known as auto-increment addressing.

If position-independent addressing is preferred, a static module address can also be allocated. This addressing type is known as fixed node addressing.

6.9.3.1 Auto-increment addressing

Each EtherCAT® node is identified using the physical position within the network segment. For this purpose, each EtherCAT® node increments a 16-bit address field within a telegram, which is sent through the entire network. The advantage of this mechanism lies in the fact that no module address has to be set manually for the field bus nodes.

6.9.3.2 Fixed node addressing

With fixed node addressing a node is addressed via the so-called Configured Station Alias. This address can be configured by the network master in the Slave Information Interface (SII).

There is also the option of configuring the module address by writing to the EtherCAT® module identifier.

The advantage of fixed node addressing over auto-increment addressing lies in the fact that the nodes can still be addressed at the same address even after the network topology has been changed or after nodes have been added or removed.

The factory setting for the module address of the valve/pump electronics is 0.

It is also possible to configure the module address via service interface X10.

 The module address of the valve/pump electronics can also be altered with the Moog Valve Configuration Software.

6.9.4 EtherCAT® transmission rate

EtherCAT® works with a fixed transmission rate of 100 Mbit/s.

**EtherCAT®-DP
transmission rate**

6.10 Wiring analog inputs (X5, X6, X7)

The supply voltage for powering the transducers is available at pin 1.

**Maximum current
of transducer supply**

- i** There is joint fusing of this power supply for X2, X5, X6 and X7. The total supply current must therefore not exceed the following value:
 $I_{\max} (X2+X5+X6+X7) = 300 \text{ mA}$

An external power supply to the transducer is also possible. However, the 0 V transducer supply must be connected to supply zero. An interruption of the transducer supply current can be identified as a cable break (see "Firmware" User Manual).


The supply voltage is cut off in the event of a possible short circuit in the supply voltage to the transducer. A fault reaction can be configured (see "Firmware" User Manual). The voltage is available again as soon as the short circuit has been eliminated.

The supply current for each transducer is monitored for the purpose of detecting cable breaks. Supply currents under 1 mA can trigger a configurable fault reaction.

2/3/4-wire transducers with a voltage or current output can be connected to X5, X6 and X7. Each input can be individually adapted.

6.10.1 2-wire transducers

2-wire transducers can only be operated in the signal type for the 0–10 mA or 4–20 mA analog input in the single-ended version.

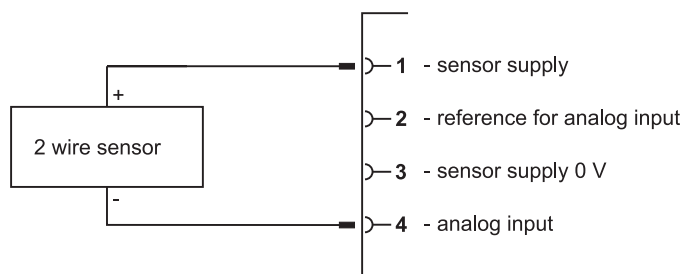


**Wiring the 2-wire
transducer**

Figure 40: Connecting a 2-wire transducer to analog input connectors X5, X6 or X7

6.10.2 3-wire transducers

3-wire transducers can only be operated in the single-ended version.

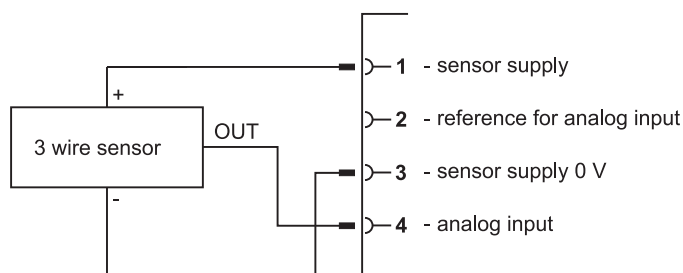


**Wiring the 3-wire
transducer**

Figure 41: Connecting a 3-wire transducer to analog input connectors X5, X6 or X7

6.10.3 4-wire transducers

4-wire transducers should be operated in the differential version.

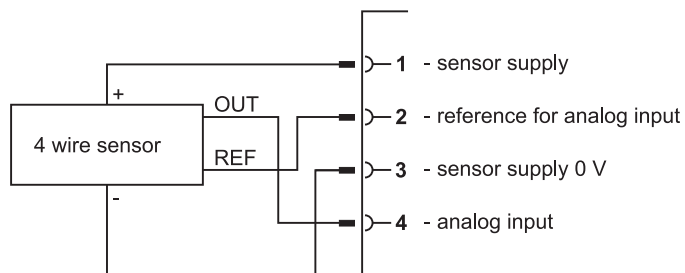

Wiring the 4-wire transducer

Figure 42: Connecting a 4-wire transducer to analog input connectors X5, X6 or X7

For your notes.

7 Starting-up

CAUTION



Dirt or moisture can get into the valve/pump electronics through unplugged connectors, i.e., if a mating connector is not inserted, which may result in the valve or the pump being damaged.

Unplugged connectors must be covered and sealed.

The plastic dust protection caps which are attached to service connectors X5, X6, X7 and X10 on delivery are suitable for use as sealing covers.

The plastic dust protection caps which are attached to field bus connectors X3 and X4 on delivery are not suitable for use as sealing covers.

Suitable metallic dust protection caps for field bus connectors X3 and X4 are available as accessories.

⇒ Chapter "9.2 Accessories", page 84

Cover unplugged connectors with dust protection caps

7.1 Electromagnetic compatibility (EMC)

The machine manufacturer is responsible for complying with the EMC Directive.

EMC requirements

The valves/pumps satisfy the EMC protection requirements for interference immunity as per [DIN EN 61000-6-2](#) (evaluation criterion A) and for emitted interference as per [DIN EN 61000-6-4](#) (CAN bus and Profibus-DP) or as per [DIN EN 61000-6-3](#) (EtherCAT®).

The following technical requirements must be in place so that the EMC protection requirements can be satisfied:

- Use of the mating connectors recommended for the valves/pumps.
⇒ Chapter "9.2 Accessories", page 84
- Adequate shielding.
- Correct execution of equipotential bonding system, protective grounding and electrical shielding.
⇒ Chapter "6.2 Protective grounding and electrical shielding", page 48

7.2 Communication via the Moog Valve Configuration Software

WARNING



For safety reasons, the Moog Valve Configuration Software must not be used inside a machine for visualization purposes or as an operator terminal.

WARNING



It is only permitted to activate valves/pumps via the Moog Valve Configuration Software if this does not cause any dangerous states in the machine and in its surroundings. It is not permitted to operate the Moog Valve Configuration Software on a field bus while the field bus is communicating with the machine.

CAUTION



Activating valves/pumps via the Moog Valve Configuration Software within a CAN network can give rise to unforeseeable events if field bus communication takes place simultaneously between the machine controller or to other CAN nodes!

CAUTION  If completely safe operation of the valves/pumps via the Moog Valve Configuration Software cannot be guaranteed even with deactivated field bus communication with the machine controller and other CAN nodes, the valves/pumps are only permitted to communicate in a depressurized state and in a direct link (point-to-point) with the software.

CAUTION  CAN telegrams of the Moog Valve Configuration Software can also be received by other CAN bus nodes. This may trigger off unforeseeable events!

CAUTION  Data exchange with the valve/pump electronics may be disrupted if other bus nodes (e.g., a controller) simultaneously access the device.

The Moog Valve Configuration Software communicates with the valves/pumps via the CAN interface. The CAN interface is available either in service interface X10, in LocalCAN interface X2 or in CAN field bus interface X3 and X4.

If the Moog Valve Configuration Software is operated within a CAN network with field bus communication of the machine running, the following faults can occur:

- Data exchange with the valves/pumps may be disrupted if another device (e.g., a controller) simultaneously accesses the valves/pumps.
- Node guarding may be activated only if no other field bus node is monitoring the valves/pumps via this service.
- Field bus telegrams can also be received by other field bus nodes. This may trigger off unforeseeable events!

To establish a direct connection between Moog Valve Configuration Software and valve, detach the field bus cable from the valve and connect the valve directly to the USB CAN interface of the service PC. A $120\ \Omega \pm 10\ \%$ terminal resistor is required here.

The configuration/starting-up cable not included in the scope of delivery already features a terminal resistor.

⇒ [Chapter "9.2 Accessories", page 84](#)

Operation of the Moog Valve Configuration Software

Possible faults

8 Trouble shooting

8.1 Communication problems in networks

-  If the fault cannot be corrected by means of the measures set out below, please contact Moog or one of its authorized service outlets.
-  Field bus diagnostic tools allow you to monitor data traffic on the field bus, making it easier to identify the causes of problems.

8.1.1 General trouble shooting

8.1.1.1 LED «MS» not shining

Measures:

General trouble shooting

- Check the status LEDs.
⇒ [Chapter "5 Status display", page 41](#)
- Check the cable connection on connector X1 for secure seating and damage.
Check the 24V power supply.
Typical fault causes:
 - Open circuit
 - Corroded, loose, incorrectly seated or missing connectors
 - Valve/pump has no supply voltage
 ⇒ [Chapter "6.4 Wiring connector X1", page 59](#)

8.1.2 Trouble shooting CANopen

8.1.2.1 No or disrupted communication

Measures:

Trouble shooting CANopen

- Check the status LEDs.
⇒ [Chapter "5 Status display", page 41](#)
- Check the field bus cable and connections on connectors X3 and X4 for secure seating and damage.
Check the 24V power supply.
Check the field bus topology.
Typical fault causes:
 - Absence of terminal resistors
 - Open circuit
 - Corroded, loose, incorrectly seated or missing connectors
 - Valve/pump has no supply voltage
 - Cables too long, unsuitable topology
 ⇒ [Chapter "6.7 Wiring CAN networks \(X2, X3, X4\)", page 64](#)
- Check the module address of the field bus nodes.
Each module address may only be used once within a field bus network.
⇒ [Chapter "6.7.3 CAN module address \(node ID\)", page 67](#)
- Check to make sure that the transmission rate of the field bus nodes matches the transmission rates of the other field bus nodes.
⇒ [Chapter "6.7.4 CAN transmission rate", page 67](#)

- Check the communication parameters of the valve software.
Typical fault causes:
 - NMT status is not set to 'OPERATIONAL' (only during process data transmission).
 - SDO CAN identifiers are not correctly set.
 - PDO CAN identifiers are not correctly set (only during process data transmission).
 - PDO mapping parameters are not correctly set (only during process data transmission).
-  Detailed information can be found in the "Firmware" User Manual.

8.1.3 Trouble shooting Profibus-DP

8.1.3.1 No or disrupted communication

Measures:

Trouble shooting Profibus-DP

- Check the status LEDs.
⇒ [Chapter "5 Status display", page 41](#)
 - Check the field bus cable and connections on connectors X3 and X4 for secure seating and damage.
Check the 24V power supply.
Check the field bus topology.
Typical fault causes:
 - Absence of terminal resistors
 - Open circuit
 - Corroded, loose, incorrectly seated or missing connectors
 - Valve/pump has no supply voltage
 - Cables too long, unsuitable topology
 ⇒ [Chapter "6.8 Wiring Profibus-DP networks \(X3, X4\)", page 68](#)
 - Check the module address of the field bus nodes.
Each module address may only be used once within a field bus network.
⇒ [Chapter "6.8.3 Profibus-DP module address \(node ID\)", page 70](#)
 - Check the communication parameters of the valve software.
 - Check for matching configuration telegrams.
 - Check the parameterization telegrams.
-  Detailed information can be found in the "Firmware" User Manual.

8.1.4 Trouble shooting EtherCAT®

The following lists possible fault causes sorted by network layers (lowest layer [hardware layer] first) followed by software configuration errors.

8.1.4.1 LED «NS» not shining, no communication

Measures:

- Check the field bus cable and connections on connectors X3 and X4 for secure seating and damage.
- Check the field bus topology.

Typical fault causes:

- Open circuit
- Corroded, loose, incorrectly seated or missing connectors

⇒ Chapter "6.9 Wiring EtherCAT® networks (X3, X4)", page 71

**Trouble shooting
EtherCAT®**

8.1.4.2 LED «NS» flashing/shining orange, no or disrupted communication

Measures:

- Check the status LEDs.
⇒ Chapter "5 Status display", page 41
- Check the module address of the field bus nodes.
⇒ Chapter "6.9.3 EtherCAT® module address (node ID)", page 73
- Check the communication parameters of the valve software and in the network master.

Typical fault causes:

- Missing or incorrect valve description file (XML Slave Description File) on the network master.

 Detailed information can be found in the "Firmware" User Manual.

8.1.4.3 LED «NS» flashing/shining, network status does not reach 'PRE-OPERATIONAL'

Measures:

- Check the error messages in the network master.
- Check the mailbox configuration.
- Check the network configuration in the master with regard to the field bus topology.

Typical fault causes:

- The field bus topology was altered without the configuration being adapted and restarted in the network master.
- The valve description file used (XML Slave Device Description File) does not suit the valve.

When using TwinCAT:

- Check the TwinCAT run time system.
- Check the TwinCAT system status.

Typical fault causes:

- The TwinCAT system manager has no connection to the TwinCAT run time system, run time system was not started.
- The configuration was altered, but the altered configuration has not yet been activated.

 Detailed information can be found in the "Firmware" User Manual.

8.1.4.4 LED «NS» flashing/shining orange, network status does not reach 'SAVE-OPERATIONAL' or 'OPERATIONAL'

Measure:

- Check the PDO configuration.

Typical fault causes:

- The number and/or size of the parameters allocated in the PDO configuration are not identical on the master and valve sides.

Solution:

Adjust the PDO configuration of the valve (SDO parameters 0x1600 and 0x1A00) with the valve description file (XML Slave Device Description File) on the master.

The factory setting of the valve corresponds to the configuration in the valve description file.

 Detailed information can be found in the "Firmware" User Manual.

9 Additional Documentation and Accessories

9.1 Additional documentation

Item designation	Comments	Order number
User information Series D636/D638, German D636/D638, English D941, German D941, English RKP-D, English	Product-specific user information Not included in the scope of delivery	CA45707-002 CA45707-001 CA43357-002 CA43357-002 CA58548-001
Firmware User Manual Digital Interface Valve (DIV) with CAN bus interface	User information "Firmware - Digital Interface Valves (DIV) with CAN Bus Interface" Not included in the scope of delivery	B99224-DVXXX-BE400 ¹
Firmware User Manual Digital Interface Valve (DIV) with Profibus-DP interface	User information "Firmware - Digital Interface Valves (DIV) with Profibus-DP Interface" Not included in the scope of delivery	B99225-DVXXX-BE400 ¹
Firmware User Manual Digital Interface Valve (DIV) with EtherCAT bus interface	User information "Firmware - Digital Interface Valves (DIV) with EtherCAT Bus Interface" Not included in the scope of delivery	B99226-DVXXX-BE400 ¹
Firmware User Manual Axis Control Valve (ACV) with CAN bus interface	User information "Firmware - Axis Control Valves (ACV) with CAN Bus Interface" Not included in the scope of delivery	B99224-DVXXX-DE400 ¹
Firmware User Manual Axis Control Valve (ACV) with Profibus-DP interface	User information "Firmware - Axis Control Valves (ACV) with Profibus-DP Interface" Not included in the scope of delivery	B99225-DVXXX-DE400 ¹
Firmware User Manual Radial Piston Pump (RKP-D) with CAN bus interface	User information "Firmware - Radial Piston Pump (RKP-D) with CAN Bus Interface" Not included in the scope of delivery	B99224-DVXXX-CE400 ¹

Table 27: Additional documentation

¹ XXX corresponds to firmware version, e.g., 010

9.2 Accessories

Item designation	Number required	Comments	Order number
Dust protection caps		Not included in the scope of delivery	
for field bus connector X3 with external thread	1	Metal cap with O-rings	C55823-001
for field bus connector X4 with internal thread	1	Metal cap with O-rings	CA24141-001
Mating connector 6+PE-pin (for connector X1)	1	Not included in the scope of delivery Watertight IP65 Usable cable with min. Ø 8 mm (0.315 in), max. Ø 12 mm (0.472 in)	B97007-061
Tool set for 6+PE-pin mating connector of valve connector X1	1	Crimping tool, tool insert, installation and removal tool	C2166-001
Tools for 6+PE-pin mating connector of valve connector X1	1	Crimping tool for mating connector	C21162-001
	1	Tool set for crimping tool for contact sizes 16 and 20	C21163-001
	1	Installation tool for contact sizes 16 and 20	C21164-001
	1	Removal tool for contact sizes 16 and 20	C21165-001
Mating connector 11+PE-pin (for connector X1)	1	Not included in the scope of delivery Watertight IP65 Usable cable with min. Ø 11.5 mm (0.453 in), max. Ø 13 mm (0.512 in)	B97067-111
Tool set for 11+PE-pin mating connector of valve connector X1	1	Crimping tool, tool insert, installation and removal tool	B97138-001
Tools for 11+PE-pin mating connector of valve connector X1	1	Crimping tool for mating connector	B97136-001
	1	Removal tool	B97137-001
Connection cable for valve connector X1, 3 m (9.843 ft)		Not included in the scope of delivery	
with 6+PE-pin mating connector	1		C21033-003-001
with 11+PE-pin mating connector	1		C21031-003-001
Configuration/starting-up software	1	Not included in the scope of delivery	on request
Configuration/starting-up cable, 2 m (6.562 ft)	1	Not included in the scope of delivery	TD3999-137
Adapter for service connector X10 (M8 to M12)	1	Not included in the scope of delivery	CA40934-001
USB starting-up module (for service connector X10)	1	Not included in the scope of delivery	C43094-001
SELV power pack (10 A, 24 V DC)	1	Not included in the scope of delivery	D137-003-001
Power supply cable, 2 m (6.562 ft)	1	Not included in the scope of delivery	B95924-002
Mating connector with connection cable for analog inputs X5, X6, X7		Not included in the scope of delivery Pin 1 brown (BN) Pin 2 white (WH) Pin 3 blue (BU) Pin 4 black (BK)	
L = 2 m (6.562 ft)	1		C72977-002
L = 5 m (16.404 ft)	1		C72977-005

Table 28: Accessories

A B C D E F G H I J K L M N O P Q R S T U V W X Y Z

10 Index

Numerics

- 2/2-way seat valve
 - block diagram of the plug connection • 38
 - connector X9 in the block diagram of the valve/pump electronics • 13
 - pin assignment, plug connection X9 • 38
 - power supply • 22
- 4/2-way seat valve, *see* 2/2-way seat valve

A

Abbreviations

- list of abbreviations • 93
- AC: Alternating Current
- CAN: Controller Area Network
- CD: Collision Detection
- CI A: CAN in Automation e. V.
- CSMA: Carrier Sense Multiple Access
- DIN: Deutsches Institut für Normung e. V.
- DIS: Draft International Standard (initial standard)
- DS: Draft Standard
- DSP: Draft Standard Proposal
- EIA: Electronic Industries Alliance
- EMC: Electromagnetic Compatibility
- EN: Europa-Norm (European standard)
- ESD: Electrostatic Discharge
- EtherCAT: Ethernet for Control Automation Technology
- EU: European Union
- GND: ground
- ID: identifier
- IEC: International Electrotechnical Commission
- IEEE: Institute of Electrical and Electronics Engineers, Inc.
- ISO: International Organization for Standardization
- LED: Light Emitting Diode
- LSS: Layer Setting Services
- LVDT: Linear Variable Differential Transformer (position transducer)
- MoVaCo: Moog Valve Configuration Software
- MS: Module Status LED
- NMT: Network Management
- NS: Network Status LED
- PC: Personal Computer
- PDO: Process Data Object
- PE: Protective Earth
- PELV: protective extra low voltage
- RKP-D: radial piston pump with digital control
- SDO: Service Data Object
- SELV: Safety Extra Low Voltage
- SHLD: shield
- SSI: Slave Information Interface

- TIA: Telecommunications Industry Association
- TN: Technical Note
- TÜV: Technischer Überwachungsverein
- USB: Universal Serial Bus
- VDE: Verband der Elektrotechnik Elektronik Informationstechnik e. V.
- VDI: Verein Deutscher Ingenieure e. V.
- VDMA: Verband Deutscher Maschinen- und Anlagenbau e. V.
- XML: extensible markup language
- AC: abbreviation for Alternating Current
- Accessories
 - adapter for service connector X10 • 84
 - cable for starting-up • 84
 - dust protection caps • 84
 - USB starting-up module • 84
- Acronyms • 93
- Address of Moog GmbH • A
- Allocation of interfaces to connectors • 14
- Analog input connector, *see* Connectors X5...X7

B

- Block diagram of the valve/pump electronics • 13

C

- C_{typ}
 - symbol for typical capacitance
 - typical capacitance • 54
- Cable for starting-up • 84
- Cables
 - cable length in CAN networks • 66
 - cable length in Profibus-DP networks • 69
 - cable routing inside machines • 54
 - calculation
 - maximum length • 55
 - typical capacitance C_{typ} • 54
 - typical resistance R_{typ} • 54
 - voltage drop per unit length • 55
 - dimensioning • 54
 - permissible lengths • 54–58
 - pin assignment for EtherCAT networks • 72
 - requirements • 51
 - suitable cables for
 - CAN networks • 66
 - EtherCAT networks • 72
 - Profibus-DP networks • 69
- CAN
 - abbreviation for Controller Area Network
 - literature, additional, CAN fundamentals • 95

A B C D E F G H I J K L M N O P Q R S T U V W X Y Z

A B C D E F G H I J K L M N O P Q R S T U V W X Y Z

- CAN bus
 - general information • 15
 - indication of network status • 42
 - LED • 42
 - pin assignment • 32
 - technical data • 31
- CAN networks
 - cable cross section • 66
 - cable length • 66
 - interference immunity • 65
 - module address • 67
 - number of bus nodes • 67
 - suitable cables • 66
 - transmission rate • 67
 - trouble shooting • 79
 - wiring • 64–67
 - procedure • 64
 - wiring diagram • 65
- CD: abbreviation for Collision Detection
- CiA
 - abbreviation for CAN in Automation Nutzervereinigung e.V.
 - quoted CiA standards • 94, 96
- Clock pulse output (signal of SSI transducer) • 28
- Command signal U_{command} of input voltage • 60
- Command signals, single-ended • 60
- Compatibility, electromagnetic, *see* EMC
- Completeness of the user information • 2
- Configuration cable
 - ordering information • 84
- Configuration software,
 - see* Moog Valve Configuration Software
- Connector
 - dust protection caps
 - safety instructions • 10, 47, 77
 - in the block diagram of the valve/pump electronics • 13
 - list of interfaces • 14
 - X1 (connector)
 - in the block diagram of the valve/pump electronics • 13
 - mating connector, ordering information • 84
 - pin assignment • 19
 - X2 (digital signal interface)
 - in the block diagram of the valve/pump electronics • 13
 - X3 and X4 (field bus connectors)
 - dust protection caps • 10, 47, 77
 - in the block diagram of the valve/pump electronics • 13
 - X5...X7 (analog input connectors)
 - in the block diagram of the valve/pump electronics • 13
 - X8 (external LVDT connector)
 - in the block diagram of the valve/pump electronics • 13
 - X9 (2/2-way seat valve connector)
 - in the block diagram of the valve/pump electronics • 13
 - X10 (service connector)
 - in the block diagram of the valve/pump electronics • 13
 - dust protection caps • 10, 47, 77
 - X11 (pilot valve connector)
 - in the block diagram of the valve/pump electronics • 13
- Connector X1 • 19
 - in the block diagram of the valve/pump electronics • 13
 - pin assignment • 19
 - 6+PE-pin connector • 19
 - 11+PE-pin connector (variant p/Q, pump) • 21
 - 11+PE-pin connector (variant Q) • 20
 - versions • 19
 - wiring
 - 6+PE-pin connector • 59
 - 11+PE-pin connector • 59
- Connector X2
 - see also* Signal interface, digital signal interface X2
 - in the block diagram of the valve/pump electronics • 13
 - pin assignment • 26, 28, 30–31
 - wiring CAN networks • 64–67
 - cable length and cable cross section • 66
 - interference immunity • 65
 - procedure • 64
 - wiring diagram • 65
 - wiring incremental transducers • 62–63
 - wiring SSI transducers • 63–64
- Connector X8
 - in the block diagram of the valve/pump electronics • 13
 - pin assignment • 38
- Connector X9
 - in the block diagram of the valve/pump electronics • 13
- Connectors X3 and X4
 - see also* Field bus connectors X3 and X4
 - dust protection caps
 - ordering information • 84
 - in the block diagram of the valve/pump electronics • 13
 - pin assignment • 32–34
 - wiring CAN networks • 64–67
 - cable length and cable cross section • 66
 - interference immunity • 65
 - procedure • 64
 - wiring diagram • 65
 - wiring EtherCAT networks • 71–73
 - procedure • 71
 - wiring diagram • 71
 - wiring Profibus-DP networks • 68–70
 - cable length and cable cross section • 69
 - procedure • 68
 - wiring diagram • 68
- Connectors X5...X7
 - in the block diagram of the valve/pump electronics • 13
 - pin assignment • 35

A B C D E F G H I J K L M N O P Q R S T U V W X Y Z

A B C D E F G H I J K L M N O P Q R S T U V W X Y Z

Connector X10
 adapter for service connector
 ordering information • 84
 in the block diagram of the valve/pump
 electronics • 13
 pin assignment • 39
 USB starting-up module
 ordering information • 84
see also Service connector X10
 Connector X11 • 39
 in the block diagram of the valve/pump
 electronics • 13
 pin assignment • 39
 Conversion of actual value output signals
 I_{out} (4–20 mA) into 2–10 V • 61
 Copyright of the user information • A
 Counting pulse (signal of incremental
 transducer) • 26
 CSMA: abbreviation for Carrier Sense
 Multiple Access
 Current command signal $I_{command}$ • 60

D

DIN: abbreviation for Deutsches Institut für
 Normung e. V.
 DIS: abbreviation for Draft International
 Standard
 Documentation, additional • 2
 ordering information • 83
 DS: abbreviation for Draft Standard
 DSP: abbreviation for Draft Standard
 Proposal
 Dust protection caps
 for field bus connectors X3 and X4 • 10,
 47, 77
 for service connector X10 • 10, 47, 77
 ordering information • 84

E

EIA: abbreviation for Electronic Industries
 Alliance
 Electrical shielding • 48, 51–54
 connecting the shield • 52
 connection with cable leadthrough • 52
 connection with plug connection • 52
 insulated shielding • 53
 requirement of cable routing • 54
 requirement of lines • 51
 Electromagnetic compatibility, *see* EMC
 EMC
 abbreviation for Electromagnetic
 Compatibility
 EMC-compliant SELV/PELV power
 pack • 9, 22, 48
 requirements during starting-up • 77
 EN: abbreviation for Europa-Norm
 (European standard)

Equipotential bonding
 deficient equipotential bonding • 51
 electrical shielding • 51
 ground loops • 51
 insulated shielding in the event of
 deficient equipotential bonding • 53
 maximum potential difference (7 V) • 50
 of machines • 49
 performance • 50
 protective conductor • 50
 cross section • 50
 ESD • 9
 abbreviation for Electrostatic Discharge
 EtherCAT
 abbreviation for Ethernet for Control
 Automation Technology
 general information • 16
 indication of network status • 44
 LED (status) • 44
 literature, additional, EtherCAT
 fundamentals • 95
 maximum number of bus nodes • 33
 module address • 73
 auto-increment addressing • 73
 fixed node addressing • 73
 pin assignment for EtherCAT networks •
 72
 pin assignment, connector X3 • 34
 suitable cables for EtherCAT networks •
 72
 technical data • 33
 transmission rate • 73
 trouble shooting in EtherCAT networks •
 81
 wiring diagram, EtherCAT networks • 71
 wiring EtherCAT networks • 71–73
 procedure • 71
 EtherCAT interface, *see* EtherCAT
 EtherCAT network, *see* EtherCAT
 EU: abbreviation for European Union
 External LVDT connector X8
 in the block diagram of the valve/pump
 electronics • 13
 pin assignment • 38

F

f_l
 limit frequency • 57
 symbol for limit frequency
 Fault
 CAN networks
 disrupted communication • 79
 no communication • 79
 EtherCAT networks
 LED «NS» lit orange • 81–82
 LED «NS» not lit • 81
 network status not
 'PRE-OPERATIONAL' • 82
 network status not
 'SAVE-OPERATIONAL' or
 'OPERATIONAL' • 82
 no communication • 81

A B C D E F G H I J K L M N O P Q R S T U V W X Y Z

A B C D E F G H I J K L M N O P Q R S T U V W X Y Z

general
 LED «MS» not lit • 79
 Profibus-DP networks
 disrupted communication • 80
 no communication • 80
 Field bus
 connection of the valve/pump
 safety instructions • 9
 Field bus connectors X3 and X4
 CAN bus connectors • 32
 dust protection caps • 10, 47, 77
 EtherCAT connectors • 34
 general information • 15
 in the block diagram of the valve/pump
 electronics • 13
 Profibus-DP connectors • 33
 versions of the connectors • 31
 see also Connectors X3 and X4
 Field bus interface, see Field bus
 connectors X3 and X4

G

GND
 abbreviation for Ground
 ground contact of connector X1 • 19–21
 Ground (electrical)
 abbreviation: GND
 ground contact (GND) of connector X1 • 19–21
 single-ended command signals • 60
 single-ended connection of the analog
 command inputs • 60
 Ground connection of connector X1 • 19–21
 Ground contact (GND) of connector X1 • 19–21

H

Handling in accordance with safety
 requirements • 7

I

I_{command}
 current command signal • 60
 symbol for current command signal
 I_{in} : symbol for input current
 I_{max} : symbol for maximum current
 I_{out}
 output current • 61
 symbol for output current
 I_{supply}
 supply current • 60
 symbol for supply current
 ID: abbreviation for Identifier
 IEC: abbreviation for International
 Electrotechnical Commission
 IEEE: abbreviation for Institute of Electrical
 and Electronics Engineers, Inc.

Incremental transducer
 see also Connector X2
 cable break monitoring • 27
 connection designations for transducers
 of different manufacturers • 63
 connection to valve/pump • 62
 pin assignment • 26
 power supply • 27
 recommended cable types • 27
 reversal point of signals • 62
 speed variation of signals • 62
 supported transducer types • 27
 wiring • 62–63
 wiring diagram • 62

Initial starting-up, safety instructions • 9

Input resistances at connectors X5...X7 • 37

Input voltage U_{in} • 60

Inputs, analog inputs

at connectors X5...X7

± 10 V • 36

0–10 mA • 36

0–10 V • 36

4–20 mA • 37

benefits of the different signal types • 48

connections • 14

in the block diagram of the valve/pump
 electronics • 13

maximum current for transducer supply • 74

on connector X1 • 19–21

± 10 mA • 23

± 10 V • 23

0–10 mA • 24

0–10 V • 23

4–20 mA • 24

overview of connections • 14

pin assignment X5...X7 • 35

power supply to the transducer • 35

signal types

at connectors X5...X7 • 36

evaluating the signal types • 48

on connector X1 • 23

single-ended connection • 60

wiring • 74–75

2-wire transducer • 74

3-wire transducer • 74

4-wire transducer • 75

connectors X5...X7 • 74–75

Inputs, digital inputs

on connector X1

release signal • 25

overview of connections • 14

release signal • 19–21

in the block diagram of the
 valve/pump electronics • 13

Intended operation • 4

ISO: abbreviation for International
 Organization for Standardization

A B C D E F G H I J K L M N O P Q R S T U V W X Y Z

A B C D E F G H I J K L M N O P Q R S T U V W X Y Z

L

- $I_{\max}$
 - maximum length of the supply cable • 55
 - symbol for maximum length
- LED
 - abbreviation for Light Emitting Diode
 - indication of device status • 41
 - indication of network status for CAN bus • 42
 - indication of network status for EtherCAT • 44
 - indication of network status for Profibus • 43
 - status LEDs
 - in the block diagram of the valve/pump electronics • 13
- Light emitting diodes (LEDs), *see* LED
- List of Figures • viii
- List of Tables • vii
- Literature, additional
 - CAN fundamentals • 95
 - EtherCAT fundamentals • 95
 - Moog publications • 96
 - Profibus fundamentals • 95
 - standards, quoted • 96–97
- Load impedance R_L
 - analog actual value outputs • 61
- LocalCAN
 - see also* Connector X2
 - maximum number of bus nodes • 29
 - pin assignment • 30–31
 - power supply to the transducer • 30
 - technical data • 29
- LSS
 - abbreviation for Layer Setting Services
- LVDT (position transducer)
 - abbreviation for Linear Variable Differential Transducer (position transducer)
 - see also* Position transducer
 - general information • 17
 - in the block diagram of the valve/pump electronics • 13

M

- Manufacturer's address • A
- Mating connector
 - for connector X1, ordering information • 84
- Module status LED • 41
- Moog Valve Configuration Software
 - operation • 78
 - possible faults • 78
 - safety instructions • 11–78
- MoVaCo: abbreviation for Moog Valve Configuration Software
- MS: abbreviation for Module Status

N

- n: abbreviation for number
- NMT: abbreviation for Network Management
- NS: abbreviation for Network Status

O

- Occupational safety and health
 - safe distances for cardiac pacemakers and similar devices due to magnetic fields • 8
 - safety equipment • 8
 - sound insulation measures • 8
- Operation of the valves/pumps, intended operation • 4
- Order numbers
 - accessories • 84
 - additional documentation • 83
- Ordering information, *see* Order numbers
- Output current I_{out} • 61
- Output voltage U_{out} • 61
- Outputs, analog actual value outputs
 - conversion of I_{out} (4–20 mA) into 2–10 V • 61
- Outputs, analog outputs
 - connections • 14
 - in the block diagram of the valve/pump electronics • 13
 - on connector X1 • 19–21
 - 2–10 V • 25
 - 4–20 mA • 25
 - overview of connections • 14
- Outputs, digital outputs
 - on connector X1 • 20–21
 - valve ready and monitoring • 25
 - overview of connections • 14

P

- p: symbol for pressure
- PC: abbreviation for Personal Computer
- PDO: abbreviation for Process Data Object
- PE
 - abbreviation for Protective Earth
 - protective conductor contact of connector X1 • 19–21
- Pilot valve connector X11
 - general information • 17
 - in the block diagram of the valve/pump electronics • 13
 - pin assignment • 39
- Pin assignment
 - X1 (connector)
 - 6+PE-pin • 19
 - 11+PE-pin, variant p/Q, pump • 21
 - 11+PE-pin, variant Q • 20
 - X2 (digital signal interface)
 - incremental transducer • 26
 - LocalCAN interface • 30–31
 - SSI transducer • 28

A B C D E F G H I J K L M N O P Q R S T U V W X Y Z

A B C D E F G H I J K L M N O P Q R S T U V W X Y Z

X3 and X4 (field bus interface)
 CAN bus • 32
 EtherCAT • 34
 Profibus-DP • 33
 X5...X7 (analog input connectors) • 35
 X8 (external LVDT connector) • 38
 X9 (2/2-way seat valve connector) • 38
 X10 (service connector) • 39
 X11 (pilot valve connector) • 39
 Position transducer (LVDT)
 abbreviation: LVDT (Linear Variable
 Differential Transducer)
 in the block diagram of the valve/pump
 electronics • 13
 Power pack, see SELV power pack
 Power supply
 4/2- or 2/2-way seat valve • 22
 for fail-safe valves • 20–21
 connection via connector X1 • 19–21
 requirements of supply voltage • 22
 SELV/PELV power pack • 9, 22, 48
 Problem elimination, see Trouble shooting
 Procedure for electrically connecting
 valves/pumps • 47
 Profibus
 literature, additional, Profibus
 fundamentals • 95
 Profibus-DP
 indication of network status • 43
 LEDs • 43
 maximum number of bus nodes • 32
 pin assignment • 33
 technical data • 32
 Profibus-DP interface
 general information • 16
 Profibus-DP networks
 cable cross section • 69
 cable length • 69
 module address • 70
 suitable cables • 69
 transmission rate • 70
 trouble shooting • 80
 wiring • 68–70
 procedure • 68
 wiring diagram • 68
 Prohibition to duplicate/reproduce - user
 information • A
 Protective conductor
 deficient equipotential bonding • 51
 ground loops • 51
 maximum potential difference (7 V) • 50
 procedure for connecting • 50
 required cross section • 50
 Protective conductor contact PE of
 connector X1 • 19–21
 Protective earth, Abbreviation: PE
 Protective grounding • 48–54
 of connector X1 • 19–21
 of machines • 49
 performance • 50

Q

Q: symbol for flow
 q_{typ}
 symbol for typical cross section
 typical cross section • 54
 Qualification, requirements of the user • 5

R

R: symbol for resistance
 ρ_{Cu}
 resistivity of copper • 54
 symbol for resistivity of copper
 R_L
 load impedance R_L of the analog actual
 value outputs • 61
 symbol for load impedance
 R_{typ}
 symbol for typical resistance
 typical resistance • 54
 Release date of the user information • 1
 Release signal, see Inputs, digital
 inputs: release signal
 RKP-D: abbreviation for radial piston pump
 with digital control

S

Safe distances for cardiac pacemakers and
 similar devices due to magnetic fields • 8
 Safety extra-low voltage
 abbreviation: PELV
 (Protective Extra Low Voltage)
 abbreviation: SELV
 (Safety Extra Low Voltage)
 see also SELV power pack
 Safety instructions
 general safety instructions • 8
 burns • 8
 dust protection caps for connectors • 10,
 47, 77
 electrical properties • 10
 equipotential bonding • 10
 ESD • 9
 handling in accordance with safety
 requirements • 7
 hydraulic fluid • 8
 initial starting-up • 9
 connection to field bus • 9
 installation • 9–11
 intended operation • 4
 isolation from the mains system • 9, 22,
 48
 maintenance • 9–11
 Moog Valve Configuration Software •
 11–78

A B C D E F G H I J K L M N O P Q R S T U V W X Y Z

A B C D E F G H I J K L M N O P Q R S T U V W X Y Z

- occupational safety and health
 - safe distances for cardiac pacemakers and similar devices due to magnetic fields • 8
 - safety equipment • 8
 - sound insulation measures • 8
- open connectors • 10, 47, 77
- power pack • 9, 22, 48
- protective conductor system • 10
- repair • 9–11
- selection and qualification of personnel • 5, 8
- symbols, used • 3
- technical data • 8
- trouble shooting • 9–11
- typographical conventions • 3
- use, intended • 4
- Safety shoes • 8
- SDO: abbreviation for Service Data Object
- Seat valve, *see* 2/2-way seat valve
- Selection and qualification of personnel • 5
 - qualified users • 5
- SELV power pack • 9, 22, 48
 - ordering information • 84
- Sensor supply
 - supply voltage to the incremental transducer • 26
 - supply voltage to the SSI transducer • 28
- Service connector X10
 - dust protection cap • 10, 47, 77
 - general information • 17
 - in the block diagram of the valve/pump electronics • 13
 - pin assignment • 39
 - see also* Connector X10
- Service interface
 - see* Service connector X10
- SHLD: abbreviation for Shield
- Signal cables
 - cable length • 58
 - calculation
 - limit frequency • 57
 - typical capacitance C_{typ} • 54
 - typical resistance R_{typ} • 54
 - dimensioning • 54
 - influence of capacitance per unit length • 57
 - influence of resistance • 56
 - limit frequency • 57
 - permissible lengths • 54–58
 - recommendations • 57
- Signal interface, digital signal interface X2
 - in the block diagram of the valve/pump electronics • 13
- incremental transducer • 26
- LocalCAN • 29–31
- SSI transducer • 28
- see also* Connector X2
- Signal zero of connector X1 • 19
- Signal, differential signal
 - evaluation • 48
- SII: abbreviation for Slave Information Interface
- Sound insulation measures • 8
- SSI transducer
 - see also* Connector X2
 - cable break monitoring • 29
 - connection to valve/pump • 63
 - pin assignment • 28
 - power supply • 29
 - recommended cable types • 28
 - signals between valve/pump • 63
 - supported transducer types • 28
 - wiring • 63–64
 - wiring diagram • 63
- Standards
 - CiA DSP • 96
 - DIN EN • 96
 - DIN EN ISO • 97
 - IEC • 97
 - IEEE • 97
 - ISO/DIS • 97
 - ISO/IEC • 97
 - overview of quoted standards • 96–97
- Starting-up • 77
 - EMC requirements • 77
 - starting-up cable • 84
- Starting-up and configuration software, *see* Moog Valve Configuration Software
- Status LEDs, *see* LED
- Storage, documentation • 2
- Styles/spelling, used • 3
- Subject to change without notice - user information • A, 1
- Supply cables
 - calculation
 - maximum length • 55
 - typical capacitance C_{typ} • 54
 - typical resistance R_{typ} • 54
 - voltage drop per unit length • 55
 - dimensioning • 54
 - permissible lengths • 54–58
- Supply current I_{supply} • 60
- Supply voltage
 - see also* Power supply
 - in the block diagram of the valve/pump electronics • 13
- Supply zero of connector X1 • 19
- Symbols
 - list of symbols • 93
 - C_{typ} (typical capacitance)
 - f_l (limit frequency)
 - $I_{command}$ (current command signal)
 - I_{in} (input current)
 - I_{max} (maximum current)
 - I_{out} (output current)
 - I_{supply} (supply current)
 - l (length)
 - l_{max} (maximum length)
 - n (number)
 - p (pressure)
 - Q (flow)
 - q_{typ} (typical cross section)
 - R (resistance)
 - ρ_{Cu} (resistivity of copper)
 - R_L (load impedance)
 - R_{typ} (typical resistance)
 - U_{cable} (voltage drop on supply cable)
 - $U_{command}$ (input voltage command signal)

A B C D E F G H I J K L M N O P Q R S T U V W X Y Z

A B C D E F G H I J K L M N O P Q R S T U V W X Y Z

U_{dr_max} (maximum voltage drop on supply cable)
 U_{in} (input voltage)
 U_{min} (minimum supply voltage)
 U_{out} (output voltage)
 Symbols, used • 3

T

Table of Contents • i
 TIA: abbreviation for Telecommunications Industry Association
 TN: abbreviation for Technical Note
 Tools
 for mating connector of connector X1, ordering information • 84
 required for wiring valves/pumps • 47
 Trademarks • 5
 Transceiver
 signal of LocalCAN connector X2 (3-pin) • 31
 signal of LocalCAN connector X2 (5-pin) • 30
 Trouble shooting • 79–82
 TÜV: abbreviation for Technischer Überwachungsverein (German Technical Inspection Agency)
 Typographical conventions • 3

U

U_{cable}
 symbol for voltage drop on the cable
 voltage drop on the cable • 60
 $U_{command}$
 command signal of input voltage • 60
 symbol for input voltage command signal
 U_{dr_max}
 maximum voltage drop on the cable • 55
 symbol for maximum voltage drop on supply cable
 U_{min}
 minimum supply voltage • 55
 symbol for minimum supply voltage
 U_{out}
 output voltage • 61
 symbol for output voltage
 U_{in}
 input voltage • 60
 symbol for input voltage
 Unplugged connectors
 safety instructions • 10, 47, 77
 USB: abbreviation for Universal Serial Bus
 Use, intended • 4
 User information
 completeness • 2
 copyright • A
 prohibition to reproduce/duplicate • A
 release date • 1
 storage location • 2
 styles/spelling, used • 3
 subject to change without notice • A, 1

symbols, used • 3
 typographical conventions • 3
 version number • 1
 Users, qualified • 5

V

Valve description file • 81–82
 Valve/pump electronics, block diagram • 13
 VDE: abbreviation for Verband der Elektrotechnik Elektronik Informationstechnik e. V. (German Association of Electrical Engineering, Electronics and Information Technology)
 VDI: abbreviation for Verein Deutscher Ingenieure e. V. (Association of German Engineers)
 VDMA: abbreviation for Verband Deutscher Maschinen- und Anlagenbau e. V. (German Machinery and Plant Manufacturers' Association)
 Version number of the user information • 1
 Voltage drop U_{cable} on the cable • 60

W

Wiring
 tools and materials required • 47
 X1
 6+PE-pin connector • 59
 11+PE-pin connector • 59
 X2
 CAN network • 64
 incremental transducer • 62
 SSI transducer • 63
 X3 and X4
 CAN network • 64
 EtherCAT network • 71
 Profibus-DP network • 68
 X5...X7 • 74
 2-wire transducer • 74
 3-wire transducer • 74
 4-wire transducer • 75
 Work gloves • 8

X

X1, X2, ..., X11, see Connector
 XML
 abbreviation for Extensible Markup Language
 XML Slave Device Description File • 81–82

Z

Zero pulse (signal of incremental transducer) • 26

A B C D E F G H I J K L M N O P Q R S T U V W X Y Z

11 Appendix

11.1 Abbreviations, symbols, specialist terms

Abb.	Explanation
6+PE	6-pin connector with protective conductor contact
11+PE	11-pin connector with protective conductor contact
A	Pin of 6+PE-pin valve connector X1
B	Pin of 6+PE-pin valve connector X1
C	Pin of 6+PE-pin valve connector X1
AC	A lternating C urrent
CAN	C ontroller A rea N etwork
CAN_GND	CAN Ground (ground of CAN connectors X3 and X4)
CAN_H	CAN High (CAN bus signal (dominant high))
CAN_L	CAN Low (CAN bus signal (dominant low))
CAN_SHLD	CAN Shield (shield of CAN connectors X3 and X4)
CAN_V+	Supply voltage for CAN bus nodes
CANopen	Standardized communication profile
CAT 5	Category for twisted-pair cables (standardized in ANSI/TIA/EIA-568-B.1-2001)
CD	C ollision D etection
CiA	CAN in A utomation e. V. (International Manufacturers' and Users' Organization for CAN Users; http://www.can-cia.org)
CSMA	C arrier S ense M ultiple A ccess
C_{typ}	Symbol for typical capacitance
D	Pin of 6+PE-pin valve connector X1
DC	D irect C urrent
DIN	D eutsches I nstitut für N ormung e. V. (German Institute for Standardization)(http://www.din.de)
DIS	D raft I nternational S tandard (initial standard)
DS	D raft S tandard
DSP	D raft S tandard P roposal
E	Pin of 6+PE-pin valve connector X1
EIA	E lectronic I ndustries A lliance (http://www.eia.org)
EMC	E lectromagnetic C ompatibility
EN	E uropa- N orm (European standard)
ESD	E lectrostatic D ischarge
EtherCAT®	E thernet for C ontrol A utomation T echnology
EU	E uropean U nion
F	Pin of 6+PE-pin valve connector X1
f_l	Symbol for limit frequency
GND	G round
ID	I dentifier
IEC	I nternational E lectrotechnical C ommission (http://www.iec.ch)
IEEE	I nstitute of E lectrical and E lectronics E ngineers, Inc. (http://www.ieee.org)
I_{in}	Symbol for input current
I_{max}	Symbol for maximum current
I_{out}	Symbol for output current
I_{command}	Symbol for current command signal
I_{supply}	Symbol for supply current

Tab. 29: Abbreviations, symbols, specialist terms

Table 29: Abbreviations, symbols, specialist terms (part 1 of 3)

Abb.	Explanation
ISO	International Organization for Standardization (http://www.iso.org)
LED	Light Emitting Diode
$l_{\max}$	Symbol for maximum length
LSB	Least Significant Bit (lowest-value bit)
LSS	Layer Setting Services as per CiA DSP 305 (LSS offers the option of setting the node parameters, such as e.g., module address or baud rate, of a CAN node via the CAN bus)
LVDT	Linear Variable Differential Transformer (position transducer; senses the position of the spool in the valve)
MoVaCo	Moog Valve Configuration Software
MS	Module State LED
MSB	Most Significant Bit (highest-value bit)
n	Number
NMT	Network Management (for configuration, initialization and fault handling in CAN networks)
Node	Node in a network
NS	Network State LED
P	Symbol for pressure
PC	Personal Computer
PDO	Process Data Object (message object which contains cyclic process data)
PE	Protective Earth
PE	Pin of 6 or 11+PE-pin valve connector X1
PELV	Protective Extra Low Voltage
Q	Symbol for flow
q_{typ}	Symbol for typical cross section
Repeater	Signal amplifier for bus communication
ρ_{Cu}	Symbol for resistivity of copper
R	Symbol for resistance
RKP-D	Radial piston pump with digital control
R_L	Symbol for load impedance
R_{typ}	Symbol for typical resistance
SELV	Safety Extra Low Voltage
SDO	Service Data Object (for communicating service data)
SHLD	Shield
SII	Slave Information Interface
TIA	Telecommunications Industry Association (http://www.tiaonline.org)
TN	Technical Note
TÜV	Technischer Überwachungsverein (German Technical Inspection Agency)
$U_{\text{dr_max}}$	Symbol for maximum voltage drop on the supply cable
U_{in}	Symbol for input voltage
U_{cable}	Symbol for voltage drop on the cable
U_{min}	Symbol for minimum supply voltage
U_{out}	Symbol for output voltage
U_{command}	Symbol for input voltage command signal
USB	Universal Serial Bus

Tab. 29: Abbreviations, symbols, specialist terms

Table 29: Abbreviations, symbols, specialist terms (part 2 of 3)

Abb.	Explanation
VDE	Verband der Elektrotechnik Elektronik Informationstechnik e. V. (German Association of Electrical Engineering, Electronics and Information Technology) (http://www.vde.de)
VDI	Verein Deutscher Ingenieure e. V. (Association of German Engineers) (http://www.vdi.de)
VDMA	Verband Deutscher Maschinen- und Anlagenbau e. V. (German Machinery and Plant Manufacturers' Association) (http://www.vdma.org)
X1...X11	Designations for the valve connectors
XML	Extensible Markup Language (XML is a versatile language which combines text content with information on the text content)

Table 29: Abbreviations, symbols, specialist terms (part 3 of 3)

Tab. 29: Abbreviations, symbols, specialist terms

11.2 Additional literature

11.2.1 CAN fundamentals

CAN in Automation e. V.:

<http://www.can-cia.org>

Additional literature: CAN fundamentals

Etschberger, Konrad (editor):

CAN - Controller-Area-Network - Grundlagen, Protokolle, Bausteine, Anwendungen; Carl Hanser Verlag

Lawrenz, Wolfhard (editor):

CAN - Controller Area Network - Grundlagen und Praxis; Hüthig Verlag

11.2.2 Profibus fundamentals

PROFIBUS Users' Organization:

<http://www.profibus.com>

Additional literature: Profibus fundamentals

- Test Specification for PROFIBUS Slaves, Version 2.0
- PROFIBUS Start-up Directive, Version 1.0.2, November 2006, Order No.: 8.031
- Profibus-DP Profile, Fluid Power Technology, Version 1.5

VDMA Head Office

<http://www.vdma.org>

- Profile Fluid Power Technology
- Proportional Valves and Hydrostatic Transmissions

Popp, Manfred:

PROFIBUS-DP/DPV1 - Grundlagen, Tipps und Tricks für Anwender; Hüthig Verlag

11.2.3 EtherCAT® fundamentals

EtherCAT® Technology Group:

<http://www.ethercat.org>

Additional literature: EtherCAT® fundamentals

- EtherCATDeviceDescription
Description of the XML-Schema of the EtherCAT® XML Slave Device Description File
- Technical Introduction and Overview
- EtherCAT® Introduction

11.2.4 Moog publications

Press releases:

<http://www.moog.com/Industrial/News>

Newsletters:

<http://www.moog.com/Industrial/Newsletter>

Articles in technical journals:

<http://www.moog.com/Industrial/Articles>

Presentations and scientific publications:

<http://www.moog.com/Industrial/Papers>

User information, TNS, catalogs, and similar:

<http://www.moog.com/>

**Additional literature:
Moog publications**

11.3 Quoted standards

11.3.1 CiA DSP

CiA DSP 305

CiA Draft Standard Proposal: CANopen Layer Setting Services and Protocol (LSS)

**Quoted standards:
CiA DSP**

11.3.2 DIN EN

DIN EN 954-1

Safety of machinery – Safety-related parts of control systems – Part 1: General design principles

Quoted standards: DIN EN

DIN EN 982

Safety of machinery – Safety requirements for fluid power systems and their components – Hydraulics

DIN EN 60204

Safety of machinery – Electrical equipment of machines

DIN EN 61000-6-2

Electromagnetic compatibility (EMC) – Part 6-2: Generic standards; immunity for industrial environments

DIN EN 61000-6-3

Electromagnetic compatibility (EMC) – Part 6-3: Generic standards - Emitted interference for residential, commercial and light-industrial environments

DIN EN 61000-6-4

Electromagnetic compatibility (EMC) – Part 6-4: Generic standards; emitted interference for industrial environments

DIN EN 61076-2-101

Connectors for electronic equipment - Part 2-101: Circular connectors - Detail specification for circular connectors M8 with screw- or snap-locking, M12 with screw-locking for low voltage applications

DIN EN 61158-2

Digital data communication in instrumentation and control – Field bus for industrial control systems

DIN EN 61558-1

Safety of power transformers, power supplies, reactors and similar products – Part 1: General requirements and tests

DIN EN 61558-2-6

Safety of transformers, reactors, power supply units and similar products for supply voltages up to 1,100 V – Part 2-6: Particular requirements and tests for safety isolating transformers and power supply units incorporating safety isolating transformers

DIN EN 175201-804

Detail specification: Circular connectors – Round contacts, size diameter 1.6 mm (0.063 in), threaded coupling

11.3.3 DIN EN ISO**DIN EN ISO 12100**

Safety of machinery – Basic concepts, general principles for design

Quoted standards:
DIN EN ISO

11.3.4 IEC**IEC 62407**

Real-time Ethernet control automation technology (EtherCAT®)

Quoted standards: IEC

11.3.5 IEEE**IEEE 802.3**

Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access Method and Physical Layer

Quoted standards: IEEE

11.3.6 ISO/DIS, ISO/IEC**ISO/DIS 11898**

Road vehicles – CAN protocol

Quoted standards:
ISO/DIS, ISO/IEC

ISO/IEC 8802-3

Information technology - Telecommunications and information exchange between systems - Local and metropolitan area networks; Specific requirements - Part 3: Carrier sense multiple access with collision detection (CSMA/CD) access method and physical layer specifications

11.3.7 TIA/EIA**ANSI/TIA/EIA-568-B.1**

Commercial Building Telecommunications Cabling Standard Part 1: General Requirements

Quoted standards:
TIA/EIA

TIA/EIA 422 (formerly RS 422)

Electrical Characteristics of Balanced Voltage Digital Interface Circuits

TIA/EIA-485-A

Electrical Characteristics of Generators and Receivers for Use in Balanced Digital Multipoint Systems

TAKE A CLOSER LOOK.

Moog solutions are only a click away. Visit our website for more information and the Moog facility nearest you.

Argentina
+54 11 4326 5916
info.argentina@moog.com

India
+91 80 4057 6666
info.india@moog.com

Singapore
+65 677 36238
info.singapore@moog.com

Australia
+61 3 9561 6044
info.australia@moog.com

Ireland
+353 21 451 9000
info.ireland@moog.com

South Africa
+27 12 653 6768
info.southafrica@moog.com

Brazil
+55 11 3572 0400
info.brazil@moog.com

Italy
+39 0332 421 111
info.italy@moog.com

Spain
+34 902 133 240
info.spain@moog.com

Canada
+1 716 652 2000
info.canada@moog.com

Japan
+81 46 355 3767
info.japan@moog.com

Sweden
+46 31 680 060
info.sweden@moog.com

China
+86 21 2893 1600
info.china@moog.com

Korea
+82 31 764 6711
info.korea@moog.com

Switzerland
+41 71 394 5010
info.switzerland@moog.com

Finland
+358 10 422 1840
info.finland@moog.com

Luxembourg
+352 40 46 401
info.luxembourg@moog.com

Turkey
+90 216 663 6020
info.turkey@moog.com

France
+33 1 4560 7000
info.france@moog.com

The Netherlands
+31 252 462 000
info.thenetherlands@moog.com

United Kingdom
+44 168 429 6600
info.uk@moog.com

Germany
+49 7031 622 0
info.germany@moog.com

Norway
+47 6494 1948
info.norway@moog.com

USA
+1 716 652 2000
info.usa@moog.com

Hong Kong
+852 2 635 3200
info.hongkong@moog.com

Russia
+7 8 31 713 1811
info.russia@moog.com

www.moog.com/industrial

Moog is a registered trademark of Moog Inc. and its subsidiaries. All trademarks as indicated herein are the property of Moog Inc. and its subsidiaries.
© 2013 Moog GmbH. All rights reserved. All changes reserved.

User Manual "Electrical Interfaces"
Version 1.1, 13/07, CA63420-001