

Electro/Pneumatic Converter

Models 8064A and 8064C

Typical applications

- Controls AMOT pneumatic temperature control valves (G valve)
- Converts a 4 to 20 mA input signal to a directly proportional 0.2 to 1 bar (3 to 15 psi) pneumatic output signal

Key benefits 8064A

- High vibration resistance - Lloyds Marine
- Suitable for longer pipe runs
- Fully adjustable for optimised system operation
- ATEX hazardous area certification



8064A

Key benefits - 8064C

- Accepts high supply pressure - avoids use of additional regulator
- Factory set for ease of installation
- Low cost alternative to 8064A
- ATEX hazardous area certification



8064C

amot

www.amot.com

Electro/Pneumatic Converter - Models 8064A & 8064C

Overview - 8064A



8064A

Using a clean, regulated air supply, model 8064A transducer provides a 3 - 15 psig pneumatic output which is proportional to a DC milliamp input. The mechanism is damped with a viscous silicone fluid, making it insensitive to shock and vibration.

Model 8064A may be specified with output either direct or reverse acting, increasing or decreasing with an increasing input.

Application

Electro-pneumatic system



Temperature probe
8060

Temperature controller
8071D

Electro-pneumatic converter
8064A

G valve


The electro-pneumatic valve system (see datasheet Datasheet_G_temperature_control_valve) combines both electric and pneumatic technology, consisting of a pneumatically actuated three-way control valve with an electro-pneumatic converter.

The probe sends a resistance signal to the electronic controller, which in turn sends a 4 to 20mA signal to the 8064A I/P converter that converts this to a pneumatic signal.

The electro-pneumatic system combines the features and functionality of the AMOT electronic control system with the fail-safe action benefits of a pneumatically actuated valve.

Dimensions - 8064A

Dimensions in mm (inches)

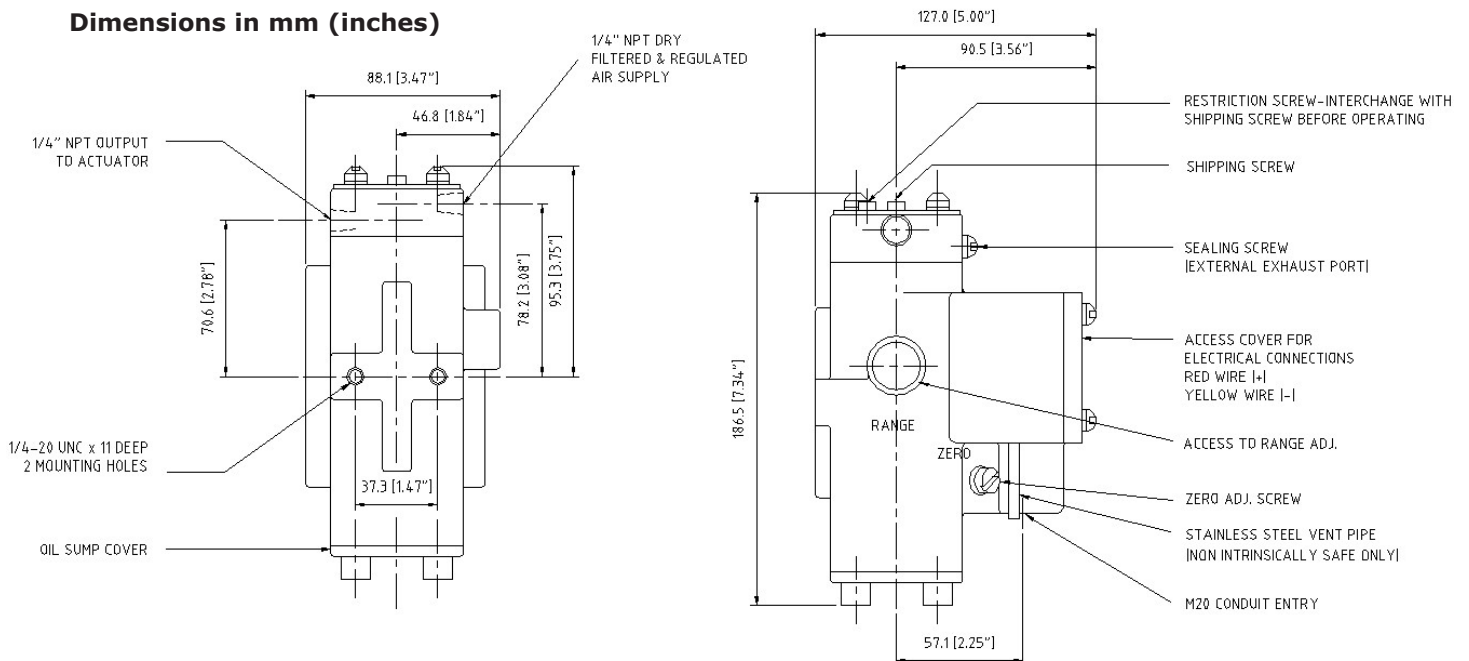

Electro/Pneumatic Converter - Models 8064A & 8064C

Specification - 8064A

Supply pressure	1.3 to 2.1 bar	(18 to 30 psi)
Input	4 to 20 mA	
Output	0.2 to 1 bar	(3 to 15 psi)
Zero offset adjustment	+40% to -20% of span	
Output capacity	0.16 SCFM	
Output volume	170 cc maximum recommended	
Response level	0.025% of span	
Calibration accuracy	0.25% of span	
Supply pressure effect	Less than 1% of span	
Ambient temperature limit	-40°C to +80°C	(-40°F to +180°F)
Coil resistance	185 Ohms	
Vibration	5 - 100 Hz 4g (Lloyds Register Type Approval System Test Specification Number 1 2002 - Vibration Test 2)	
Body material	Cast iron	
Top housing & terminal cover	Aluminium	
Paint finish	Epoxy powder	
Weight	4.5 kg	(10.5 lbs)
Mounting	Vertical only	
Hazardous area certification	ATEX EEx ia IIC T6	
CE marking	Not CE marked, not suitable for new installation within EU	

Electro/Pneumatic Converter - Models 8064A & 8064C

Overview - 8064C




The 8064C Proportional I/P Converter uses advanced closed loop solid-state electronic control to achieve accurate, high resolution pressure control.

It is available in intrinsically safe and non-incendive type nL versions and its minimum vibration effect and IP66 weatherproof rating make it ideal for field application.

Application

Electro-pneumatic system

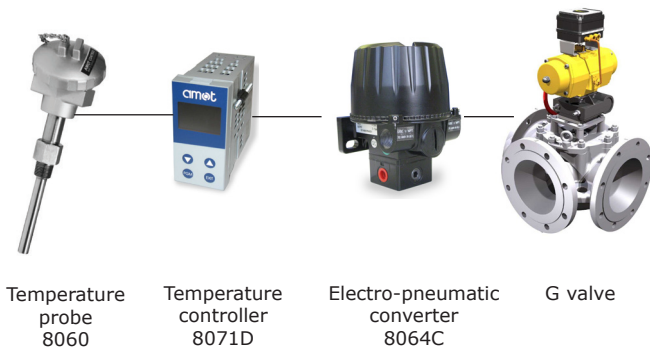


The electro-pneumatic valve system (see Datasheet_G_temperature_control_valve) combines both electric and pneumatic technology, consisting of a pneumatically actuated three-way control valve with an electro-pneumatic converter.

The probe sends a resistance signal to the electronic controller, which in turn sends a 4 to 20mA signal to the 8064C I/P converter that converts this to a pneumatic signal.

The electro-pneumatic system combines the features and functionality of the AMOT electronic control system with the fail-safe action benefits of a pneumatically actuated valve.

Dimensions - 8064C

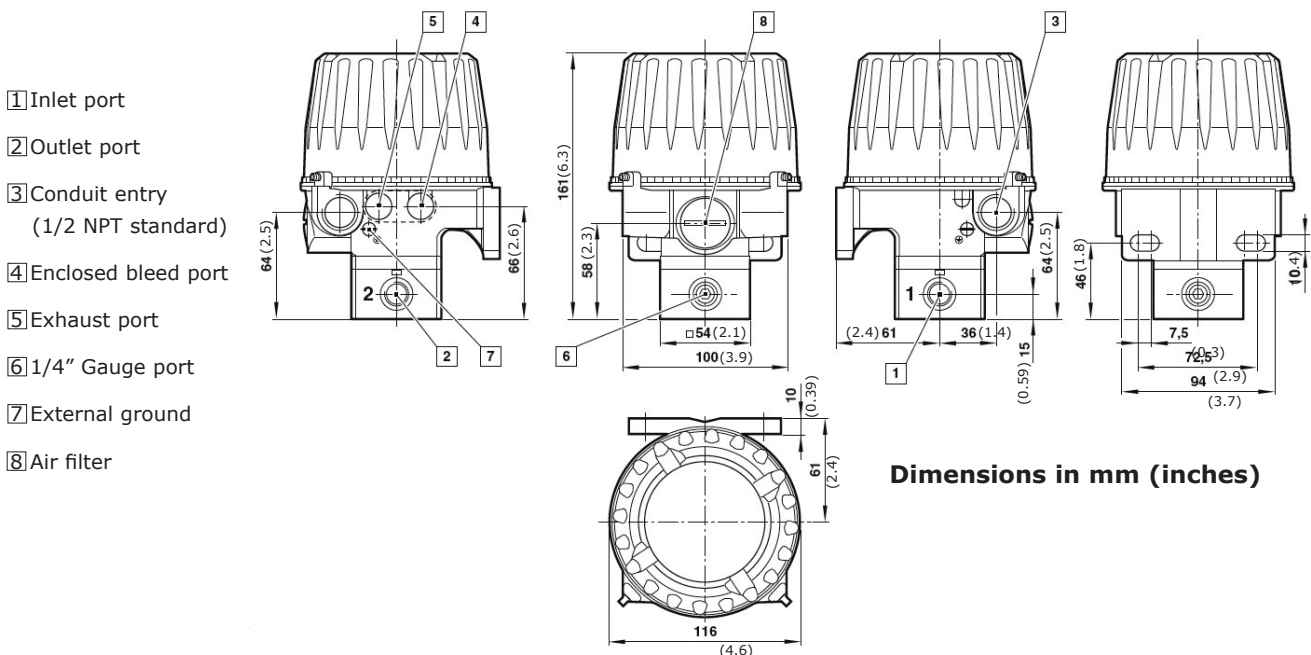

Electro/Pneumatic Converter - Models 8064A & 8064C

Specification - 8064C

Pneumatic

Supply pressure	1.2 to 10 bar	(18 to 150 psi)
Output	0.2 to 1 bar	(3 to 15 psi)
Supply sensitivity	Less than 0.1% span over full supply pressure range	
Flow	Max 300N l/min	(12 scfm)
Air consumption	<2.5N l/min at 50% signal	(0.025 cfm)
Temperature effect	Typically less than 0.035% of span/°C between -40°C to +85°C (-40°F to +185°F)	
Response time	1 sec (from 0 to 90% or 100 to 10% of output pressure into a 0.5 litre load)	
Degree of protection	IP66, NEMA 4X (when mounted upright)	
Linearity	<0.1% of span	
Hysteresis	<0.1% of span	

Physical

Ambient temperature	-40°C to +85°C	(-40°F to +185°F)
	Contact us for use below +2°C (35°F)	
Vibration immunity	Output pressure changes less than 3% for vibration amplitude 4mm 5 - 15 Hz, 2g 15 - 150 Hz	
Weight	2.07 kg	4.5 lb
Calibration	Independent control of 0% and 100% set points. Adjustable by potentiometers up to 20% of output range. Unit is factory calibrated to within 1% of span.	
Materials	Body	Aluminium and zinc diecasting
	Diaphragms	Nitrile
	Black epoxy powder coating standard	
Electromagnetic compatibility	CE marked	Conforms to EC requirements EN 50081-2 (1994) and EN 50082-2 (1995)

Electrical




Electrical input signal	4 - 20 mA (two wire)	
	Terminal voltage <6.5V @20mA	
Failure mode	Signal falls to below 15 mbar (0.2 psi) in <2 sec, when input signal fails	
Overload protection	100 mA max overload current	
Insulation resistance	>100 mΩ at 850V dc electrical terminals to case	
Tight shut off	Adjustable up to 4.5 mA to achieve tight shut off	
Input impedance	The impedance changes with applied current because its terminal voltage remains fairly constant, therefore:	
	4 mA = approx 1370Ω	
	12 mA = approx 470Ω	
	20 mA = approx 290Ω	
Connections	1/2" NPT or M 20; internal terminal block with capacity up to 2.5 mm ² cable	

Electro/Pneumatic Converter - Models 8064A & 8064C

Specification - 8064C cont'd

Actuation	Port Size	Max Flow (N L/min)	Output Pressure	Port
	G1/4	300	0.2 - 1 bar	BSP
	G1/4	300	3 - 15 psi	BSP

Certification 8064C

Certification Agency	Explosion proof/ flame proof	Intrinsically safe	Type N/Non-incendive	Others
SIRA (CENELEC ATEX approved) 	EEx d IIC T4 Ta=-20°C to +40°C EExd IIB+H ₂ T5/T6 Ta=-20°C to +80°C (T5) Ta=-20°C to +65°C (T6) Umax=30V Sira 01ATEX1006 2G (T4/T5/T6)/2D (95°C)	EEx ia IIC T4 Ta=-40°C to +85°C Ui=30V, li=110mA Pi=0.84W Ci=6nF, Li=100µH Sira 01ATEX2007X 1G (T4)/1D (95°C)	EEx nL IIC T5 Ta=-40°C to +85°C li=24mA Ci=6nF Li=100µH Sira 01ATEX4008X 3G(T5)/3D (95°C)	
Factory Mutual 	Class I, Division 1, Group B, C, D; T6, Ta=75°C T5, Ta=85°C	Class I, II, III, Division 1, Group A, B, C, D, E, F, G; T4, Ta=85°C	Class I, Division 2, Group A, B, C, D; T6, Ta=75°C T5, Ta=85°C	Dust Ingress Protection: Class II, III, Division 1, Group E, F, G; T6, Ta=75°C T5, Ta=85°C Suitable for: Class II, III, Division 2, Group F, G; T6, Ta=75°C T5, Ta=85°C
CSA 	Class I, Group B, C, D; Class II, Group E, F, G; Class III; Ex d IIC;T4 Ex d IIB+H ₂ ; T5/T6	Class I, Group A, B, C, D Class II, Group E, F, G Class III EX ia IIC; T4	Class I, Division 2, Group A, B, C, D; Ex nL IIC; T5 Class II, Division 2 Group E, F, G; Class III	

How to order

Use the table below to select the unique specification of your 8064A converter:

Example code	8064A	7716	-AA	Code Description
Model & revision level				Model & revision level
	8064A			Converter
Type				Type
		7716		Direct acting - output increases as input increases
Customer special options				Customer special options
			-AA	Standard product
			-**	Customer special code assigned

The 8064C is supplied as a standard unit. You will need to state the code below when ordering.
Code: 8064C00-AA

Example code	8064C00	-AA	Code Description
Model & revision level			Model & revision level
	8064C00		Converter
Customer special options			Customer special options
		-AA	Standard product
		-**	Customer special code assigned

Electro/Pneumatic Converter - Models 8064A & 8064C

Americas

AMOT - USA

8824 Fallbrook Dr
Houston, TX 77064
USA

Tel: +1 (281) 940 1800
Fax: +1 (713) 559 9419
Email: sales.houston@amot.com

AMOT - CANADA

4320 Roper Rd NW
Edmonton, Alberta T6B 3T8
Canada

Tel: +1 (780) 465 4429
Fax: +1 (780) 469 6275
Email: sales.houston@amot.com

Asia Pacific

AMOT - CHINA

Bd. 7A, No. 568, Longpan Rd.
Malu Jiading, Shanghai 201801
China

Tel: +86 (0) 21 5910 4052
Fax: +86 (0) 21 5237 8560
Email: shanghai@amot.com

Europe, Middle East, Africa

AMOT - EMEA

Western Way
Bury St Edmunds
Suffolk IP33 3SZ

Tel: +44 (0) 1284 762222
Fax: +44 (0) 1284 760256
Email: sales@amot.com