

JB210

1-12 Channel iBox, Single Axis, Stainless Steel Enclosure




Product Features

Fully featured vibration junction box with IEPE sensor condition indicator lights, and convenient interface with fold-forward panel for easy wiring.

Includes an IEPE bias indicator light to identify when data is to be collected or to show open and short circuit conditions

- ▶ Houses up to 12 channel inputs
- ▶ Convenient panel placement for easy user interface and hidden cabling
- ▶ Flip down panel allows for convenient wiring to terminal blocks

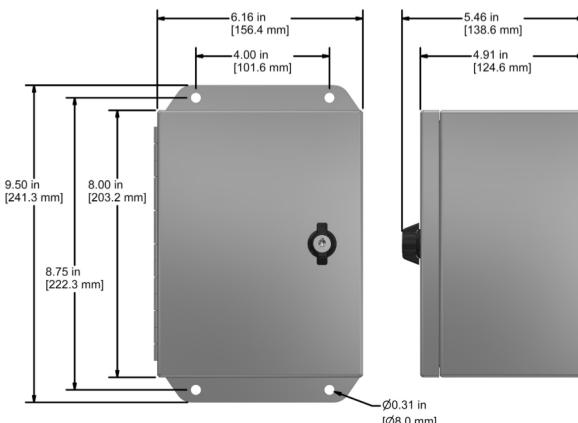

Specifications

Temperature Range	-58° to 180° F (-50° to 82° C)
Enclosure Material	Stainless Steel
Inputs	+, -, Shield
Outputs	BNC Jack and 2 Pin MIL
Continuous Output	Multi-Pin connector for interface with online systems (requires JB907-3A))
Channel Options	4, 6, 8, 10, 12
Rating	Nema 4X (IP66)
Door Closure	Twist Lock
Dimensions	7.25 x 9.50 x 4.88 in (184.2 x 241.3 x 123.9 mm)
Cord Grips	Optional
Switch	2 Pole
Bias Indicator	1 Channel
Resistance	Resistant to Hose Directed Fluid and Corrosion

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900