
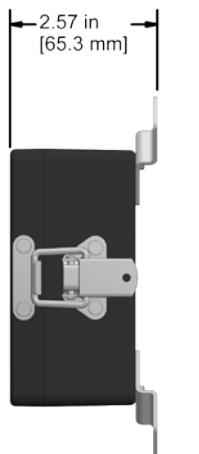


MX502-4A Powder Coated Aluminum Enclosure

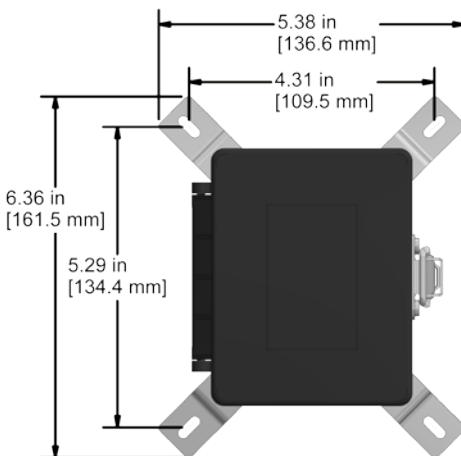

Product Features

Low-Cost, Covered BNC Cable Termination

Terminate 1 to 4 channels for safer, quicker and more accurate data collection. The NEMA 4X aluminum enclosure resists environmental hazards.

- 316 Stainless Steel latch and mounting feet resist corrosion in harsh environments
- Terminal strip located behind BNC panel for easy wiring with grounding
- Includes measurement location card to easily identify each channel

Specifications

Inputs	Conduit or Cord Grips to Terminal Strip
Output	BNC Jack Per Channel Electrically Isolated
Conduit Fittings	1/2" (12.70 mm) = 1-4 Channels
Cord Grips	0.118 – 0.256 inches (3.0 – 6.5 mm)
Rating	NEMA 4X (IP66)
Door Closure	316 Stainless Steel Snap Latch
Enclosure Material	Powder Coated Aluminum
Temperature Rating	-58° to 180° F (-50° to 82° C)
Resistance	Resistant to Hose Directed Fluid and Corrosion

Ordering Information

MX502 -

Enclosure Type
Aluminum Enclosure

Channels
1 = 1 Channel
2 = 2 Channels
3 = 3 Channels
4 = 4 Channels

Input Options
A = *User Defined
B = **Conduit Fitting
C = Cord Grips



Example Part Number: **MX502-2C**

Two channel mini-MAXX box, with cord grip inputs

* No punch outs are provided in the enclosure for cable entry. User may install any fitting required.

** For use with conduit.