



EM - ER 38 F / G

BLIND HOLLOW SHAFT INCREMENTAL ENCODER

MAIN FEATURES

Miniaturized encoder series for general factory automation applications, small AC motors and gearmotors.

- 3 channel encoder (A / B / Z) up to 14400 ppr
- Power supply up to +30 VDC with several electronic interfaces available
- Up to 500 kHz output frequency
- Cable output, connectors available on cable end
- Metal cover for high IP enclosure rating
- Blind hollow shaft diameter up to 10 mm
- Mounting by stator coupling or anti-rotation pin




ORDERING CODE	ER	38F	500	S	5/30	P	10	X	X	PR	.XXX
SERIES incremental encoder series EM incremental encoder series ER											
MODEL blind hollow shaft with stator coupling 38F blind hollow shaft with anti-rotation pin 38G											
RESOLUTION ppr from 1 to 14400 see table for pulses availability											
ZERO PULSE without zero pulse S with zero pulse Z											
POWER SUPPLY (with L electronic interface) 5 V DC 5 5 ... 30 V DC 5/30											
ELECTRONIC INTERFACE NPN N NPN open collector C push-pull P universal line driver TTL/HTL L power supply 5/30V - output RS-422 RS											
BORE DIAMETER mm 6 mm 8 mm 10											
ENCLOSURE RATING IP 65 X											
OPTION to be reported X											
OUTPUT TYPE radial cable (standard length 0,5 m) PR											
VARIANT custom version XXX											



© Copyright 2017 Eltra S.p.a. Unipersonale. All rights reserved. All informations in this catalog are subject to change without notice.
Eltra takes no responsibility for typographic errors. For the terms of sales please check the website. REV.170111


HOLLOW SHAFT INCREMENTAL ENCODERS | EM - ER 38 F / G

EM - ER 38 F

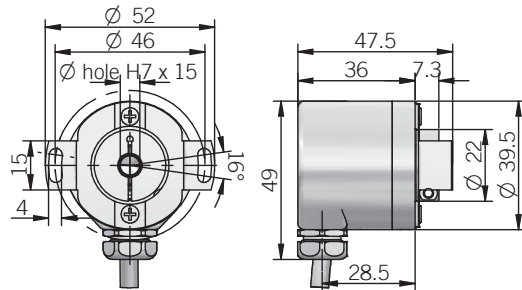

dimensions in mm

EM - ER 38 G

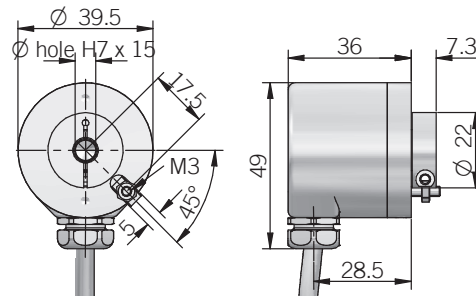

anti-rotation pin is included, for mounting instruction please refer to product installation notes

ELECTRICAL SPECIFICATIONS

Sensing principle	magnetic Asic (EM) / reflective OptoAsic (ER)
Resolution	from 1 to 14400 ppr
Power supply	5 = 4,5 ... 5,5 V DC 5/30 = 4,5 ... 30 V DC (reverse polarity protection)
Power draw without load	5 = 200 mW typical 5/30 = 600 mW typical
Max load current	20 mA / channel
Output type*	NPN / NPN open collector push-pull / line driver
Max output frequency	250 kHz up to 3600 ppr / 500 kHz from 4000 ppr
Counting direction	A leads B clockwise (shaft view)
Startup time	150 ms
Electromagnetic compatibility	IEC 61000-6-2 IEC 61000-6-4

*output levels according to power supply, for further details please see under Technical basics section

EM SERIES RESOLUTIONS

1 - 2 - 4 - 5 - 6 - 10 - 15 - 16 - 20 - 30 - 32 - 40 - 50 - 70 - 80 - 90

ER SERIES RESOLUTIONS

100 - 120 - 128 - 200 - 240 - 250 - 256 - 300 - **360** - 400 - 480 - **500** - **512** - 600 - 625 - 720 - 800 - 900 - **1000** - **1024** - 1200 - 1250 - 1440 - 1800 - **2000** - **2048** - **2500** - 3000 - **3600** - 4000 - 4096 - **5000** - 6000 - **7200** - 8000 - 8192 - 10000 - 12000 - 14400

please directly contact our offices for other pulses, preferred resolutions in bold

CONNECTIONS

Function	Cable output N / C / P	Cable output L / RS
+V DC	red	red
0 V	black	black
Ch. A	green	green
Ch. A-	/	brown
Ch. B	yellow	yellow
Ch. B-	/	orange
Ch. Z	blue	blue
Ch. Z-	/	white
⏏	shield	shield

MECHANICAL SPECIFICATIONS

Bore diameter	ø 6* / 8* / 10 mm
Enclosure rating	IP 65 (IEC 60529)
Max rotation speed	6000 rpm
Max shaft load	5 N axial / radial
Shock	50 G, 11 ms (IEC 60068-2-27)
Vibration	10 G, 10 ... 2000 Hz (IEC 60068-2-6)
Moment of inertia	0,8 x 10 ⁻⁶ kgm ²
Starting torque (at +20°C / +68°F)	< 0,01 Nm
Fixing torque for collar clamping	0,6 Nm recommended
Body material	EN-AW 2011 aluminum
Shaft material	1.4305 / AISI 303 stainless steel
Housing material	painted aluminum
Bearings	2 ball bearings
Bearings life	10 ⁹ revolutions
Operating temperature	-25° ... +85°C (-13° ... +185°F)
Storage temperature	-25° ... +85°C (-13° ... +185°F)
Weight	150 g (5,29 oz)

* with supplied adapter shaft



© Copyright 2017 Eltra S.p.A. Unipersonale. All rights reserved. All informations in this catalog are subject to change without notice.
Eltra takes no responsibility for typographic errors. For the terms of sales please check the website. REV 170111

We are here for you. Addresses and Contacts.

Headquarter Switzerland:

Angst+Pfister Sensors and Power AG
Thurgauerstrasse 66
CH-8050 Zurich
Phone +41 44 877 35 00
sensorsandpower@angst-pfister.com

Office Germany:

Angst+Pfister Sensors and Power Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim
Phone +49 89 374 288 87 00
sensorsandpower.de@angst-pfister.com

Office North America:

Angst+Pfister North America Inc.
10391 Brecksville Rd.
US-Brecksville, OH 44141
Phone +1 440 375-5212
info.apus@angst-pfister.com

Scan here and get an overview of personal contacts!



<https://sensorsandpower.angst-pfister.com/en/>
