




Description	Value
General information:	
Product name:	BM 9-29R NBR
Product No:	On request
EAN number:	On request
Technical:	
Rated flow:	9 m³/h
Rated head:	149 m
Stages:	29
Curve tolerance:	ISO9906:2012 3B
Model:	D
Materials:	
Type key, code for rubber components. E = EPDM, V=FKM:	NBR
Pump:	Stainless steel
	DIN W.-Nr. 1.4539
	AISI 904L
Impeller:	Stainless steel
	EN 1.4539
	AISI 904L
Motor:	Stainless steel
	EN 1.4539
	AISI 904L
Code for rubber:	NBR
Sleeve:	Stainless steel
	SAF 2205
	EN 1.4462
Installation:	
Maximum operating pressure:	82.7 bar
Maximum permissible inlet pressure:	60 bar
Maximum outlet pressure:	82 bar
Pipe connection standard:	PJE
Pipe connection:	S
	42 mm
Liquid:	
Pumped liquid:	Water
Maximum liquid temperature:	40 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Rated power - P2:	5.5 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 380-400-415 V
Rated current:	13-13-13.4 A
Starting current:	470-500-510 %
Cos phi - power factor:	0.85-0.81-0.76
Rated speed:	2840-2860-2880 rpm
Method of start:	Direct-on-line (DOL)
Enclosure class (IEC 34-5):	IP66
Thermal protection:	External
Built-in temp. transmitter:	Yes
Motor No:	7C193711
Others:	
Minimum efficiency index, MEI ≥:	0.70
Net weight:	67 kg
Gross weight:	120 kg
Shipping volume:	0.258 m³
Country of origin:	DK

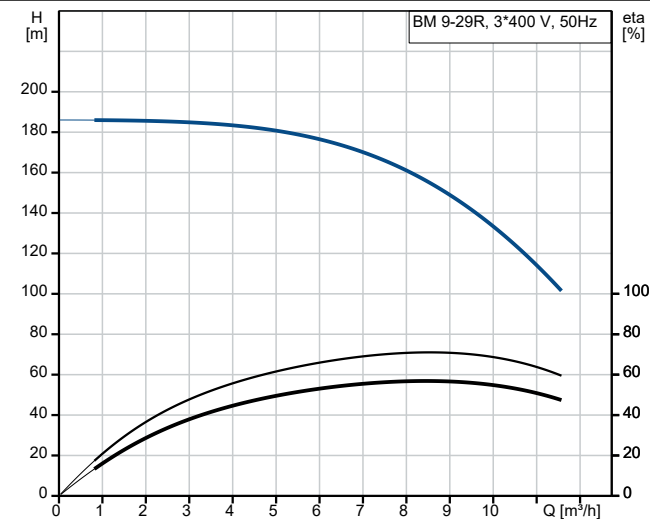

Pumped liquid = Water
Liquid temperature during operation = 20 °C
Density = 998.2 kg/m³

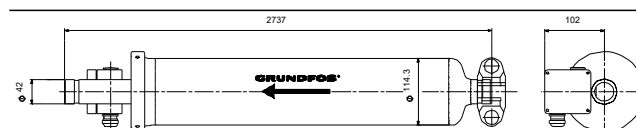

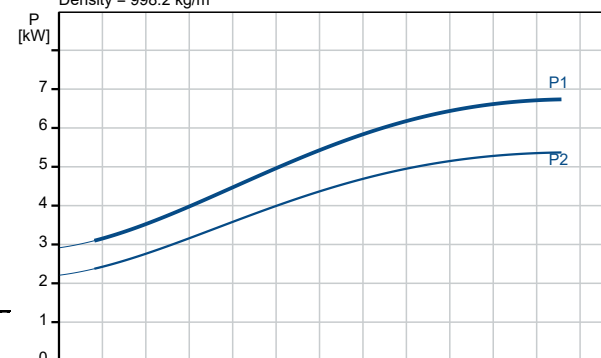

Company name:

Created by:

Phone:

Date:

17/01/2026

Description	Value
Custom tariff no.:	84137010

