




VPZ-M

On/Off Valves
Air Actuated

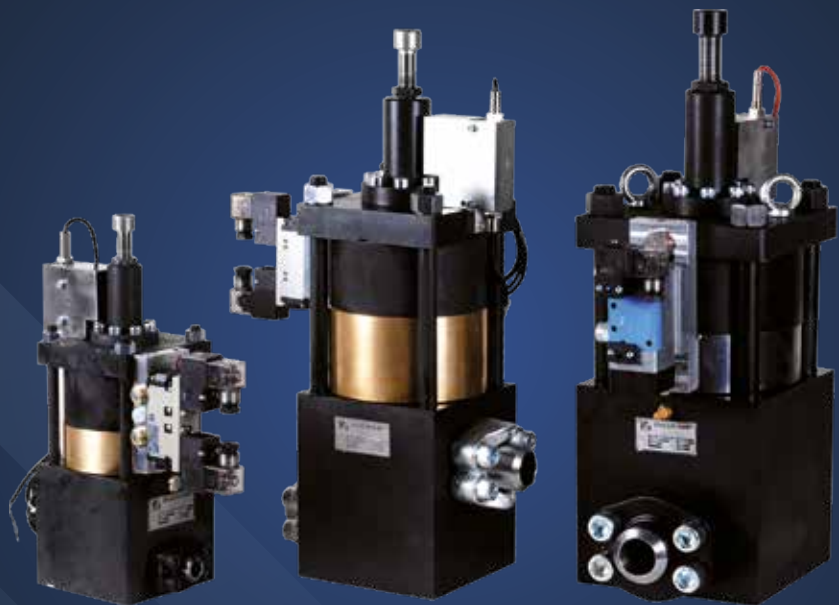

VPZ-M

General features

- High reliability for heavy and continuous duties
- Stroke regulation up to size 09, very smooth valve response (no shocking impact)
- Easy maintenance
- Metal-to-metal seal
- 5/2 - way air solenoid valve kit

Options


- Proximity switches
- Flanges kit
- Base frame
- Body in stainless steel
- Drilling for ANSI or special flanges
- 2-coil solenoid valve kit
- Cartridge version
- FRL group

Applications


- Designed to be used as descaling valves, by-pass valves on the pump line and directional valves

Technical data

Fluid:	Water and HFA
Function:	NC or NO
Working pressure:	42 MPa
Ambient temperature:	+2°C ÷ +60°C
Feeding:	Lubricated compressed air 0,5 ÷ 0,7 MPa
Electrical input:	24 v dc - 110/220 V
Connections:	SAE6000 drilling (42 MPa), INOXIHP drilling from size 11 (42 MPa)
Materials:	Body in carbon steel and internal parts in stainless steel

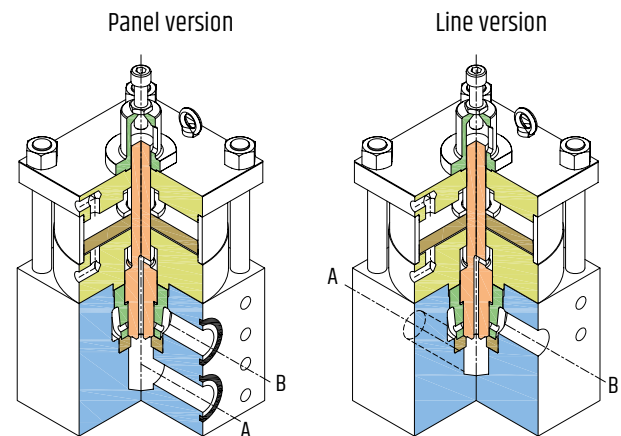

Selection diagram

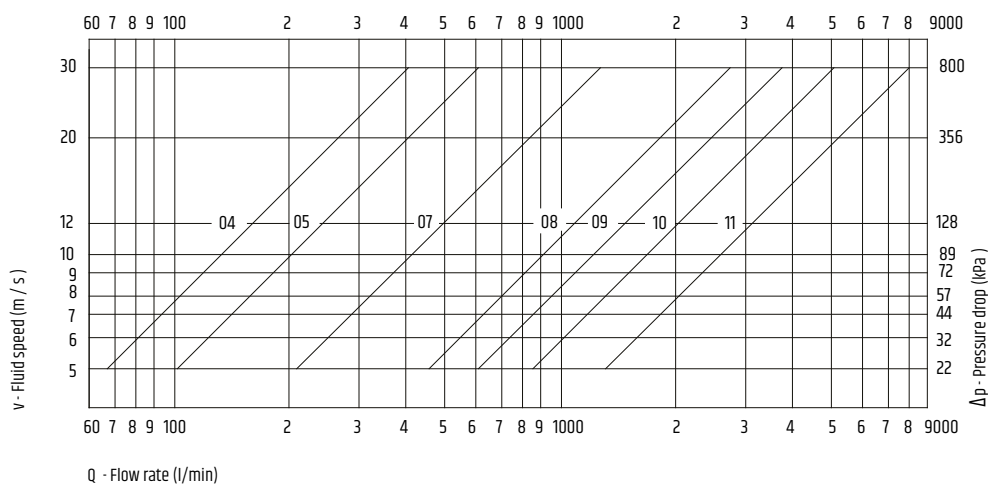

Valves sizes

INOXIHP	ND	inches
04	20	3/4"
05	25	1"
07	40	1 1/2"
08	50	2"
09	65	2 1/2"
10 (*)	80	3"
11 (*)	100	4"

*Only version PN 31,5 MPa



EAC This valve model is EAC certified



INOXIHP S.r.l.
IT - 20834 Nova Milanese (MB) - Via Garibaldi, 89
Tel: +39 0362 190111 - E-mail: inoxihp@inoxihp.com - inoxihp.com

INOXIHP
ABOUT USING WATER