

Valve Position
Indicator

VOLUME

Valve Position
Measuring Instrument

VOLUTRONIC[®]




KRACHT®
FLUID TECHNOLOGY AND SYSTEMS

Contents

Valve Position Indicator 02 /04	
Description / Modular design	4
Application examples	5
Indicator AVC 02 – Function / Type key	6
Indicator AVC 02 – Electrical characteristics	7
Indicator AVC 02 – Dimensions	8
Gear Type Volume Counter VCM 02/04 – Function / General characteristics / Hydraulic characteristics / Type key	9
Gear Type Volume Counter VCM 02/04 – Dimensions	10
Hydraulic Manifold HB 4 – Function / General characteristics / Hydraulic characteristics	11
Hydraulic Manifold HB 4 – Type key / Function	12
Hydraulic Manifold HB 4 – Dimensions	13
Valve Position Measuring Instrument VCA 0.2 NB P2/171	
Dimensions / Mounting surface / Description / Materials / General characteristics / Hydraulic characteristics	14
Electrical connection / Electrical characteristics / Signal characteristics	15
Valve Position Measuring Instrument VC 0.2 P1 PX ATEX	
Explosion-proof version (ATEX) / Dimensions / Mounting surface / Description / Materials / General characteristics / Hydraulic characteristics	16
Explosion-Proof Design (ATEX)	17
Recording of the application datas for KRACHT Valve positions indicators components	18
Declaration for Apparatus without an own Potential Ignition Source in Conformity with the Explosion Safety Directive 94/9/EC (ATEX 95)	19

Valve Position Indicator 02 /04

Description

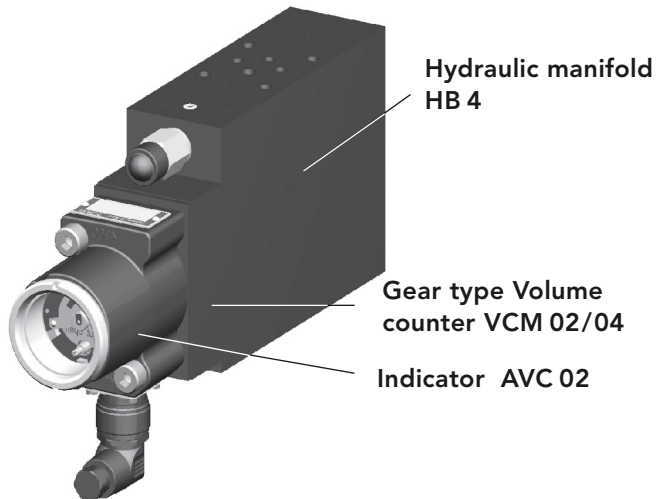


The Valve Position Indicator VOLUMEC is a combination unit with mounting surface for directional control valves NG 06 according to ISO 4401-03-02-0-02 / DIN 24340-A6.

In detail the module consists of a hydraulic manifold, a gear type volume counter and an indicator.

Mounted on a connection plate and completed by a directional control valve the VOLUMEC enables to control hydraulic operating ship armatures for ballast-, cargo- and stripping systems of all kind of tankers. In addition to that the adjusting path of the armature will be measured and displayed.

The Valve Position Indicator is suitable for the installation into deck boxes. The indication of the volumetric entered armature position can be read off optically locally or can be taken electrically by potentiometers or open / closed switches.

Modular design

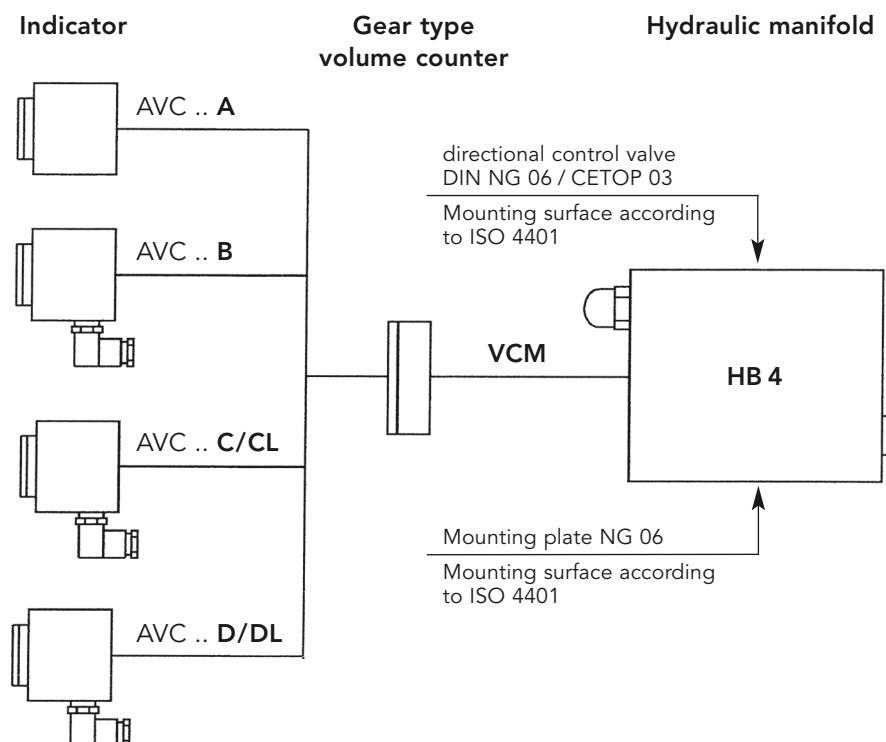

VOLUMEC Indicator



- AVC .. A Optically
- AVC .. B Open/close switches
- AVC .. C/CL Potentiometer
- AVC .. D/DL Open/close switches and potentiometer

Valve Position Indicator 02 /04

Application examples



Application examples

for 4/3 directional valves spring centred (function 0311)

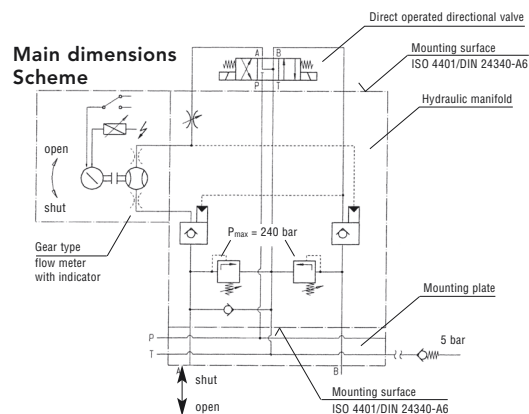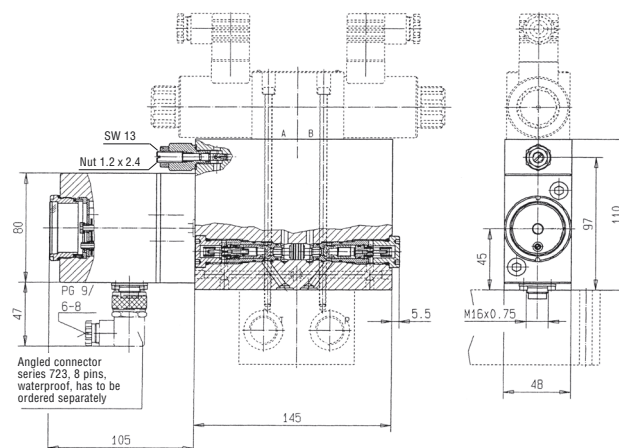



Application examples

for 4/2 directional valves spring return (function 0324)

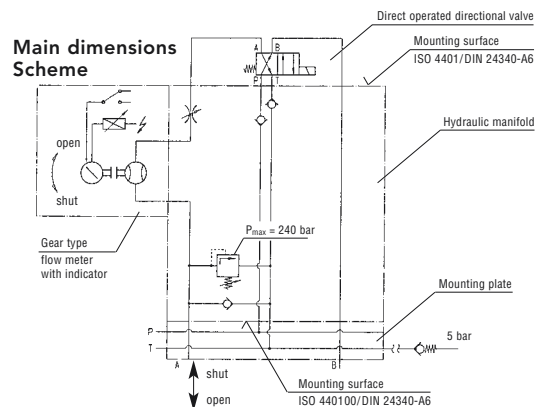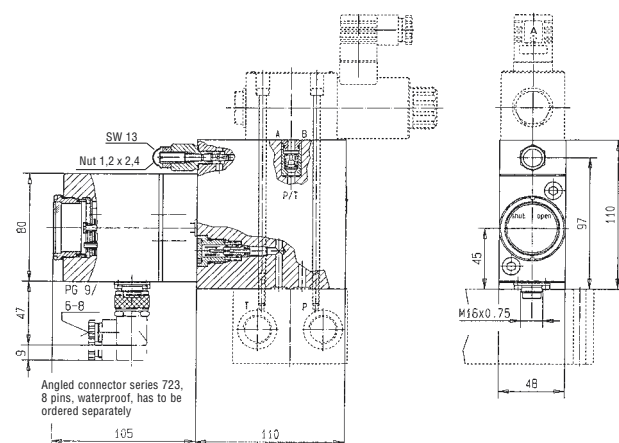

Application examples

for 4/2 directional valves with detend (function 0324)

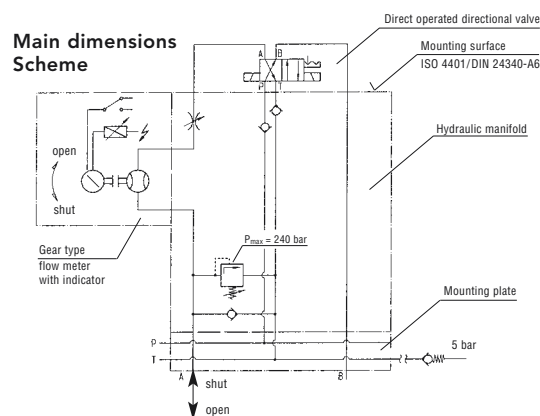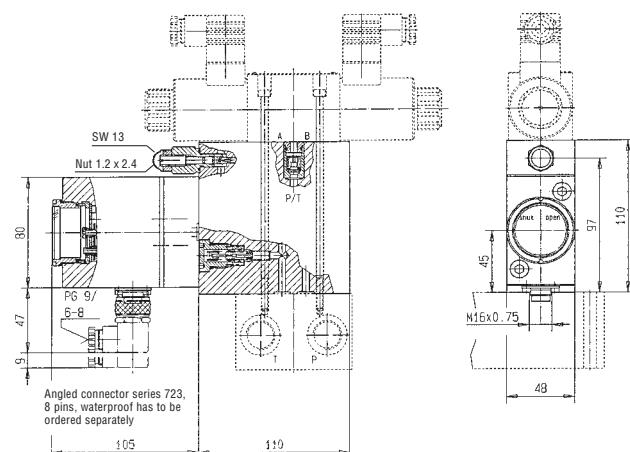

Indicator AVC 02

Function


Together with the gear type volume counter the indicator builds the measuring unit. The turning of the gear wheels is transferred via a magnetic drive to the gear box of the indicator. For each application the turndown ratio of the gear box is configured to get a pointer movement of approx. 180°. The pointer is limited by two end stops. To reset the indication at each end position a slipping clutch is integrated.

The driving shaft of the magnetic drive is equipped with a small indication to recognize the movement of the gear wheels. It can be used as leakage detection.

The indicator is completely separated from the hydraulic circuit.

Type key – Indicator

Ordering example

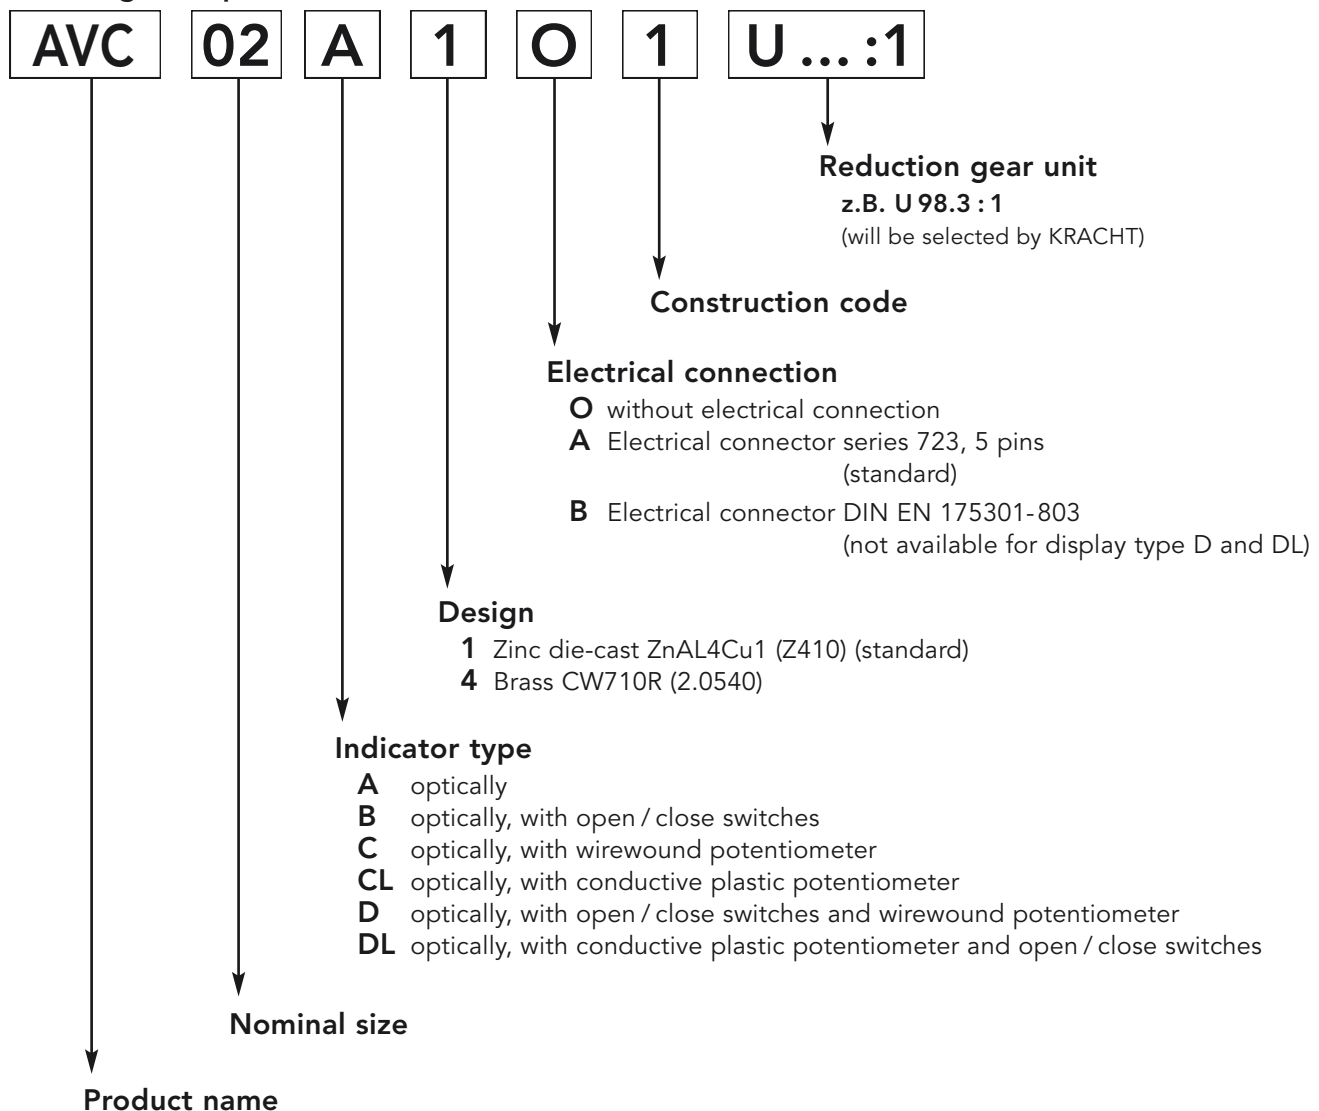

Indicator AVC 02


Electrical characteristics

Electric installation – Indicator type B

Miniature round connector
serie 723

Contact plate

Contact arrangements,
view to the solder-contacts

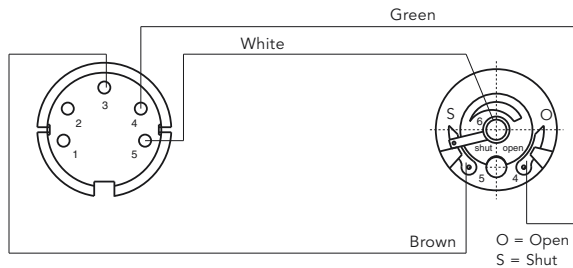


Electric installation – Indicator type C, CL

Miniature round connector
serie 723

Potentiometer

Contact plate

Contact arrangements, Open ca. 800 Ohm
view to the solder-contacts Shut ca. 220 Ohm

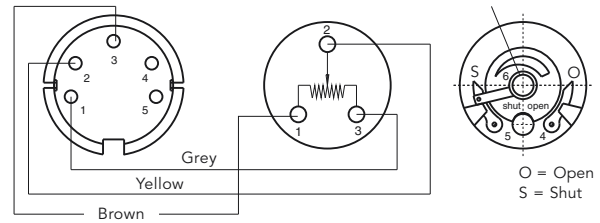


Electric installation – Indicator type D, DL

Miniature round connector
serie 723

Contact plate

Contact arrangements, Open ca. 800 Ohm
view to the solder-contacts Shut ca. 220 Ohm

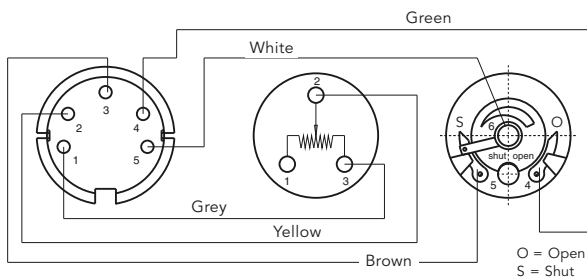


Technical data potentiometer

Electrical data	wirewound potentiometer (C, D)	conductive plastic potentiometer (CL, DL)
Nominal resistance R	1 K Ω	1 K Ω
Resistance tolerance	$\pm 10\%$	$\pm 20\%$
Linearity	$\pm 1.0\%$	$\pm 2\%$
Max. wiper current in case of malfunction	100 mA	1 mA
Power rating P	1 W/85 °C (195 °F)	0.2 W to 55 °C (131 °F)
Dielectric strength	900 VAC/1 min	500 V _{eff} /1 min
Insulating resistance	10 G Ω at 500 V DC	> 1 G Ω at 500 V DC
Resistance resolution	0.37 %	
Ambience conditions		
Operating temperature	-55 °C ... +150 °C (-131 °F ... +302 °F)	-55 °C ... +105 °C (-131 °F ... +221 °F)
Climatic rating	55/150/56	
Degree of protection	IP 67	
Vibration	10 g (30 ... 2000 Hz, 0,75 mm)	
Shock	50 g (half sine pulse, 7 ms)	

Indicator AVC 02


Dimensions AVC 02.1 (Standard)

Indicator without angled connector (Indicator type A)

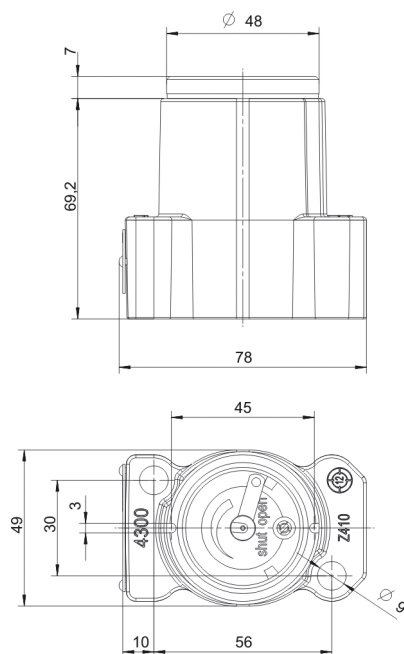

Weight: 0,7 kg


Indicator with angled connected (Indicator type B, C, CL, D und DL)

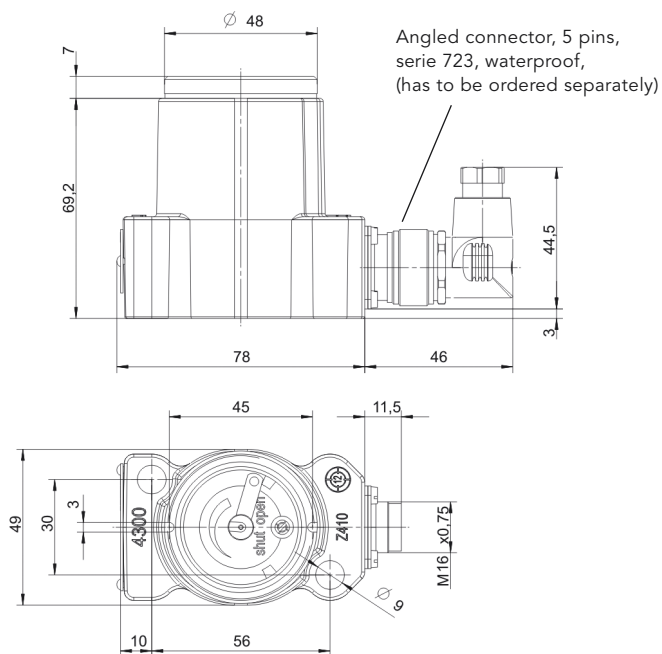

Weight: 0,75 kg


Dimensions AVC 02.4 (Brass)

Indicator without angled connector (Indicator type A)

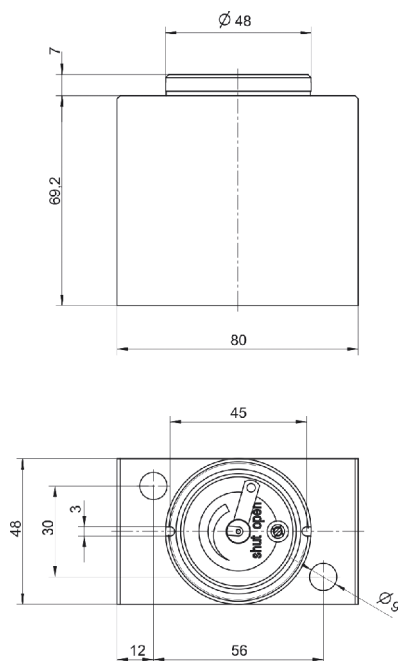

Weight: 1,6 kg

Indicator with angled connected (Indicator type B, C, CL, D und DL)

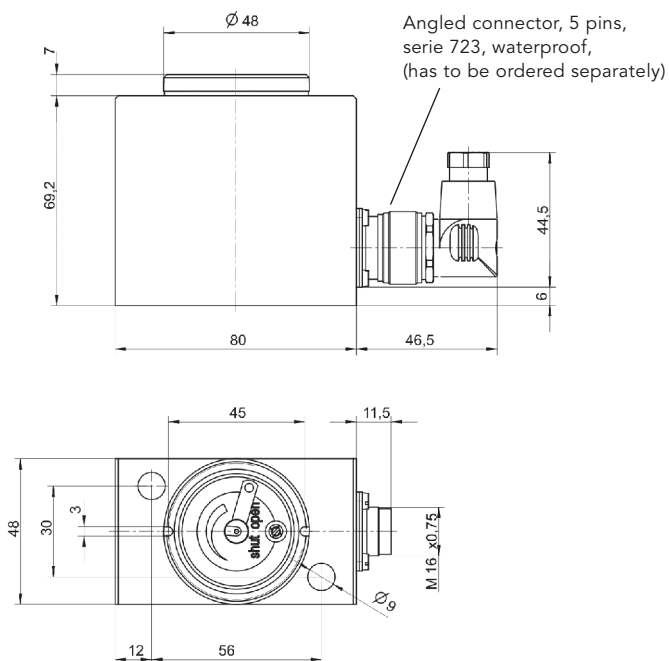

Weight: 1,65 kg

Gear Type Volume Counter VCM 02/04

Function

The gear type flow meter can be used with all known hydraulic fluids, which have a minimum lubricity, are not aggressive concerning the used materials. The movement of the gears is transferred to the indicator by a permanent-magnetic coupling.

There is no connection between the indicator and the hydraulic circuit.
The volume counter with connected indicator is suitable for installation in deck-boxes.

General characteristics


Connection	Plate mounted
Weight	VCM 02.1... : 0,75 kg VCM 02.4... : 0,80 kg VCM 04.1... : 1,05 kg VCM 04.4... : 1,15 kg
Mounting position	optional
Dimensions	see page 10
Ambient temperature	$\vartheta_{m \min} = -20\text{ °C} (-4\text{ °F})$ $\vartheta_{m \max} = +60\text{ °C} (+140\text{ °F})$
Liquid temperature	$\vartheta_{m \min} = -20\text{ °C} (-4\text{ °F})$ $\vartheta_{m \max} = +80\text{ °C} (+176\text{ °F})$

Hydraulic characteristics

Max. pressure	$p_{\max}$	= 200 bar
Max. pressure peak	p	= 240 bar
Max. flow rate	VCM 02 Q	= 4 l/min
	VCM 04 Q	= 7 l/min
Viscosity	$\nu_{\min}$	= 20 mm/s
	$\nu_{\max}$	= 380 mm/s (higher viscosities on request)
Fluids	Mineral oil acc. to DIN 51524/25 other fluids on request	


Type key – Volume counter

Ordering example

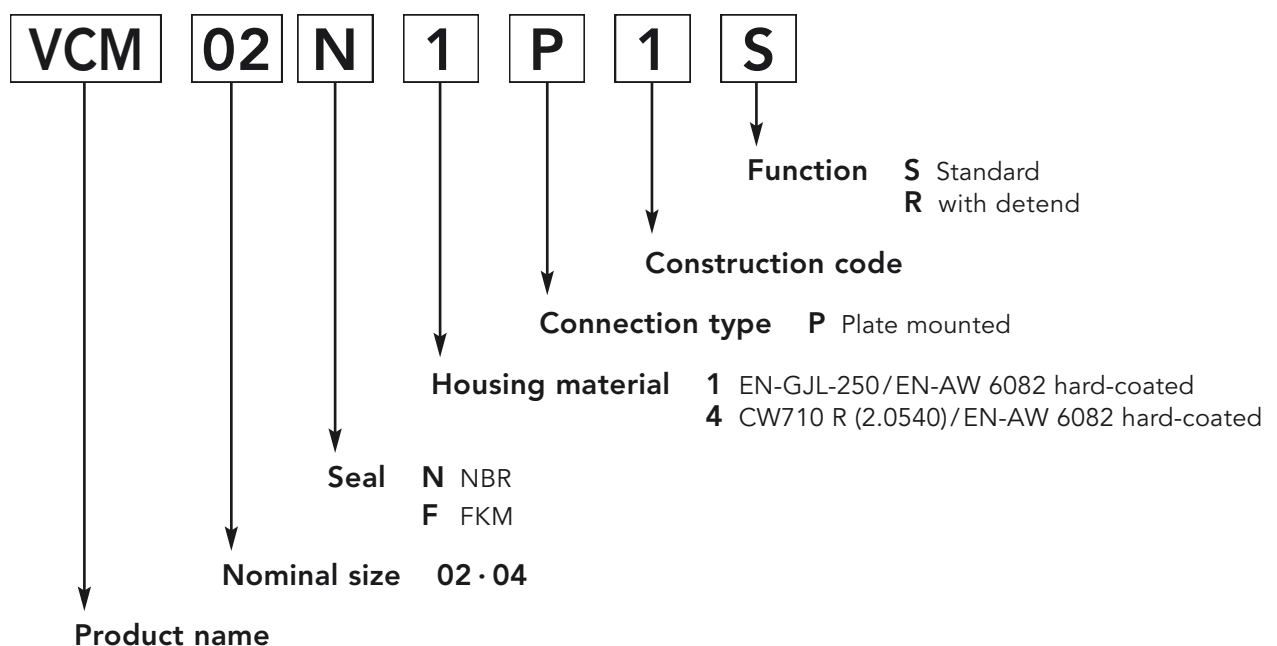


Gear Type Volume Counter VCM 02/04


Dimensions VCM 02... S (Standard)

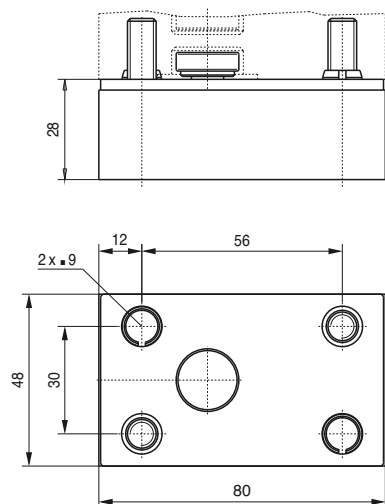


Dimensions VCM 04... S (Standard)

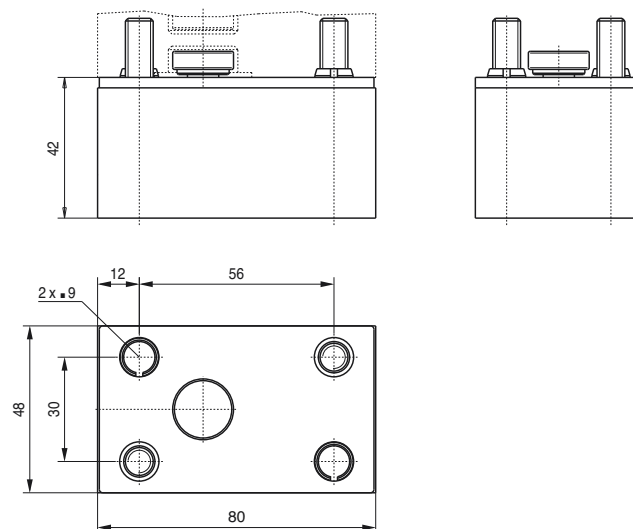

Dimensions VCM 02... R (with detend)

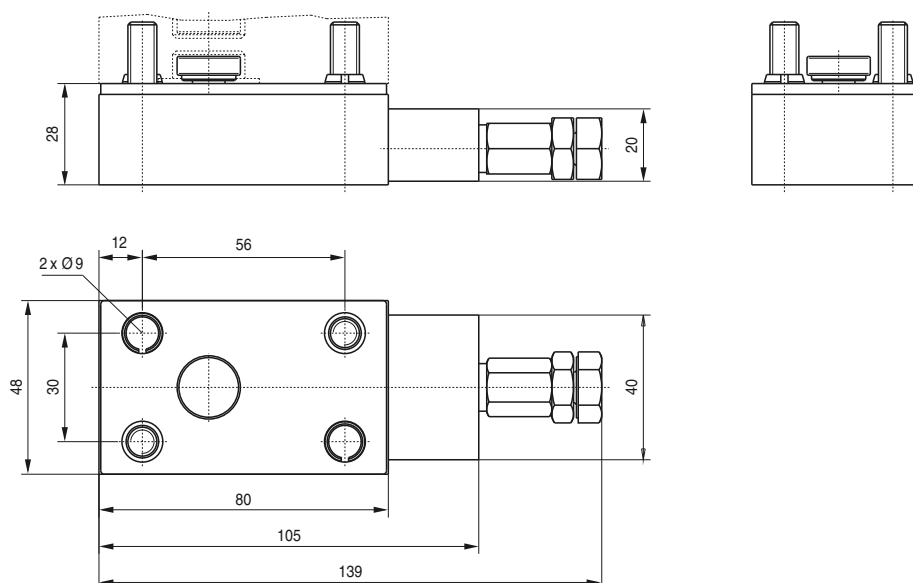

Mounting surface VCM 02/04

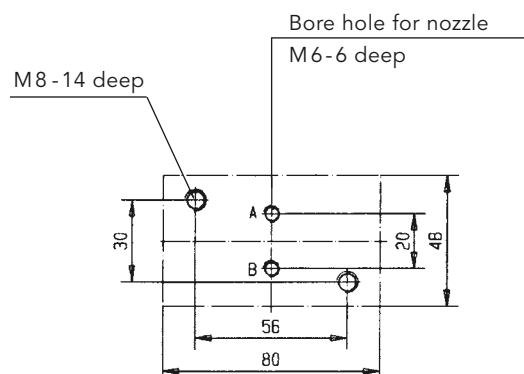

Hydraulic Manifold HB 4

Function 0311

- double pilot operated check valve for holding the actuator position
- two pressure relief valves for limiting the pressure caused by increased temperature
- throttle valve in port A for speed regulation of the actuator
- check valve for filling the piping to avoid wrong indications when temperature fluctuates

Function 0324

- check valve in P for holding the actuator position when switching parallel actuators
- check valve in T to avoid indicator fluctuations due to pressure pulsation
- one temperature pressure relief valve for limiting the pressure caused by increased temperature
- throttle valve in port A for speed regulation of the actuator
- check valve for filling the piping to avoid wrong indications when temperature fluctuates

General characteristics

Mounting surface	ISO 4401 / DIN 24340-A6
Nominal size	06
Design	Sandwich-seatvalve
Type of fixation	Plate mounted
Type of connection	Mounting plate
Dimensions	see page 13
Mounting position	optional
Flow direction	see schema page 12
Ambient temperature	$\vartheta_{\min} = -20\text{ °C} (-4\text{ °F})$ $\vartheta_{\max} = +60\text{ °C} (+140\text{ °F})$
Liquid temperature	$\vartheta_{m\min} = -20\text{ °C} (-4\text{ °F})$ $\vartheta_{m\max} = +80\text{ °C} (+176\text{ °F})$
Weight	HB 4 A 0311.. 5,2 kg HB 4 D 0311.. 6,2 kg HB 4 A 0324.. 3,9 kg HB 4 D 0324.. 4,7 kg


Hydraulic characteristics

Operating pressure	$p_{\max} = 200\text{ bar}$
Pressure relief valve	$p_{\max\text{ DBV}} = 240\text{ bar}$
Flow rate	6 l/min (10 l/min)
Viscosity	$\nu_{\min} = 20\text{ mm}^2/\text{s}$ $\nu_{\max} = 380\text{ mm}^2/\text{s}$
Fluids	Mineral oil acc. to DIN 51524/25 other fluids on request

Hydraulic Manifold HB 4


Type key – Hydraulic manifold

Ordering example

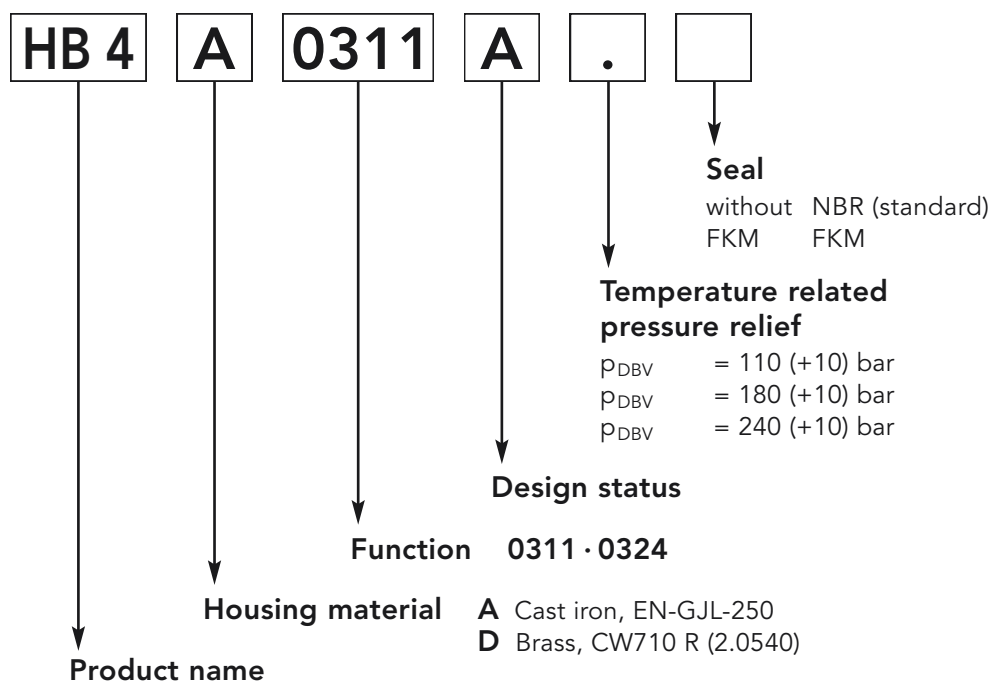


Function

Scheme 0311

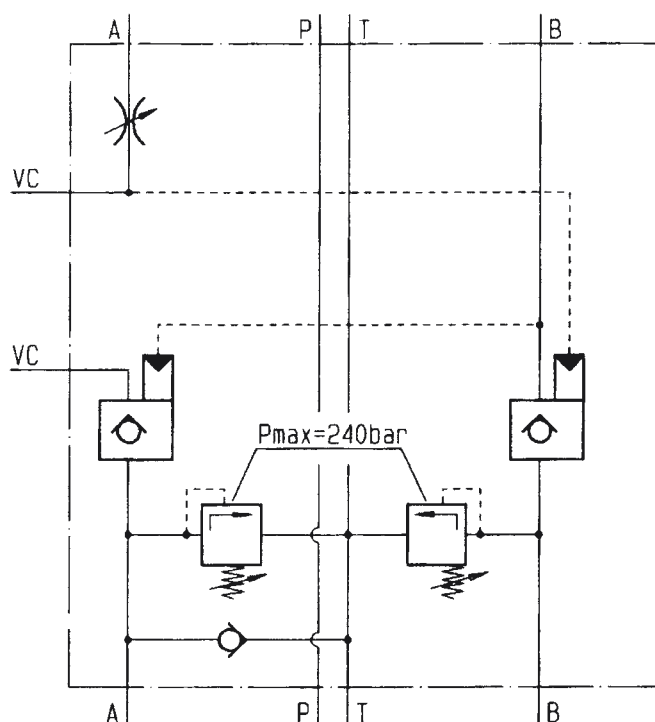


Scheme 0324

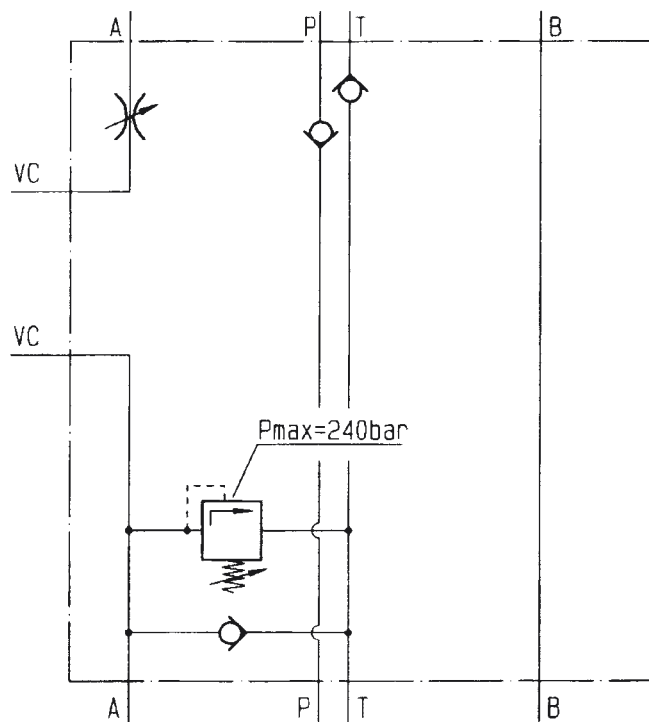


Hydraulic Manifold HB 4

Dimensions

HB 4 . 0311 ..

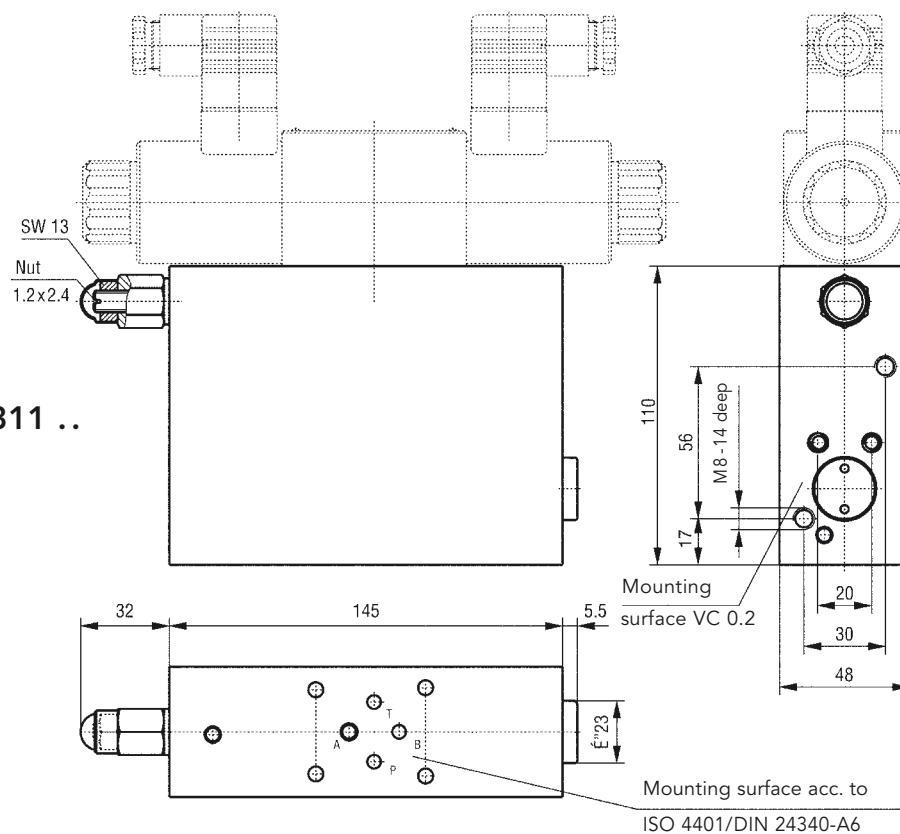


HB 4 . 0324 ..

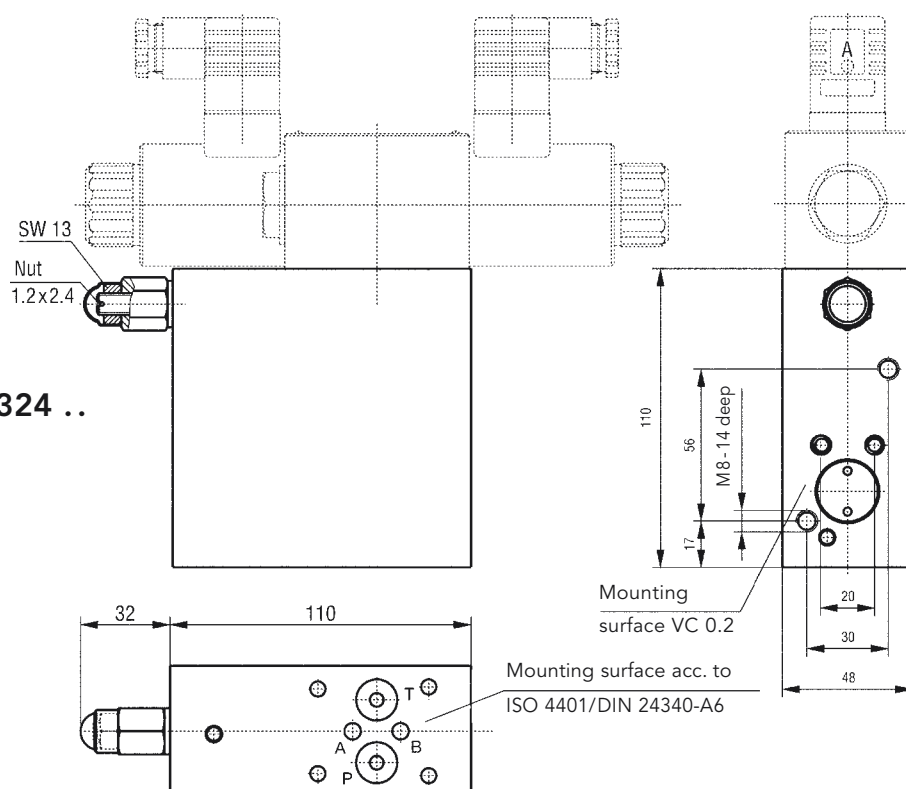


Valve Position Measuring Instrument VCA 0.2 NB P2/171

Dimensions

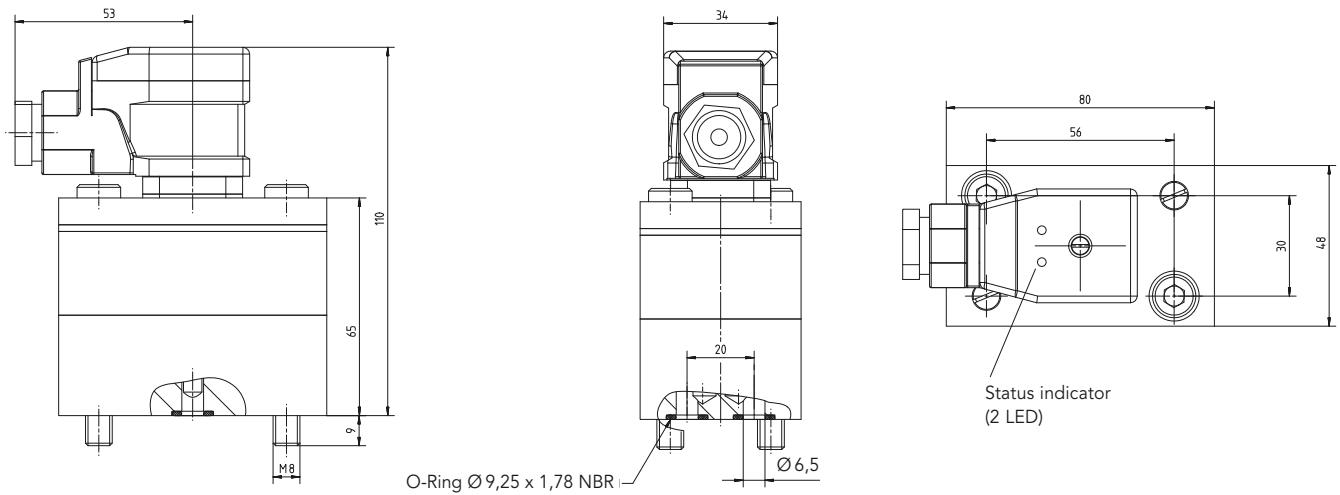

Mounting surface

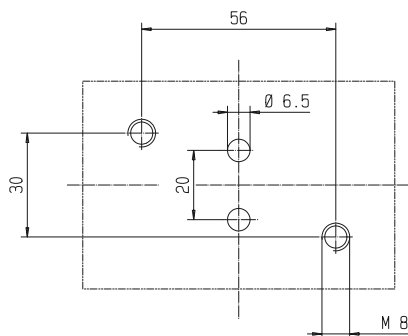

Description

Now in the segment of the VOLUME Valve Position Indicators we offer beside the mechanical variation the electronic solution; the VOLUTRONIC® Valve Position Measuring Instrument VCA 0.2 NB P2/171. The electronic solution provides 2 incremental signals with 90° phase

shift and enables the recognition of the flow direction. The VOLUTRONIC® Valve Position Measuring Instrument VCA 0.2 can be used for a big range of actuator dimensions and Flow rate.

Materials

Housing and cover	Aluminium AlMgSiF30
Gearing	Stainless steel 1.4462

General characteristics

Bearing	Plastic plain bearings
Connection type	Plate mounting

Hydraulic characteristics

Measuring range	0.25 ... 10 l/min
Repeat accuracy	< 0.3 %
max. operating pressure	160 bar
Liquid temperature	- 20 ... + 80 °C
Resolution	5000 pulse/liter

Valve Position Measuring Instrument VC 0.2 P1 PX ATEX

Explosion-proof version (ATEX)


The device fulfils the following protective classes:

II 2 G EEx ia IIC T4


II 2 D Ex iaD 21 T 125 °C

II 2 GD C IIC T4 IP65 T 125 °C

Dimensions

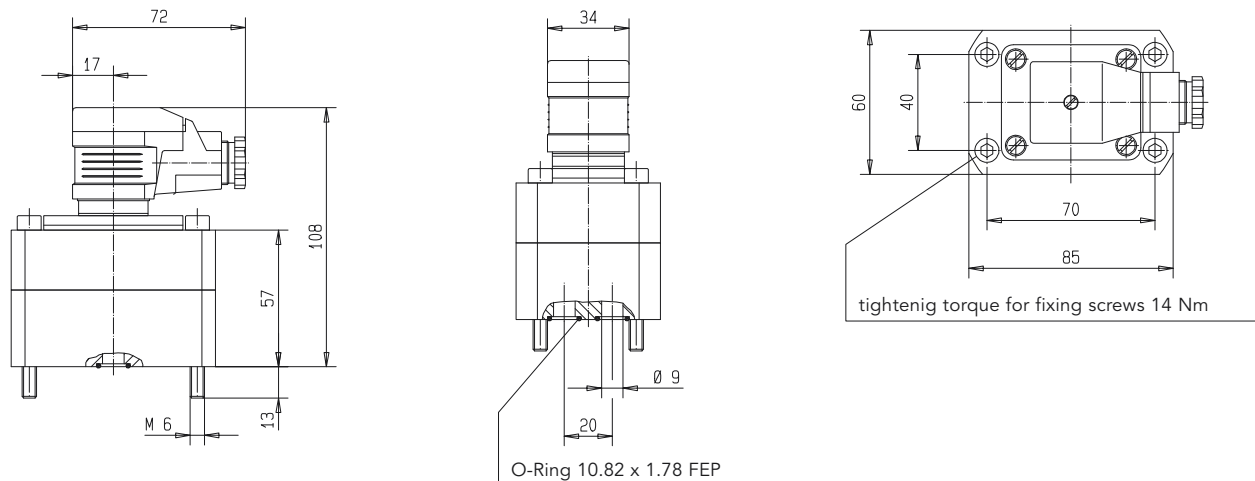

Mounting surface

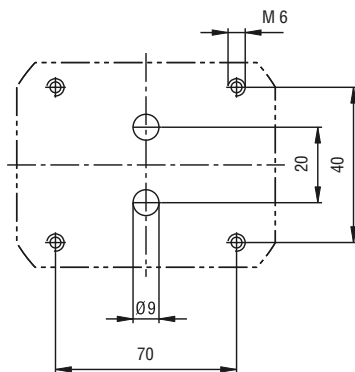

Description

For the valve positions which must be used in intrinsically safe areas (example: Gas tankers) we offer the VOLUTRONIC® Valve Position Measuring Instrument VC 0.2 P1 PX ATEX. Also the explosion-safe execution

provides together with the switching amplifier K 130 two incremental signals with 90° phase shift and enables the recognition of the flow direction.

Materials

Housing and cover	Spheroidal cast iron GGG 40
Gearing	Steel 1.7139

General characteristics

Bearing	Ball bearings
Connection type	Plate mounting

Hydraulic characteristics


Measuring range	0.16 ... 16 l/min
Repeat accuracy	< 0.1 %
Starting point	0.01 l/min
max. operating pressure	400 bar
Liquid temperature	- 30 ... + 80 °C
Resolution	4081.63 pulse/liter

Valve Position Measuring Instrument VC 0.2 P1 PX ATEX

Explosion-Proof Design (ATEX)

Function

- The explosion-protected execution passes of the VOLUTRONIC® Valve Position Measuring Instrument VC 0.2 P1 PX-ATEX (own-sure electric equipment) and the switch amplifier K 130 (accompanying electric equipment). To this construction counts the type of protection "intrinsic safety".
- The VOLUTRONIC® Valve Position Measuring Instrument is installed in the explosion-threatened area.
- The assembly of the switch amplifier K 130 occurs in the sure area.
- VOLUTRONIC® Valve Position Measuring Instrument and switch amplifier are connected electrically with each other. The switch amplifier evaluates the sensor signals of the Valve Position Measuring Instrument and converts them into square-wave signals.
- Without switch amplifier the VOLUTRONIC® Valve Position Measuring Instrument may be pursued not in the explosion-threatened area.
- Between Valve Position Measuring Instrument and switch amplifier cable lengths to 400 m are possible.
- In the switch amplifier are LED's to the control of management break/short circuit, canal-switch state and tension care.

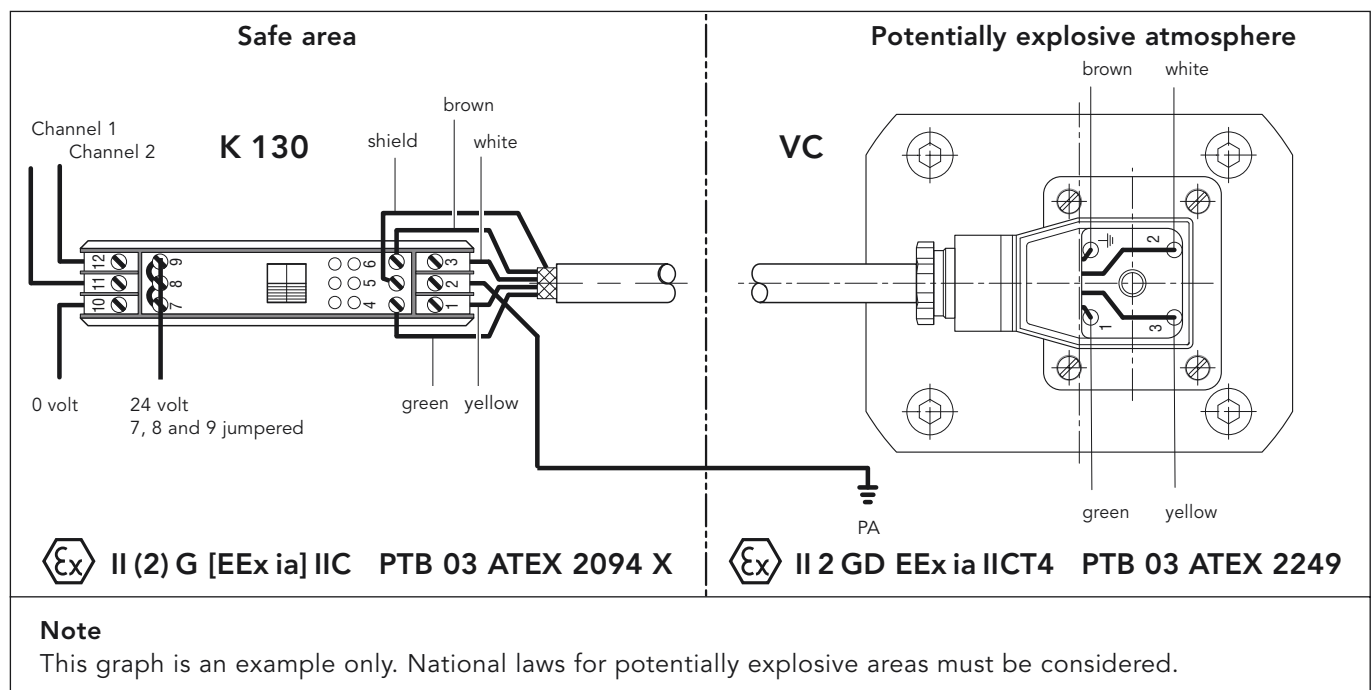

Technical data of switching amplifier K-130/3-E-10

Power supply

Supply voltage cl. 7 (L+), cl. 10 (L-)
Ripple content white Wss

DC 24 volt $\pm 20\%$
< 10 %

Outputs (non-intrinsically safe)

Characteristics cl. 9, 12, 8, 11

Electronics outputs
Short-circuit current
Signal level 1-signal
Signal level 0-signal

electrically isolated via optoelectronic coupler
approx. 25 mA
0.8 x supply voltage with $R_L > 2\text{ k ohm}$
inhibited output, residual current < 10 uA

Ambience conditions

Minimum limiting temperature
Maximum limiting temperature

248 K (-25 °C)
333 K (+60 °C)

Mechanics

Dimensions
Connection possibility
Weight

107.5 x 92 x 22 mm
can be snapped on a 35 mm mounting channel DIN 46277
approx. 150 g

Valve Position Measuring Instrument VC 0.2 P1 PX ATEX

Recording of the application datas for KRACHT Valve positions indicators components		
Customer		
Quantity		
Fluid		
Viscosity		mm ² /s
Flow rate		l/min
Actuator displacement		cm ³
operating pressure		bar
Setting of temperature pressure relief valve		bar
Liquid temperature		°C
Environment temperature		°C
Distance between Volumec and Valve		m
Inner diameter of piping		mm
Needed output	indication	
	indication + open/close switches	
	indication + potentiometer	
	indication + open/close switches + potentiometer	
if potentiometer, max. wiper current		mA
zone, in case of hazardous area		
Function of directional control valve	4/3 spring centered	
	4/2 with detend	
	4/2 spring return	
closing time of the actuator		sec.
Armatur	type of armatur	name of producer
	single acting actuator (spring return)	
	double acting actuator (Rack and pinion)	
	double acting actuator (Scotch yoke)	
	linear actuator (spring return)	

Declaration for Apparatus without an own Potential Ignition Source in Conformity with the Explosion Safety Directive 94/9/EC (ATEX 95)

Kracht GmbH hereby declares that the switches and/or potentiometers in the Volumec indicating device

are not

- a. safety, controlling and regulating devices,
- b. equipment,
- c. protective systems or
- d. components

in accordance with Directive 94/9/EC, Article 1 paragraphs 2 and 3

The switches and/or potentiometers are used potential-free as simple apparatus in intrinsically safe circuits, with a max. operating temperature of 60°C the supplied output P_i may not exceed a value of 1.2 Watt. The switches and/or potentiometers **are not marked** in accordance with the ATEX Directive.

An internal ignition risk assessment was carried out and an internal confidential test report PB62060405 drawn up on this.

The switches and/or potentiometers can be used as follows, taking account of the applicable installations rules for machinery, appliances and installations in potentially explosive areas, e.g. EN 60079-14:

- a) In Group II Zone 2 (Gas-Ex, Category 3G) Explosion Groups IIA, IIB and IIC
- b) In Group II Zone 1 (Gas-Ex, Category 2G) Explosion Groups IIA, IIB and IIC

The following harmonised standards/specifications were applied in the version that is valid on the date of signature:

- EN 1127-1 Explosive atmospheres, explosion protection, part 1: Fundamental principles and methods
- EN 50020 Electrical apparatus for potentially explosive atmospheres, part 7: Intrinsic safety

Important information:

- The maximum surface temperatures depend on the mounting situation and are the responsibility of the customer or the operator. In normal use the threshold values of temperature class T4 cannot be reached.
- All external materials consist of suitable low-sparking materials. However, the operator is responsible for checking the danger of ignition through sparking when the complete machine is operated. Light-metal parts must be mounted protected against external impact energy.
- The listed components are suitable for ambient temperatures of -20°C .. +60°C. Temperature class T4 is complied with.
- With an ambient temperature of 60°C the output P_i of the supply circuit may not exceed 1.2 Watt.
- Compliance with the information in the manufacturer's operating instructions is mandatory.

Werdohl, 8 May 2006

Place and date


Heiko Zahn, Managing Director

KRACHT®

KRACHT GmbH · Gewerbestraße 20 · 58791 Werdohl, Germany
Phone +49 2392 935 0 · E-Mail info@kracht.eu · Web www.kracht.eu