

Australia

Stauff Corporation (Pty.) Ltd.
P.O.Box 227, 24-26 Doyle Avenue,
Unanderra Wollongong, N.S.W
2526 AUSTRALIA
Tel: +61 2 42 71 18 77
Fax: +61 2 42 71 84 32

Brazil

Stauff Brasil Ltda.
Av. Gupê 10767
Galpão 2 – Bloco A
Barueri – São Paulo – CEP 06422-120, BRAZIL
Tel: +55 (0)11-4789-9020
Fax: +55 (0)11-4789-9021

Canada

Stauff Canada Ltd.
866 Milner Avenue
Scarborough, Ontario M1B 5N7, CANADA
Tel: +1 416 282 46 08
Fax: +1 416 282 30 39

China

Stauff International Trading (Shanghai) Co., Ltd.
Shangdian Mansion, Pudong
331, Binzhou Road
200126 Shanghai, CHINA
Tel: +86 21 58 45 65 60
Fax: +86 21 58 45 66 80

France

Stauff S.A.
Z.I. de Vineuil-Blois Sud
230, Avenue du Grain d'Or
41354 Vineuil-cedex, FRANCE
Tel: +33 2 54 50 55 50
Fax: +33 2 54 42 29 19

India

Stauff India Pvt. Ltd.
Gat. No. 2340,
Pune-Nagar Road, Wagholi, INDIA
IND-Pune - 412027
Tel: +91 20 705 19 90
Fax: +91 20 705 19 89

Italy

Stauff Italia S.R.L.
Via Pola 21/23, I-20034
Birone di Giussano, ITALY
Tel: +39 0362 31 21 13
Fax: +39 0362 33 55 36

New Zealand

Stauff Corporation (NZ) Ltd.
Unit J. 150 Harris Road, P.O. Box 58517
Greenmount Auckland-NEW ZEALAND
Tel: +64 9 271 4812
Fax: +64 9 271 4832

United Kingdom

Stauff UK Ltd.
332, Coleford Road Darnall
Sheffield, S 9 5 P H, ENGLAND
Tel: +44 1142 518 518
Fax: +44 1142 518 519

USA

Stauff Corporation
7 Wm. Demarest Place
Waldwick, NJ – 07463, USA
Tel: +1 201 444 78 00
Fax: +1 201 444 78 52

**Distributors and warehouses
in all industrial countries.**

Walter Stauffenberg GmbH & Co. KG

P. O. Box 17 45 · D-58777 Werdohl · Germany
Im Ehrenfeld 4 · D-58791 Werdohl · Germany
Tel.: +49 (0) 23 92 9 16-0
Fax: +49 (0) 23 92 25 05
E-mail: sales@stauff.com
Internet: <http://www.stauff.com>

Stauff Filtration Technology

Stauff Filtration Technology offers a complete range of filtration products and services that will provide the system designer or user with the highest level of contamination control demanded by today's most sophisticated applications. Products include pressure filters, return line filters, elements, spin on filters suction strainers, and filler breathers for various hydraulic, lubrication and fuel oils.

Stauff has the technical expertise to provide superior filter element designs for the Stauff original filter housings and also for the interchange element market. Stauff manufactures more than 10,000 different elements. Many of these are designed to fit into filter housings produced by other companies while maintaining or surpassing the original performance.

The "Stauff Contamination Control Program" includes the diagnostic services including fluid sampling and laser particle counting products needed to monitor the system contamination level.

Stauff, through its global network of wholly owned companies and technically qualified distributors, is ideally placed to assist its customers in the total contamination process providing a well balanced filtration solution.

	Page
Return Line Duplex Filter SRFL-S/D	
Technical Data	3
Return Line Simplex Filter SRFL-S 160-600	
Dimensions	4
Return Line Simplex Filter SRFL-S 1200-3600	
Dimensions	5
Return Line Duplex Filter SRFL-D 160-600	
Dimensions	6
Return Line Duplex Filter SRFL-D 1200-2400	
Dimensions	7
Return Line Duplex Filter SRFL-D 3600	
Dimensions	8
Return Line Filter SRFL-S/D	
Ordering Code	9
Filter Elements RE & Options	10
Flow Characteristics	11

Technical Data

STAUFF return line simplex filter SRFL-S and duplex filter SRFL-D are designed for in-line hydraulic applications. With its compact construction and the easy to maintain assembly the filter SRFL-S and SRFL-D are suitable for flow rates up to 6600 l/min (1750 US GPM). The two housings of the duplex filter, SRFL-D are connected with a special gate valve that is operated with a lever or hand wheel. Therefore the filter may be serviced without shutting down the hydraulic system. A high efficiency of contaminant removal is assured by using STAUFF replacement filter elements RE series. The high dirt holding capacity of STAUFF elements ensures a long service life and, as a result, reduced maintenance costs.



Technical Specification


Construction	In-line assembly, base mounted	By-pass valve (integrated in the filter element)	Opening pressure 3 bar $\pm$ 0,3 bar (43,5 PSI $\pm$ 4,35 PSI) other pressures on request
Housings	Carbon steel Stainless steel (on request)	Clogging indicator	Differential pressure switch, setting 1,6 bar (23 PSI) scale 0...1,6 bar (0...23 PSI)
Seals	NBR (Buna-N®), FPM (Viton®)	Filter elements	Specification see page 10
Port connection	ANSI, SAE and DIN flanges	Media	Mineral oils, lubrication oils other fluids on request
Operating pressure	max 14 bar (232 PSI)		
Flow rating	up to 6600 l/min (1750 US GPM)		
Temperature Range	-10°C up to +100°C (14°F up to 212°F)		

Dimensions SRFL-S 160 / 200 / 300 / 600

Detail arrangement of filter elements



SRFL-S 160 / 200 / 300 / 600


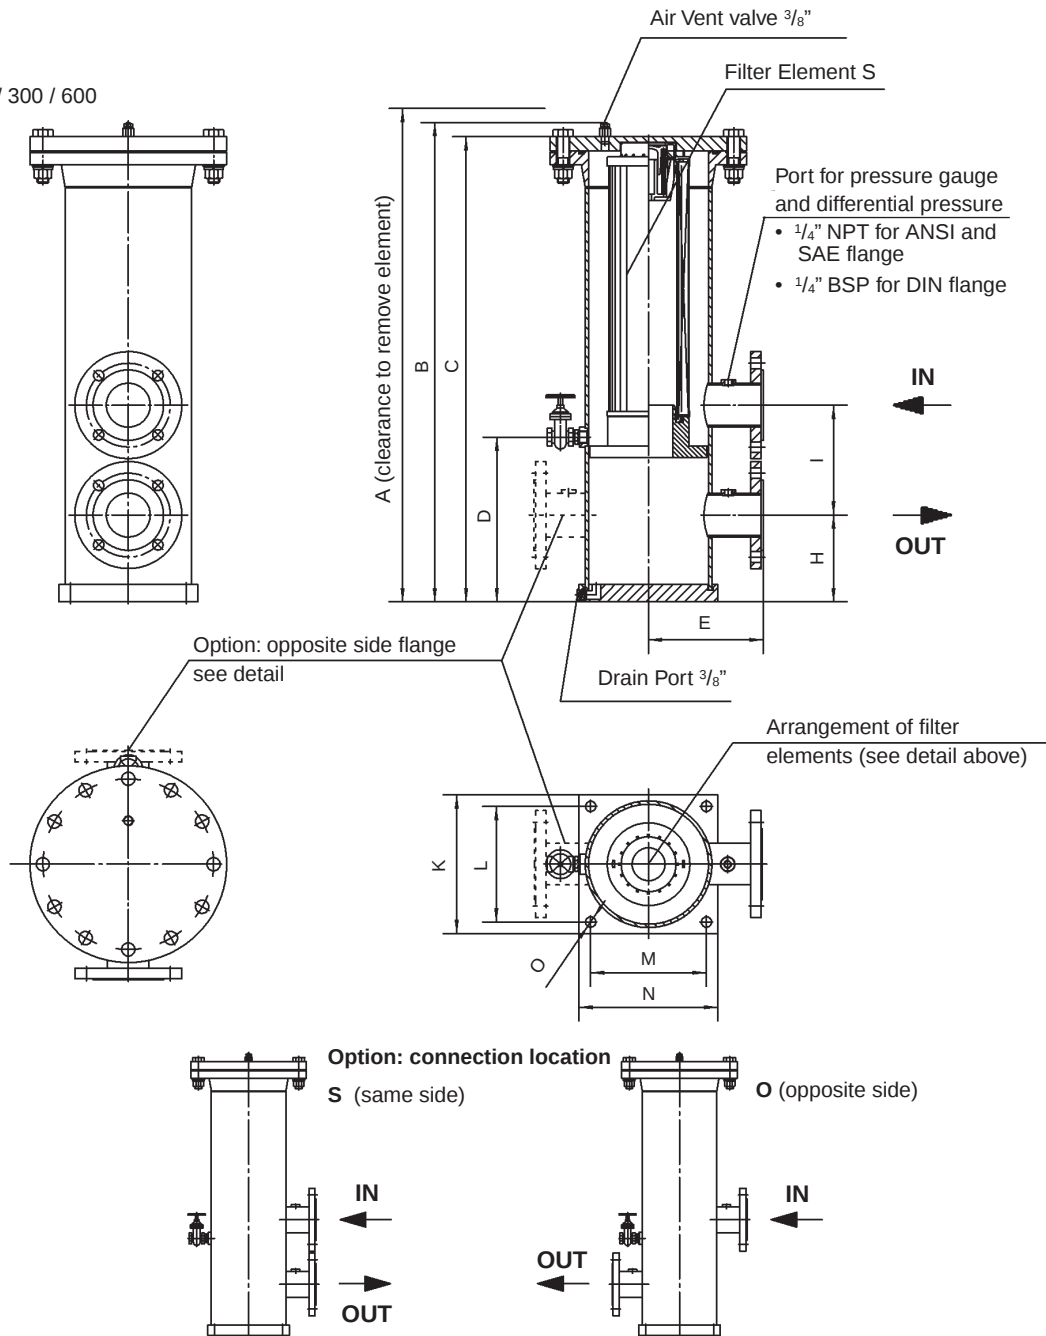


All dimensions in mm (inch)

Filter Size	Flange Connection			Dimensions												Total oil Capacity		Weight (without element)		Filter Element S	
	DIN	ANSI	SAE	A	B	C	D	E	H	I	K	L	M	N	O	l	gal	kg	lbs	Designation	Qty
SRFL-S-160	DN40	1-1/2"	1-1/2"	885,8 (34,87)	607,6 (23,92)	584 (22,99)	214 (8,43)	148 (5,83)	130 (5,12)	155 (6,1)	150 (5,91)	125 (4,92)	125 (4,92)	150 (5,91)	11 (0,43)	6,0	1,59	14,5	32	RE-160...	1 x 1
SRFL-S-200	DN50	2"	2"	1045,8 (41,17)	688,7 (27,12)	664 (26,14)	214 (8,43)	148 (5,83)	140 (5,51)	190 (7,48)	150 (5,91)	125 (4,92)	125 (4,92)	150 (5,91)	11 (0,43)	7,1	1,86	15,9	35	RE-200...	1 x 1
SRFL-S-300	DN65	2-1/2"	2-1/2"	1248,7 (49,16)	828,6 (32,63)	803,9 (31,65)	285 (11,22)	198 (7,8)	150 (5,91)	190 (7,48)	240 (9,45)	200 (7,87)	200 (7,87)	240 (9,45)	18 (0,71)	22,2	5,87	29	64	RE-300...	1 x 1
SRFL-S-600	DN80	3"	3"	2126,7 (83,73)	1267,6 (49,91)	1242,9 (48,93)	285 (11,22)	198 (7,8)	160 (6,3)	220 (8,66)	240 (9,45)	200 (7,87)	200 (7,87)	240 (9,45)	18 (0,71)	37,1	9,80	34,5	76	RE-600...	1 x 1

Dimensions SRFL-S 1200 / 1800 / 2400 / 3600


Detail arrangement of filter elements

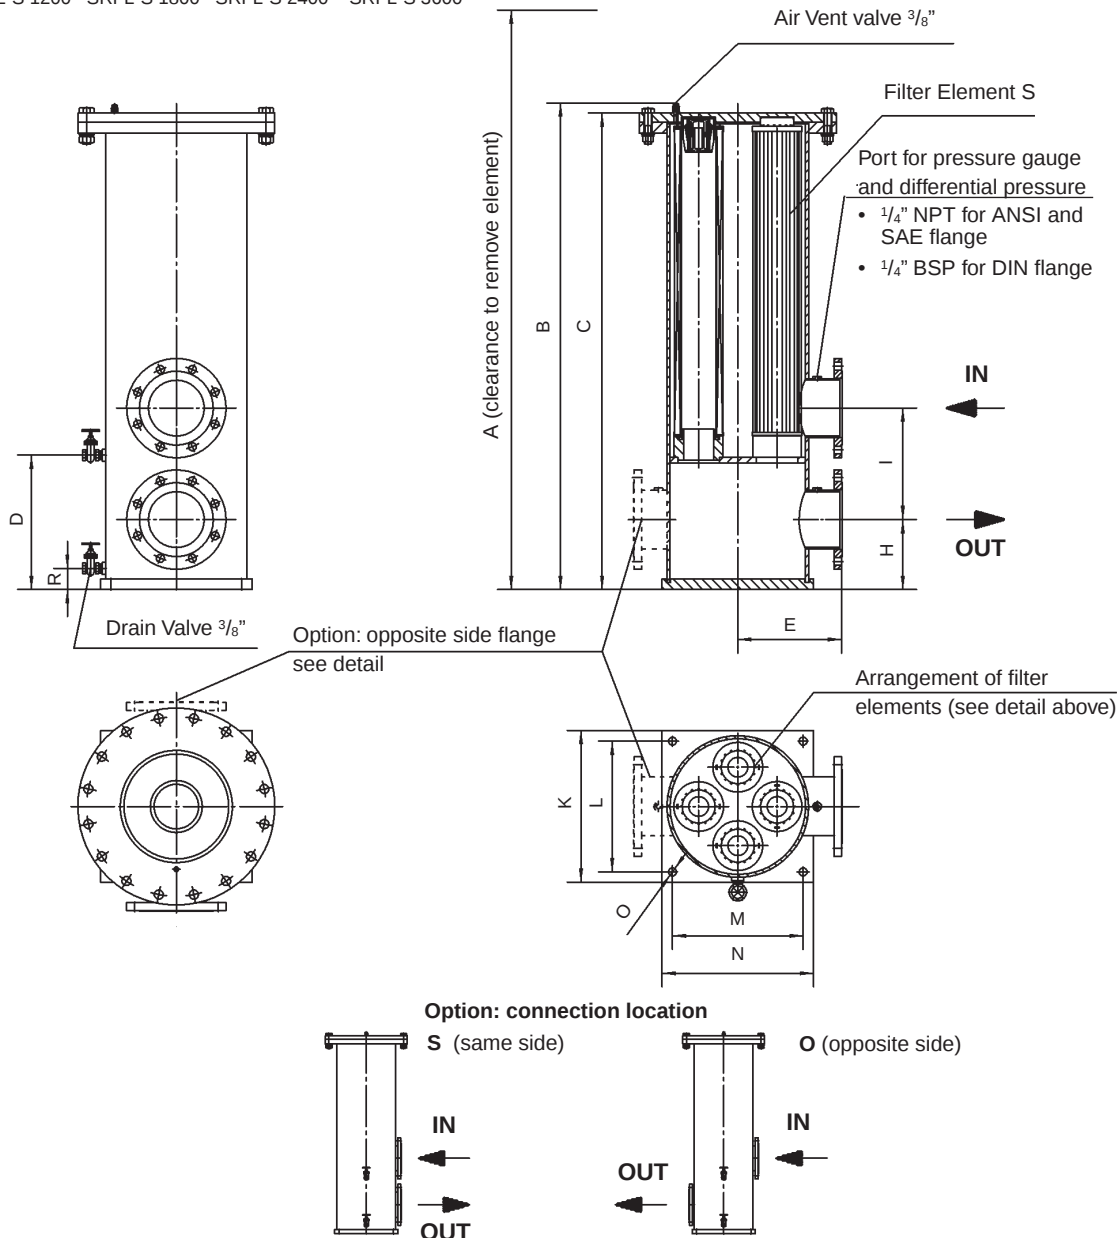

All dimensions in mm (inch)

Filter Size	Flange Connection			Dimensions													Total oil Capacity		Weight (without element)		Filter Element S	
	DIN	ANSI	SAE	A	B	C	D	E	H	I	K	L	M	N	O	R	I	gal	kg	lbs	Designation	Qty
SRFL-S-1200	DN100	4"	4"	2176,7 (85,7)	1319,6 (51,96)	1294,9 (50,98)	275 (10,83)	273 (10,75)	190 (7,48)	250 (9,84)	385 (15,16)	325 (12,8)	325 (12,8)	385 (15,16)	23 (0,91)	60 (2,36)	103	27,2	86,2	190	RE-600...	1 x 2
SRFL-S-1800	DN125	5"	5"	2176,7 (85,7)	1323,6 (52,11)	1294,9 (50,98)	275 (10,83)	273 (10,75)	190 (7,48)	280 (11,02)	385 (15,16)	325 (12,8)	325 (12,8)	385 (15,16)	23 (0,91)	60 (2,36)	103	27,2	90,7	200	RE-600...	1 x 3
SRFL-S-2400	DN150	6"	6"	2249,1 (88,55)	1394,8 (54,92)	1366,1 (53,78)	325 (12,8)	298 (11,73)	200 (7,87)	320 (12,6)	435 (17,13)	375 (14,76)	375 (14,76)	435 (17,13)	23 (0,91)	60 (2,36)	149	39,3	105,2	232	RE-600...	1 x 4
SRFL-S-3600	DN200	8"	8"	2249,1 (88,55)	1392,8 (54,84)	1368,1 (53,68)	325 (12,8)	398 (15,67)	252 (9,92)	425 (16,73)	540 (21,26)	480 (18,9)	480 (18,9)	540 (21,26)	23 (0,91)	60 (2,36)	232	61,3	154,2	340	RE-600...	1 x 6

Dimensions SRFL-D 160 / 200 / 300 / 600

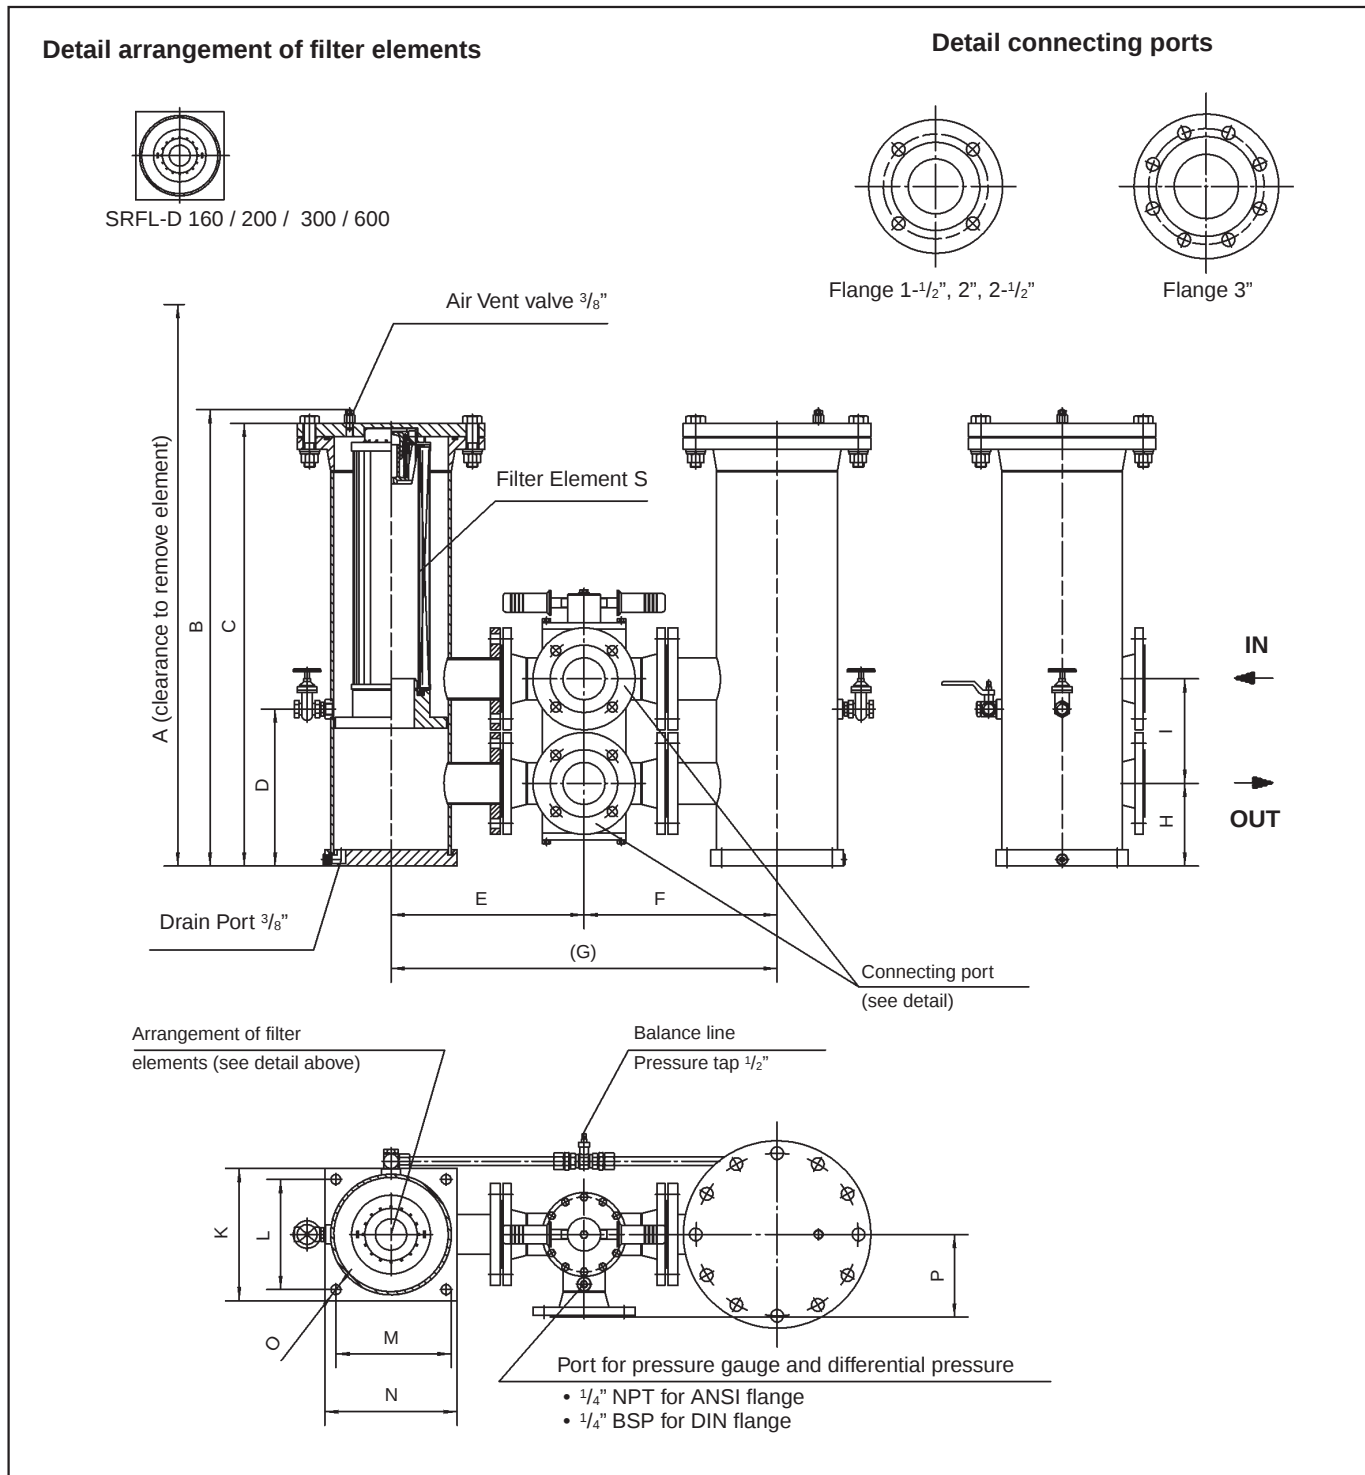


All dimensions in mm (inch)


Filter Size	Flange Connection		Dimensions															Total oil Capacity		Weight (without element)		Filter Element S	
	DIN	ANSI	A	B	C	D	E	F	G	H	I	K	L	M	N	O	P	l	gal	kg	lbs	Designation	Qty
SRFL-D-160	DN 40	1-1/2"	885,8 (34,87)	607,6 (23,92)	584 (22,99)	214 (8,43)	260 (10,24)	260 (10,24)	520 (20,47)	130 (5,12)	155 (6,1)	150 (5,91)	125 (4,92)	125 (4,92)	150 (5,91)	11 (0,43)	110 (4,33)	6,02	1,59	43	95	RE-160...	2 x 1
SRFL-D-200	DN 50	2"	1045,8 (41,17)	688,7 (27,12)	642 (25,28)	214 (8,43)	300 (11,81)	300 (11,81)	600 (23,62)	140 (5,51)	190 (7,48)	150 (5,91)	125 (4,92)	125 (4,92)	150 (5,91)	11 (0,43)	150 (5,91)	7,11	1,86	56,7	125	RE-200...	2 x 1
SRFL-D-300	DN 65	2-1/2"	1248,7 (49,16)	828,6 (32,63)	803,9 (31,65)	285 (11,22)	350 (13,78)	350 (13,78)	700 (27,56)	150 (5,91)	190 (7,48)	240 (9,45)	200 (7,87)	200 (7,87)	240 (9,45)	18 (0,71)	150 (5,91)	22,24	5,87	84	185	RE-300...	2 x 1
SRFL-D-600	DN 80	3"	2126,7 (83,73)	1267,6 (49,91)	1242,9 (48,93)	285 (11,22)	375 (14,76)	375 (14,76)	750 (29,53)	160 (6,3)	220 (8,66)	240 (9,45)	200 (7,87)	200 (7,87)	240 (9,45)	18 (0,71)	175 (6,89)	37,1	9,8	104	230	RE-600...	2 x 1

Dimensions SRFL-D 1200 / 1800 / 2400

Detail arrangement of filter elements

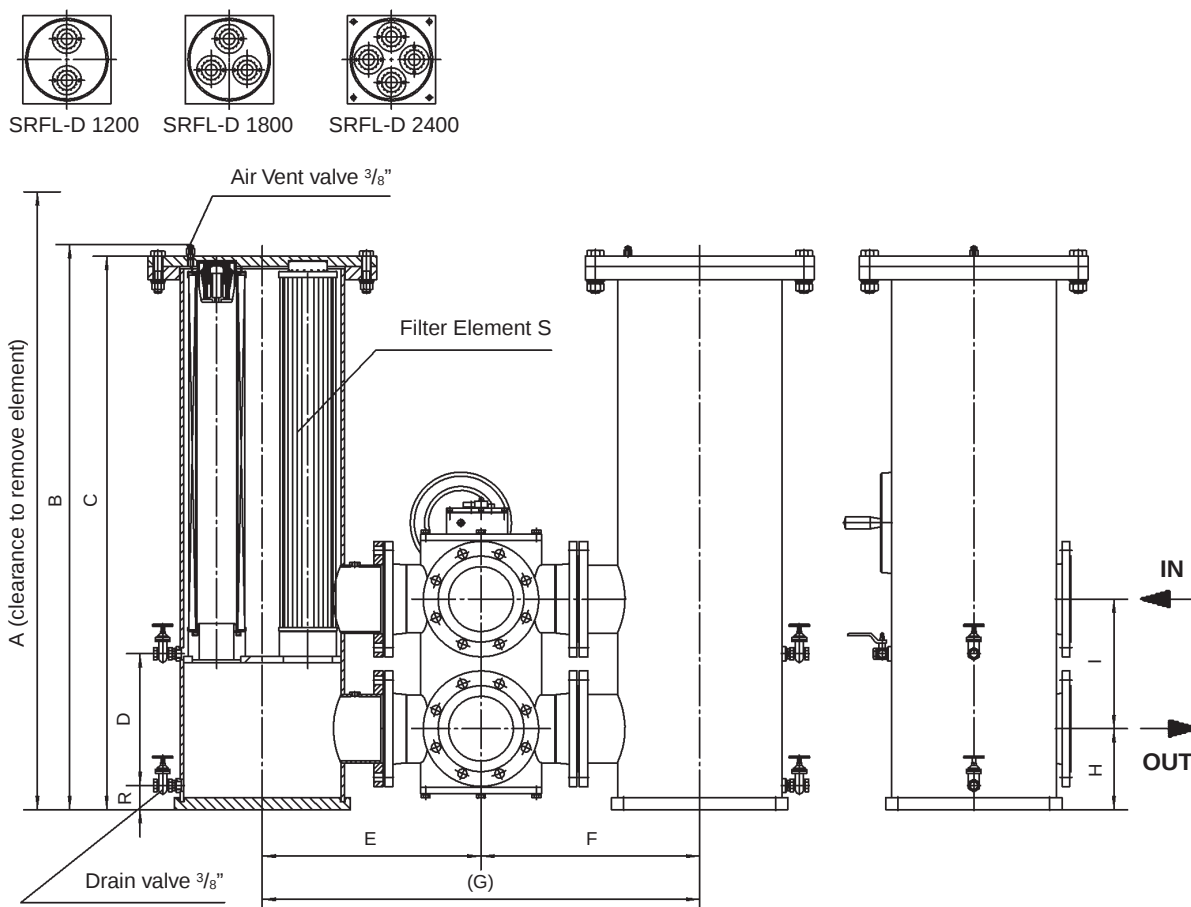

Arrangement of filter elements (see detail above)

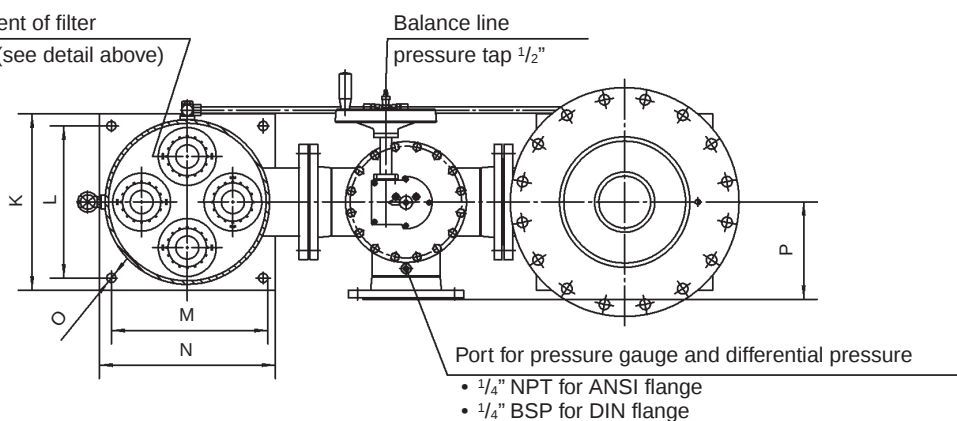


All dimensions in mm (inch)


Filter Size	Flange Connection		Dimensions																Total oil Capacity		Weight (without element)		Filter Element S	
	DIN	ANSI	A	B	C	D	E	F	G	H	I	K	L	M	N	O	P	R	l	gal	kg	lbs	Designation	Qty
SRFL-D-1200	DN 100	4"	2176,7 (85,7)	1319,6 (51,96)	1294,9 (50,98)	275 (10,83)	475 (18,7)	475 (18,7)	950 (37,4)	190 (7,48)	250 (9,84)	385 (15,16)	325 (12,8)	325 (12,8)	385 (15,16)	23 (0,91)	200 (7,87)	60 (2,36)	103	27,2	215	475	RE-600...	2 x 2
SRFL-D-1800	DN 125	5"	2176,7 (85,7)	1323,6 (52,11)	1294,9 (50,98)	275 (10,83)	500 (19,69)	500 (19,69)	1000 (39,37)	190 (7,48)	280 (11,02)	385 (15,16)	325 (12,8)	325 (12,8)	385 (15,16)	23 (0,91)	225 (8,86)	60 (2,36)	103	27,2	233	515	RE-600...	2 x 3
SRFL-D-2400	DN 150	6"	2249,1 (88,55)	1394,8 (54,92)	1366,1 (53,78)	325 (12,8)	540 (21,26)	540 (21,26)	1080 (42,52)	200 (7,87)	320 (12,6)	435 (17,13)	375 (14,76)	375 (14,76)	435 (17,13)	23 (0,91)	240 (9,45)	60 (2,36)	149	39,3	263	580	RE-600...	2 x 4

Dimensions SRFL- D 3600

Detail arrangement of filter elements

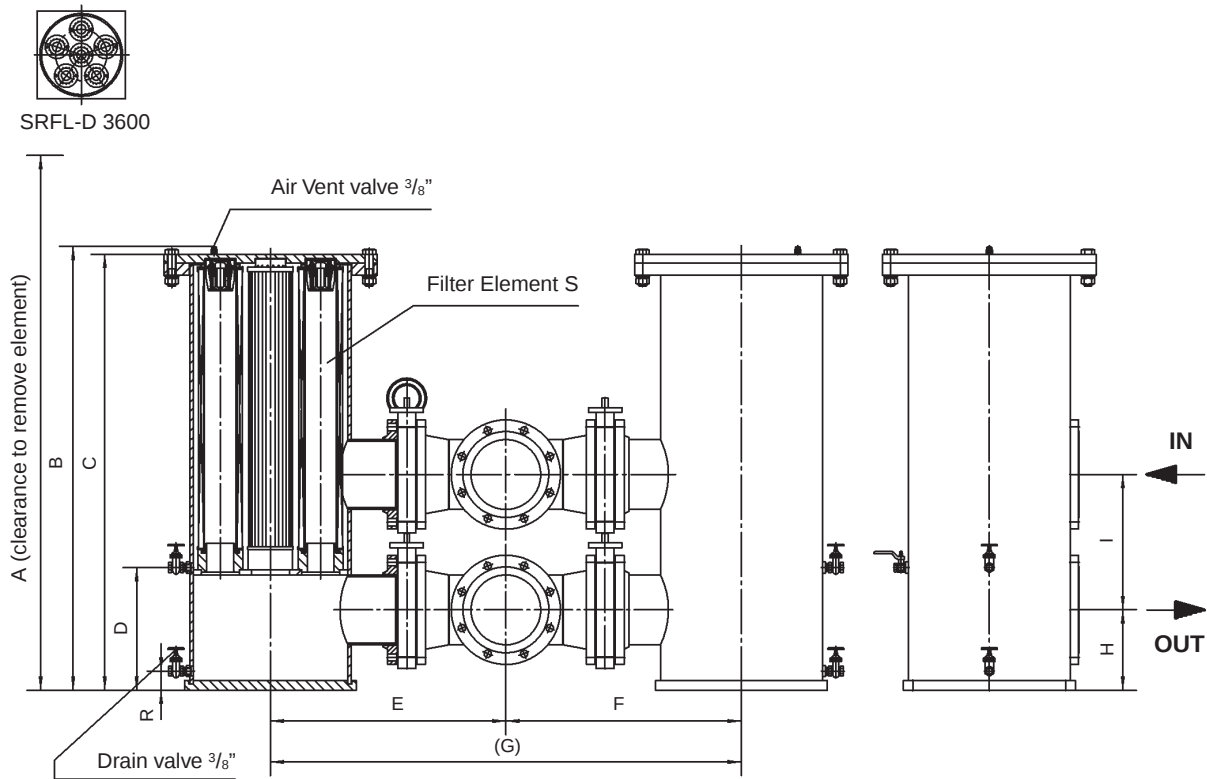

Arrangement of filter elements (see detail above)

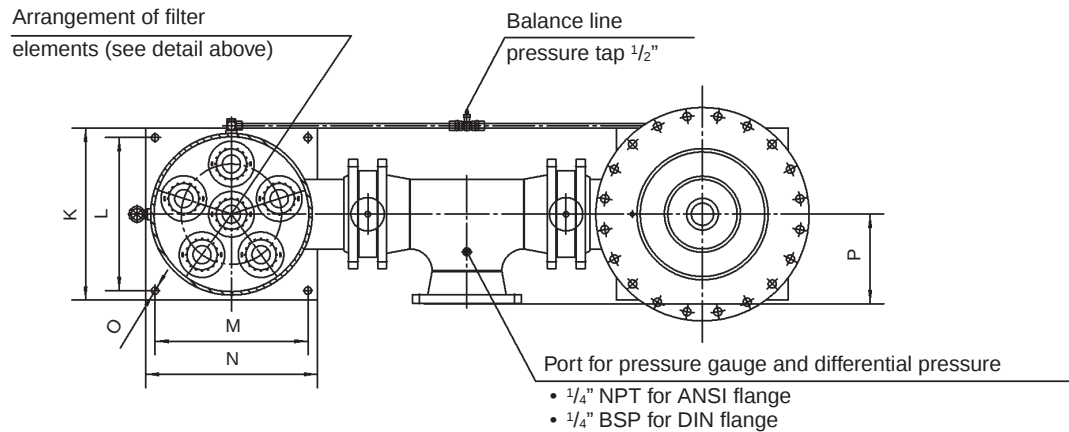

All dimensions in mm (inch)

Filter Size	Flange Connection		Dimensions																Total oil Capacity		Weight (without element)		Filter Element S	
	DIN	ANSI	A	B	C	D	E	F	G	H	I	K	L	M	N	O	P	R	I	gal	kg	lbs	Designation	Qty
SRFL-D-3600	DN 200	8"	2249,1 (88,55)	1392,8 (54,84)	1368,1 (53,86)	325 (12,8)	739 (29,11)	739 (29,11)	1479 (58,22)	252 (9,92)	425 (16,73)	540 (21,26)	480 (18,9)	480 (18,9)	540 (21,26)	23 (0,91)	281,4 (11,08)	60 (2,36)	233	61,3	390	860	RE-600...	2 x 6

Ordering Code Filter Housings

Filter type

SRFL-S	Return Line Simplex Housing
SRFL-D	Return Line Duplex Housing

Group

Size	Flow	
	l/min	US GPM
160	900	240
200	900	240
300	1400	370
1200	1400	370
1800	4000	1050
2400	4000	1050
3600	7000	1850

For complete filters:

Identification filter material
+ micron rating code
(See ordering code filter elements below)

Seal material

B	NBR (Buna®)
V	FPM (Viton®)

Other seal material on request

Design code

Only for information

Clogging indicator

O	Without clogging indicator
D	Differential pressure switch

Other indicators on request

Material Housing

CS	Carbon steel
SS	Stainless steel

Connection location

O	Opposite side
S	Same side

Omit for SRFL-D series

Connection style		Group							
Code	Connection style	160	200	300	600	1200	1800	2400	3600
A	ANSI flange	1-1/2"	2"	2-1/2"	3"	4"	5"	6"	8"
S	SAE flange (omit for SRFL-D)	1-1/2"	2"	2-1/2"	3"	4"	5"	6"	8"
D	DIN flange	DN 40	DN 50	DN 65	DN 80	DN 100	DN 125	DN 150	DN 200

Ordering Code Filter Elements

Series

RE

Group

Size	Filter Element	
	Designation	Quantity SRFL-S SRFL-D
160	RE-160	1 x 1 2 x 1
200	RE-200	1 x 1 2 x 1
300	RE-300	1 x 1 2 x 1
600	RE-600	1 x 1 2 x 1
1200	RE-600	1 x 2 2 x 2
1800	RE-600	1 x 3 2 x 3
2400	RE-600	1 x 4 2 x 4
3600	RE-600	1 x 6 2 x 6

Filter material

Code	Material	max Δp* collapse	Micron ratings available
A	Stainless fiber	30 bar (435 PSI)	03, 05, 10, 20
N	Filter paper	16 bar (232 PSI)	
G	Inorganic glass fiber	30 bar (435 PSI)	
S	Stainless mesh	30 bar (435 PSI)	10, 25, 50, 100, 200, 500

*Collapse / burst resistance as per ISO 2941

Design code

Only for information

Seal material

B	NBR (Buna®)
V	FPM (Viton®)

Other seal materials on request

Micron rating

03	3 μm
05	5 μm
10	10 μm
20	20 μm
10	10 μm
25	25 μm
50	50 μm
100	100 μm
200	200 μm
200	500 μm

Other micron ratings on request

1. Replacement Filter Elements RE

STAUFF replacement filter elements for SRFL-S and SRFL-D series filters are manufactured in the common filter materials such as stainless fiber, stainless mesh, paper and inorganic glass fiber. As standard all replacement elements series RE have tin plated steel parts for use with aggressive media such as water glycol, on request you also can get other materials. All replacement elements made by STAUFF comply with quality specifications in accordance with international standards.



RE-300 G 10 V /X

Series	RE
---------------	----

Group	According to filter housing (See ordering code page 9)
--------------	---

Filter material			Micron ratings available
Code	Material	max Δp^* collapse	
A	Stainless fiber	30 bar (435 PSI)	03, 05, 10, 20
N	Filter paper	16 bar (232 PSI)	
G	Inorganic glass fiber	30 bar (435 PSI)	
S	Stainless mesh	30 bar (435 PSI)	10, 25, 50, 100, 200, 500

*Collapse / burst resistance as per ISO 2941

Design code	Only for information
--------------------	----------------------

Seal material	
B	NBR (Buna®)
V	FPM (Viton®)
other seal materials on request	

Micron rating	
03	3 μ m
05	5 μ m
10	10 μ m
20	20 μ m
10	10 μ m
25	25 μ m
50	50 μ m
100	100 μ m
200	200 μ m
500	500 μ m
Other micron ratings on request	

2. Differential Pressure Switch with visual gauge indicator

The switch is used to indicate when the elements need changing. The switch can turn on a light, shut down the machine or any further function controlled by an electrical signal. The gauge visually indicates the differential pressure across the filter elements.

Diameter	100 mm (6,9")
Scale	0 ... 1,6 bar (0 ... 23 PSI)
Connection thread	1/4 "
Working pressure	Max 200 bar (2900 PSI)
Temperature range	-20 °C up to +80 °C (-4 °F up to +176 °F)
Body	Aluminium
Lens	Glass
Seal	NBR (Buna-N®) FPM (Viton®)















Protection system	IP 65
Switch Voltage	max 28 V AC/DC
Current on Contact	max 0,25 A AC/DC
Contact Rating	5 VA AC/DC

Other data on request

Flow Characteristics of Return-line Filters SRFL-S and SRFL-D

The following characteristics are valid for mineral oils with a density of 0,85 kg/dm³ and the kinematic viscosity of 30 mm²/s. The characteristics have been determined in accordance to ISO 3968. The housing pressure drop is directly proportional to the oil density.

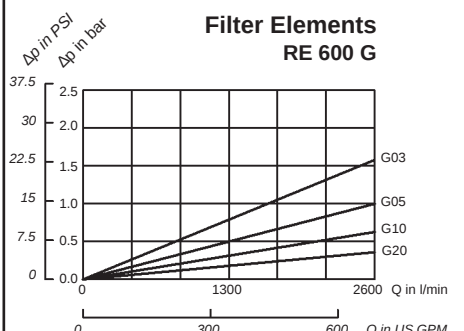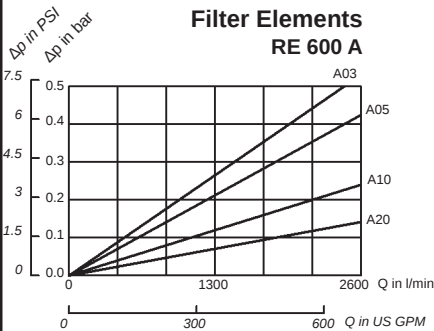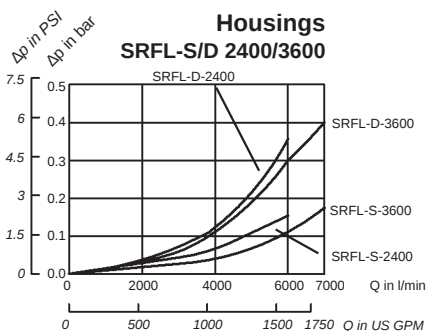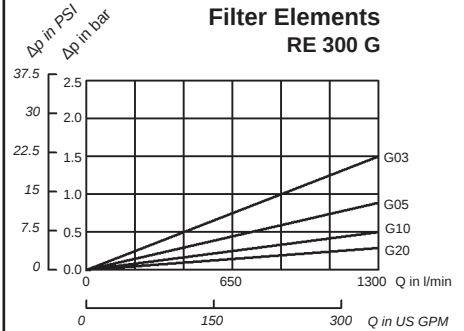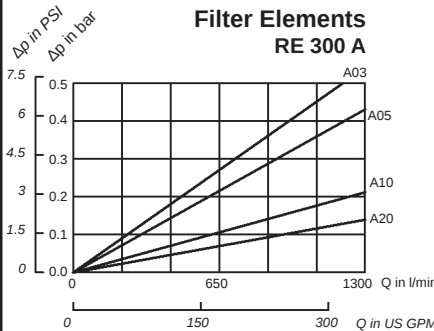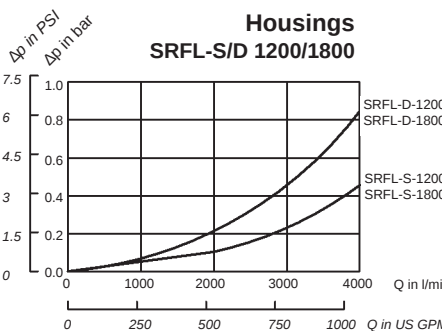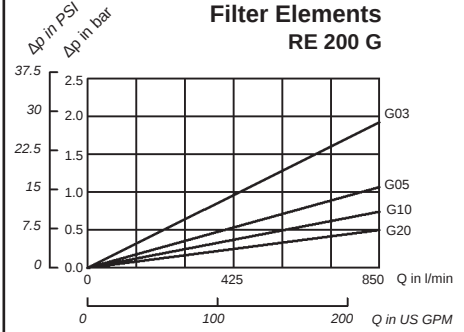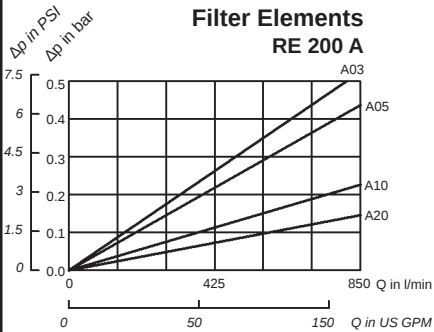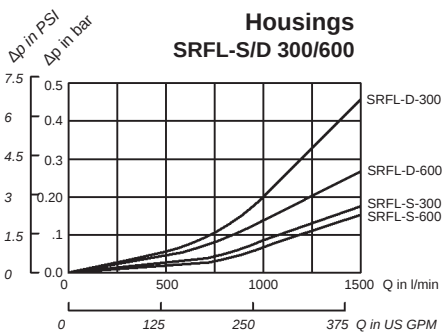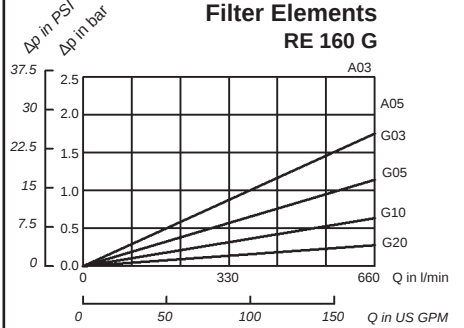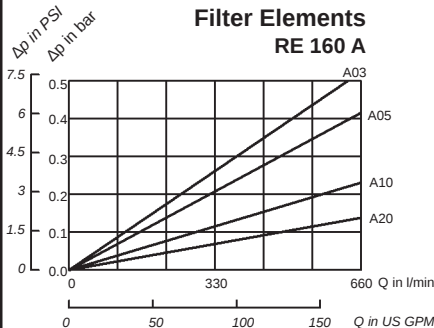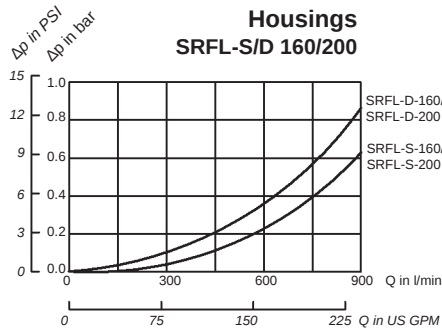

Pressure drop of housing including filter elements

General: $\Delta p_{total} = \Delta p_{housing} + \Delta p_{element} \times (\text{operating viscosity [mm}^2\text{/s]} / 30\text{mm}^2\text{/s})$
 with $\Delta p_{housing}$ see diagrams above
 $\Delta p_{element}$ pressure drop of element at a flow Q/n (at a viscosity of 30 mm²/s) and n = numbers of elements as listed in ordering code filter elements see page 9) see diagrams above.

Example

Data given $Q_{max} = 6000$ l/min (1585 US GPM), RFL-D-2400 with filter elements RE-600S25B;
 operating viscosity = 100 mm²/s
 $Q_{max} = 6000$ l/min; $n=4$ elements (SRFL-D-2400) $Q/n=1500$ l/min (396 gal)
 $\Delta p_{housing} = 0,35$ bar (5,07 PSI), $\Delta p_{element} = 0,043$ bar (0,62 PSI)
 Pressure drop: $\Delta p_{total} = 0,35$ bar + $0,043$ bar $\times (100 \text{ mm}^2\text{/s} / 30\text{mm}^2\text{/s})$
 = 0,49 bar (7,16 PSI)

